

WEVER & DUCRÉ
LIGHTING

LIFE IS TOO SHORT FOR BORING LIGHTING



WEVER & DUCRÉ

LIGHTING

DESIGNER FAMILIES

ROOMOR 26 — 49
- SUSPENDED 27
- OFFICE SUSPENDED 31
- OFFICE CEILING 33
- OFFICE ON TRACK 35
- WALL 37
- WALL 45
- TABLE 47
- FLOOR 49

MIRRO 52 — 67
- CEILING 53
- SUSPENDED 55
- WALL 57
- WALL 59
- TABLE 65
- FLOOR 67

DRO 68 — 83
- CEILING 69
- SUSPENDED 71
- WALL 75
- WALL 75
- FLOOR 79
- TABLE 81
- FLOOR 83
- FLOOR 83

WIRO 84 — 113
- DIAMOND 91
- DIAMOND 97
- GLOBE 107
- CONE 109
- CEILING 113
- WALL 111

J.J.W. 114 — 131
- WALL 117
- WALL 119
- CEILING 123
- SUSPENDED 125
- SUSPENDED 127

CEILING RECESSED 134 — 225
- DEEP BIJOU 139
- DEEP PETIT 141
- DEEP 143
- DEEPER 145
- DEEP ADJUST PETIT 147
- DEEP ADJUST 149
- DEEP ADJUST 153
- DEEP ADJUST TRIMLESS 155
- DEEP ASYM ADJUST 157
- DEEP ADJUST FORT 159
- SPINEO 161
- RONY 163
- PIRRO 165
- RON 169
- PLANO PETIT 171
- PLANO 173
- PLANO FORT 175
- STRANGE PETIT 177
- STRANGE 179
- SNEAK TRIM 181
- SNEAK TRIMLESS 183
- MATCH 187
- CENO 1.0 189
- CENO 2.0 191
- BLIEK ROUND PETIT 195
- BLIEK ROUND 197
- BLIEK SQUARE 199
- RUVI 201
- DEEP BIJOU IP65 205
- DEEP IP44 | IP65 207
- DEEPER IP44 209
- TAIO IP65 213
- LUNA ROUND IP44 215
- RINI SNEAK IP44 217
- LUNA SQUARE IP44 219
- PLANO IP44 221
- MIRBI IP44 1.0 223
- MIRBI IP44 2.0 223
- CITY IP44 225

CEILING SURFACE 226 — 313
- ROOMOR OFFICE 33
- MIRRO 53
- DRO 69
- WIRO 113
- J.J.W. 123
- RAY MINI 229
- RAY 231
- BOX MINI 237
- BOX 239
- DOCUS MINI 245
- DOCUS 247
- HEXO MINI 251
- HEXO 253
- PIRRO SPOT 4.1 257
- PIRRO SPOT 2.0 259
- PIRRO SPOT 4.0 259
- PIRRO OPAL 261
- SOLID PETIT 1.0 263
- SOLID PETIT 2.0 263
- SOLID 267
- SIRRO 271

MORE ON THE NEXT PAGE

INDOOR


PLANO PETIT 275


PLANO 279


SARA 281


SQUBE 283


MATCH 289


CENO 291


MICK 295


CLEA 299


CLOCK 301


VENN 303


ROB IP44 305


ROBY IP44 307


TOWNA IP44 309

TAIO IP65 311


MIRBI IP44 1.0 313


MIRBI IP44 2.0 313

TRACKS STREX 314 — 355


48V TRACKS 319


MATCH 325


CENO 327


MICK 331


RAY MINI 335


BOX MINI 337


DOCUS MINI 339


HEXO MINI 341


OPAL LIGHT MODULE 343


DOTS LIGHT MODULE 343


ODREY 345

STUBE 353


SOLLI 355

TRACKS 1-PHASE 358 — 377


1-PHASE TRACKS 359


SARA 361


SQUBE 365


PIRRO 367


DRO 369


ODREY 371

RAY 377


HEXO 377

TRACKS 3-PHASE 378 — 389


3-PHASE TRACKS 379


SQUBE 381


CENO FORT 387

RAY 389

HEXO 389

SYSTEMS 390 — 405

ELLO SYSTEM 391

PIRRO SYSTEM 397

ILANE 401

CEILING SUSPENDED 406— 475

ROOMOR 31

MIRRO 55

DRO 71

WIRO 95

DIAMOND 97

GLOBE 107

CONE 109

J.J.W. 125

RAY 411

BOX 413

DOCUS 415

HEXO 417

SHIEK 2.0 421

SHIEK 3.0 423

SHIEK 4.0 425

WETRO 429

ODREY 437

DINOR 1.0 447

DINOR 2.0 447

DINOR 3.0 447

SOLLI 451

STUBE 453

CORK 455

CONE 457

BISHOP 459

NET 463

ELLO 465

DARF 469

GIGANT 473

RAY MULTI 411

BOX MULTI 413

DOCUS MULTI 415

HEXO MULTI 417

WETRO MULTI 429

SHIEK MULTI 421

ODREY MULTI 437

WALL RECESSED 476 — 489

RETO 479

LITO 1.0 481

LITO 2.0 481

STRIPE 483

STRANGE 485

THEMIS 487

ORIS 489

WALL SURFACE 490 — 579

ODREY 495

RAY MINI 501

RAY 503

BOX MINI 509

BOX 511

DOCUS MINI 517

HEXO MINI 519

TRACE 521

TRAIN 525

CENTRAL 527

SARA SNOOZE 529

MATCH SNOOZE 533

MICK SNOOZE 535

MICK WALL 537

LEENS 539

BENTO 541

DOMINO 543

SCAVA 545

DOT 547

FINLIN 551

CLEA 555

CLOCK 557

TAPIS 559

MILES 563

MILES 567

MILES 569

VENN 571

DARF 575

MORE ON THE NEXT PAGE

INDOOR

MIRBA IP44
577

MIRBI LONG IP44
579



ROOMOR
37



MIRRO
59



DRO
75



WIRO
111



J.J.W.
119

TABLE



ROOMOR
47



MIRRO
65

DRO
79



DRO
81



REVER
133

FLOOR SURFACE



ROOMOR
49



MIRRO
67



DRO
83



DRO
83

OUTDOOR

CEILING RECESSED

582 — 589



DEEP BIJOU IP65
585



DEEP IP65
585



TAIO IP65
587



INTRA
589

CEILING SURFACE

590 — 611



TRAM
593



TUBE
595



TAIO
597



RAY
599



TRAIN
601



TUBE CARRÉ
603



BOX
605



ROB
609



BLAS 1.0
611



BLAS 2.0
611

WALL RECESSED

612 — 621



RETO
615



ORIS
619

WALL SURFACE

622 — 667



TRAM
625



TUBE 1.0
627



TUBE 2.0
629



TAIO
631



RAY
633



TRAIN
635



CENTRAL
639



STATION
641

TUBE CARRÉ 1.0
643

BOX 1.0
649

BOX 3.0
649

BOXX
655

X-BEAM
657

RETO
659

PALOS
661

TAPE
663

SWAM
665

GETTON
667

FLOOR RECESSED

668 — 681

CARD 0.1
671

CARD 0.2
671

MAP
673

MAP ASYM
677

CHART
679

CHART ASYM
681

FLOOR SURFACE

682 — 717

STIPO
685

STAKE
687

STAKE FOLD
687

X-BEAM
689

SWAM
691

PACE
695

LINUS
697

PALOS ROUND
699

PALOS CARRÉ
701

FIFTY FIFTY
703

SWAY
705

GETTON
707

PALLUZ
709

TAPE
711

COSTA 1.0
713

COSTA 2.0
715



I'LL TAKE THE BIKE

HOMETOWN GLORY KORTRIJK

How about some fresh waffles? Grab your bike and pedal on down to Kortrijk. You can rent one on pretty much every corner in 2020's Best Bike City. Get from A to B incredibly quickly and without hurting the environment. We think it's great – and can't imagine a better place for sustainable ideas. Our lights are so much more than just an amazing design – their inner values count, too. We make sure every item limits resource use and avoids disposable packaging. Who inspires us? People like you. People who care about a clean environment as much as they care about elegant design. People who see plastic as yesterday's news.

Wie wär's mit frischen Waffeln? Dann schwingen Sie sich in Kortrijk am besten aufs Rad. Das kann man in der „Best Bike City 2020" nämlich fast an jeder Straßenecke mieten. Und sich so schnell und umweltschonend von A nach B bewegen. Tolle Sache, finden wir und können uns keinen Ort vorstellen, an dem sich nachhaltige Ideen besser umsetzen ließen. Schließlich sollen unsere Leuchten nicht nur mit außergewöhnlichem Design, sondern auch mit inneren Werten punkten. Also achten wir bei jedem Stück darauf, dass Ressourcen geschont und Einwegverpackungen vermieden werden. Von wem wir uns dabei inspirieren lassen? Von Menschen wie Ihnen, die auf edles Design ebenso viel Wert legen wie auf eine saubere Umwelt. Und für die Plastik echt von gestern ist.



WELCOME TO OUR NEW HEADQUARTERS

FROM HERE TO EVERYWHERE



A little tip before you start out: The easiest way to find our new warehouse is to head towards the four large wind turbines. They can be clearly seen from a distance in Kortrijk. It is something we are especially proud of. As basically these gentle giants supply the green energy to ensure the sustainable packaging and super-fast shipping of our products every day, to virtually any place in the world. If you also think that's a good thing, our premium showroom is just five minutes away and you can simply call in and get to know the world of Wever & Ducré on an exclusive tour. Our brand new collection is ready and waiting for you.

Kleiner Tipp vorweg: Den Weg zu unserem neuen Warehouse finden Sie am leichtesten, wenn Sie den vier großen Windrädern folgen. Die sieht man in Kortrijk nämlich schon von weitem. Und das macht uns richtig stolz. Schließlich sorgen die sanften Riesen täglich dafür, dass unsere Produkte mit nachhaltiger Energie verpackt und superschnell versandt werden. Und zwar an so ziemlich jeden Ort der Welt. Finden Sie gut? Dann kommen Sie doch einfach mal vorbei und lernen Sie die Welt von Wever & Ducré bei einer exklusiven Tour durch unseren Premium Showroom, fünf Minuten entfernt, kennen. Unsere brandneue Kollektion wartet schon auf Sie.

SHOWROOM

WEVER & DUCRÉ
Spinnerijstraat 99/21
8500 Kortrijk
Belgium
+32 56 49 28 00

OPERATIONAL SITE

WEVER & DUCRÉ
Evolis 118
8530 Harelbeke
Belgium

EXPLORE KORTRIJK
weverducre.com/kortrijk



WITH YOU, I AM HOME

AROUND THE WORLD

What makes Wever & Ducré luminaires so fantastic? Simply that they feel at home in 60 countries around the world. They shine just as comfortably in a London rooftop bar as in an ultra-modern high-rise apartment in Hong Kong. What is the secret of their success? Exceptional design and high-quality materials give each luminaire a personal appeal for everyone. Sounds perfect? Then you will be delighted to learn not just about the super-fast delivery for our products but also about the plastic-free packaging for shipping we have been using for years, even for the smallest screws. So cast an eye in the right direction and select one of the various showrooms. Our new collection is ready and waiting for you.

Das Tolle an Wever & Ducré-Leuchten? Sie sind in 60 Ländern der Welt zuhause. Und fühlen sich in der Londoner Rooftop-Bar genauso wohl wie in einem trendigen City-Apartment in Hong Kong. Ihr Erfolgsgeheimnis? Außergewöhnliches Design und hochwertige Materialien, die jede Leuchte zum ganz persönlichen Lieblingsstück machen. Klingt perfekt? Dann wird es Sie freuen, dass unsere Produkte nicht nur superschnell, sondern seit vier Jahren auch ganz ohne Plastikverpackung geliefert werden. Und das bis zur kleinsten Schraube. Also gleich einen Blick nach rechts werfen und sich einen der verschiedenen Showrooms aussuchen. Unsere neue Kollektion wartet schon auf Sie.



REPRESENTATIVE OFFICES

WEVER & DUCRÉ LUCERNE
Kellerstraße 22
6005 Lucerne
+41 41 361 60 60
Switzerland



WEVER & DUCRÉ OSLO
Drammensveien 288
0283 Oslo
+47 24 07 61 11
Norway



WEVER & DUCRÉ DUBAI
Office No. 704, HDS Business Center, Cluster M,
Jumeirah Lakes Towers, DMCC, PO Box 336603 Dubai
+971 4 436 23 47
United Arab Emirates



WEVER & DUCRÉ VIENNA
Marxergasse 1B
1030 Vienna
+43 1 526 47 84
Austria



WEVER & DUCRÉ HELSINKI
Sörnäistenkatu 1
00580 Helsinki
+358 50 506 71 82
Finland



WEVER & DUCRÉ BARCELONA
Gran vía de les Corts Catalanes 654
08010 Barcelona
+34 931 205 928
Spain



SHOWROOMS

WEVER & DUCRÉ COLOGNE
Schanzenstraße 36, Geb. 234B
51063 Cologne
+49 221 130 649 60
Germany



WEVER & DUCRÉ LONDON
23 Batemans Row
EC2A 3HH London
+44 203 174 01 77
United Kingdom



WEVER & DUCRÉ STOCKHOLM
Hårdvallsgatan 18
115 46 Stockholm
+46 73 045 76 39
Sweden



WEVER & DUCRÉ VENICE
Via Monte Popera 4/2
30027 San Donà di Piave - Venezia
+39 0421 177 83 88
Italy



WEVER & DUCRÉ LYON
36, Rue Juliette Récamier
69006 Lyon
+33 4 72 811 199
France



JOIN US VIRTUALLY
360-tour.be/Wever&Ducre/showroom/



WEVER & DUCRÉ HONG KONG
RM. 1413, Block A, Sea View Estate
2 Watson Road North Point, Hong Kong
+852 211 069 24
Hong Kong



WEVER & DUCRÉ WARSAW
Diamond Business Park, Posag 7 Panien
Street no 1, 02-495 Warsaw
+48 730 330 358
Poland



WEVER & DUCRÉ GRAZ
Gleisdorfer Gasse 15
8010 Graz
+43 316 317 085 91
Austria



WEVER & DUCRÉ PARIS
10, Rue Pecquay
75004 Paris
+33 1 402 981 01
France

THANK YOU FOR THE FLOWERS



WE LOVED TO SEE YOUR ARTWORK GROW

Jonas believes that “Inspiration can be found anywhere.” However, he prefers to look for it in small bookstores and in the hustle and bustle of cities. This is where he came up with the concept for our mural, which in 2022 will focus on the topic of “light”. “I would describe my work as an illustrative collage. A mixture of patterns, geometric shapes and naturalistic elements”, explains the artist, for whom flowers in particular have a strong, symbolic meaning: “For me, they represent aesthetics and growth. Two aspects that I was particularly concerned with in this project”. “Not least”, continues Jonas, “because I have also grown personally through self-initiated, artistic work. As a commercial illustrator, one is usually confined to a precise briefing. In this case it was completely different.” A freedom that visibly inspired the Belgian artist. And this is particularly radiated by the mural with its intense black-blue contrasts. And just to let you know: Jonas’ artwork is now officially one of Kortrijk’s new attractions, and you can view it personally right in our new foyer.

„Inspiration lässt sich überall finden“, sagt Jonas, der am liebsten in kleinen Buchläden und aufregenden Städten nach ihr sucht. Hierbei kam ihm auch die Idee zu unserem Mural, bei dem 2022 das Thema „Licht“ im Zentrum steht. „Ich würde mein Werk als illustrative Collage bezeichnen. Eine Mischung aus Mustern, geometrischen Formen und naturalistischen Elementen“, erklärt der Künstler, für den vor allem Blumen eine starke, symbolische Bedeutung haben: „Für mich stehen sie für Ästhetik und Wachstum. Zwei Dinge, die mich bei diesem Projekt besonders beschäftigt haben“. „Vor allem“, so Jonas weiter, „weil ich durch das freie, künstlerische Arbeiten auch persönlich gewachsen bin. Als Werbeillustrator ist man ja meist an genaue Briefings gebunden. Hier war das etwas vollkommen anderes.“ Eine Freiheit, die den Belgier sichtlich beflügelt hat. Und das Mural mit seinen intensiven Schwarz-Blau-Kontrasten ganz besonders strahlen lässt. Übrigens: Bewundern kann man Jonas’ Kunstwerk direkt in unserem neuen Foyer, das jetzt ganz offiziell zu Kortrijks neuen Sehenswürdigkeiten zählt.



„I enjoy combining different influences and see where it leads me.“

JONAS DEVACHT



LESS IS MORE

WHY IT'S OKAY TO SKIP SOME PAGES

weverducre.com/lessismore



5 YEAR GUARANTEE*

20 YEARS LED REPLACEABILITY

SUSTAINABLE BY DESIGN

WE ARE COMMITTED

We don't merely develop our products to comply with the standards of the Ecodesign Directive, we go one step further and ensure the simplest and best possible long-term replaceability of the components: You can rely on the availability of appropriate replacements for LED engines for 20 years. The basis for longevity is a consistent quality standard right from the start, which is why we give a 5-year guarantee on our products. But it is not just our products themselves that are durable, our choice of materials and paints is also geared towards sustainability. In collaboration with the COLORNETWORK® we develop products in "Sustained Colors". These are products which are characterized by long-term validity and versatility.

Wir entwickeln unsere Produkte nicht nur nach den Standards der Ökodesign-Richtlinie, wir gehen noch einen Schritt weiter und stellen eine möglichst einfache und langfristige Austauschbarkeit von Komponenten sicher: Auf die Verfügbarkeit passenden Ersatzes für LED-Engines können Sie sich für 20 Jahre lang verlassen. Grundlage für Langlebigkeit ist ein konsequenter Qualitätsanspruch von Anfang an, weshalb wir für unsere Produkte 5 Jahre Garantie gewähren. Aber nicht nur unsere Produkte sind langlebig, auch unsere Material- und Farbwahl ist auf Nachhaltigkeit ausgerichtet. In Zusammenarbeit mit dem COLORNETWORK® entwickeln wir Produkte in „Sustained Colors". Hierbei handelt es sich um Produkte, die sich sich durch Langzeitgültigkeit und Kombinationsfreude auszeichnen.

COLOR NET WORK®

*The conditions of guarantee available to view at weverducre.com apply
*Es gelten die auf weverducre.com verfügbaren Garantiebedingungen

"A Sustained Color is characterised by long-term validity and versatility."

OLIVER MÄRSCH
SALES DIRECTOR WEVER & DUCRÉ
MEMBER OF COLORNETWORK®



weverducre.com/sustainability



NOW I'M ALL YOURS

IT'S ALL-SYSTEMS-GO IN 48 HOURS

Well, that's the thing about crushes. Once you've set your heart on a light, of course you want it straightaway. The good news is that our super-fast delivery service makes this easy. 90% of our collection is shipped straight from our Kortrijk warehouse. No more endless waiting. And, of course, no plastic packaging. At all. Want to know for sure? Then simply check your crush's availability online. You can already start chilling the champagne.

Tja, so ist das mit dem Product Crush: Hat man sich erst mal in eine Leuchte verliebt, will man sie natürlich sofort bei sich haben. Die gute Nachricht: Mit unserem superschnellen Lieferservice ist das kein Problem. Denn 90% der Kollektion kann direkt von unserem Warehouse in Kortrijk aus versandt werden. Ohne lange Wartezeiten. Und natürlich ganz ohne Plastikverpackung. Sie möchten's genau wissen? Dann checken Sie die Verfügbarkeit Ihres Lieblings doch einfach online. Den Champagner können Sie in der Zwischenzeit ja schon mal kaltstellen.



"I'm always fast. Just like our delivery service."

YVES MARGINET
AREA SALES MANAGER

IN
DOOR

DESIGNER FAMILIES

p. 24 — 133

ROOMOR
3H DRAFT



ROOMOR CABLE SUSPENDED
27



ROOMOR OFFICE CABLE SUSPENDED
31



ROOMOR OFFICE CEILING SURFACE
33



ROOMOR OFFICE ON TRACK
35



ROOMOR WALL 1.0
37



ROOMOR WALL
45



ROOMOR TABLE 1.0
47



ROOMOR FLOOR
49

MIRRO
13&9 DESIGN



MIRRO CEILING
53



MIRRO SUSPENDED
55



MIRRO WALL
59



MIRRO TABLE
65



MIRRO FLOOR
67

DRO
13&9 DESIGN

DRO CEILING
69



DRO SUSPENDED
71



DRO WALL
75

DRO TABLE | FLOOR
79



DRO FLOOR
83

WIRO
BERND STEINHUBER



WIRO SUSPENSION SYSTEMS
86



WIRO SUSPENDED
91



WIRO SUSPENDED
93



WIRO SUSPENDED
95



WIRO DIAMOND
97



WIRO GLOBE
105



WIRO CONE
109



WIRO WALL
111



WIRO CEILING
113

J.J.W.
JULES WABBES



J.J.W. WALL
117



J.J.W. WALL
119



J.J.W. CEILING
123



J.J.W. SUSPENDED
125



J.J.W. SUSPENDED
127

REVER
MARCELLO ZILIANI



REVER DINING
133





ROOMOR

CABLE SUSPENDED

reddot award 2019
winner lighting design



1.1 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.80kg

	CODE
2.5m	248120GG1
2.5m	248120BK1
2.5m	248120BB1
6m	248220GG1
6m	248220BK1
6m	248220BB1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 732



1.1 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 0.84kg

	CODE
2.5m	2481E0GG1
2.5m	2481E0BK1
2.5m	2481E0BB1
6m	2482E0GG1
6m	2482E0BK1
6m	2482E0BB1

OPTIONAL

A60 9W | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more lamps and specs on page 732



1.2 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | grey felt

IP20 1.07kg|0.89kg

	CODE
2.5m	248120BF2
2.5m	248120BK2
2.5m	248120BB2
6m	248220BF2
6m	248220BK2
6m	248220BB2

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 732



1.2 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium wet painted | grey felt

IP20 1.11kg|0.94kg

	CODE
2.5m	2481E0BF2
2.5m	2481E0BK2
2.5m	2481E0BB2
6m	2482E0BF2
6m	2482E0BK2
6m	2482E0BB2

OPTIONAL

A60 9W | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more lamps and specs on page 732

COTTON FACTORY | COTTON KITCHEN | BUREAU GODDEERIS ARCHITECTEN KORTRIJK | BELGIUM



ADESA | MARKEY & SCHELSTRAETE TIENEN | BELGIUM

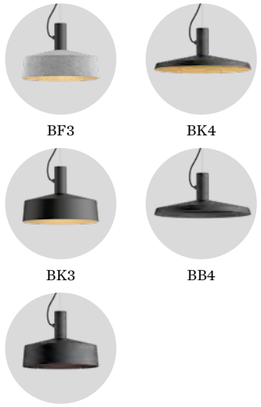

BF3 BK4 BK3 BB4 BB3

ROOMOR

CABLE SUSPENDED

reddot award 2019
winner lighting design





1.3 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | grey felt

IP20 1.56kg|1.44kg

	CODE
2.5m	248120BF3
2.5m	248120BK3
2.5m	248120BB3
6m	248220BF3
6m	248220BK3
6m	248220BB3

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 732



1.3 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium wet painted | grey felt

IP20 1.60kg|1.48kg

	CODE
2.5m	2481E0BF3
2.5m	2481E0BK3
2.5m	2481E0BB3
6m	2482E0BF3
6m	2482E0BK3
6m	2482E0BB3

OPTIONAL

A60 9W | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more lamps and specs on page 732



1.4 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 1.68kg

	CODE
2.5m	248120BK4
2.5m	248120BB4
6m	248220BK4
6m	248220BB4

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 732



1.4 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 1.72kg

	CODE
2.5m	2481E0BK4
2.5m	2481E0BB4
6m	2482E0BK4
6m	2482E0BB4

OPTIONAL

A60 9W | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more lamps and specs on page 732





ROOMOR OFFICE

CABLE SUSPENDED

reddot winner 2021

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design





1.0 MICROPRISMATIC

LED PCB 36W | DALI push dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
microprismatic PMMA cover

IP20 SDCM3 L80|60K UGR ≤ 19/65° 4.62kg

3000K | CRI >90 | 3640lm

	CODE
	1681M5W5
	1681M5B5

4000K | CRI >90 | 3640lm

	CODE
	1681M5W7
	1681M5B7

1.0 OPAL

LED PCB 36W | DALI push dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
opal PMMA cover

IP20 SDCM3 L80|60K 4.62kg

3000K | CRI >90 | 3590lm

	CODE
	168185W5
	168185B5

4000K | CRI >90 | 3590lm

	CODE
	168185W7
	168185B7



UGR ≤ 19/65°
≤3000cd/m²
microprismatic



URBAN SPACES | STUDIO KOMO STUTTGART | GERMANY

ROOMOR OFFICE

CEILING SURFACE

reddot winner 2021

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design







1.0 MICROPRISMATIC

LED PCB 36W | DALI push dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
microprismatic PMMA cover

IP20 SDCM3 L80|60K UGR ≤ 19/65° 4.22kg

3000K | CRI >90 | 3640lm

	CODE
	1683M5W5
	1683M5B5

4000K | CRI >90 | 3640lm

	CODE
	1683M5W7
	1683M5B7

1.0 OPAL

LED PCB 36W | DALI push dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
opal PMMA cover

IP20 SDCM3 L80|60K 4.22kg

3000K | CRI >90 | 3590lm

	CODE
	168385W5
	168385B5

4000K | CRI >90 | 3590lm

	CODE
	168385W7
	168385B7



UGR ≤ 19/65°
≤3000cd/m²
microprismatic



DIN SONNBERG IM MÜHLKREIS | AUSTRIA

ROOMOR OFFICE on track

3-PHASE







1.0 MICROPRISMATIC

LED PCB 36W | DALI dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
microprismatic PMMA cover
3-phase track adapter

IP20 SDCM3 L80|60K UGR ≤ 19/65° 4.43kg

3000K | CRI >90 | 3640lm

	CODE
	1684M5W5
	1684M5B5

4000K | CRI >90 | 3640lm

	CODE
	1684M5W7
	1684M5B7

1.0 OPAL

LED PCB 36W | DALI dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
opal PMMA cover
3-phase track adapter

IP20 SDCM3 L80|60K 4.43kg

3000K | CRI >90 | 3590lm

	CODE
	168485W5
	168485B5

4000K | CRI >90 | 3590lm

	CODE
	168485W7
	168485B7

UGR ≤ 19/65°
≤3000cd/m²
microprismatic



ZENTRUMLAB LA GARINGA | SPAIN

ROOMOR

WALL SURFACE

reddot award 2019
winner lighting design





1.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted

IP20 0°-45° 0.99kg



BK1



BB1

	CODE
	338120BK1
	338120BB1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 731





KVÄNUM KITCHEN | KVÄNUM DESIGN STUDIO | ANKER & CO COPENHAGEN | DENMARK

back



HOTEL ROTTERDAM | NETHERLANDS

ROOMOR

WALL SURFACE

reddot award 2019
winner lighting design



BK1



BB1



3.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
cable plug with hand switch

IP20 0°-45°|0°-30° 1.36kg

	CODE
	339120BK1
	339120BB1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 731



3.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
cable base round

IP20 0°-45°|0°-30° 1.29kg

	CODE
	339220BK1
	339220BB1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 731



HOTEL ROTTERDAM | NETHERLANDS

back





BF2



BK3



BB4

ROOMOR

WALL SURFACE

reddot award 2019
winner lighting design

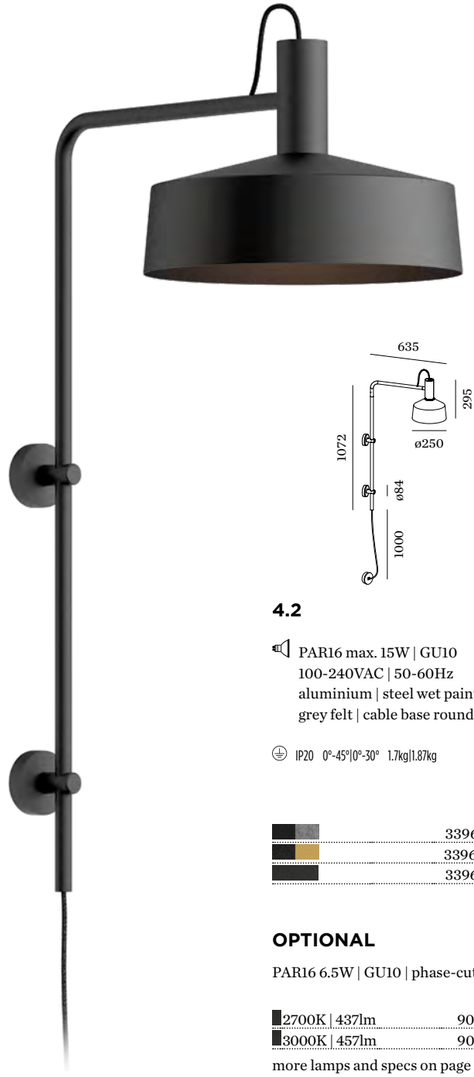

4.2

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
grey felt | cable base round

IP20 0°-45°|0°-30° 1.7kg|1.87kg

	CODE
	339620BF2
	339620BK2
	339620BB2

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 731



4.3

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
grey felt | cable base round

IP20 0°-45°|0°-30° 2.24kg|2.37kg

	CODE
	339620BF3
	339620BK3
	339620BB3

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 731



4.4

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
cable base round

IP20 0°-45°|0°-30° 2.48kg

	CODE
	339620BK4
	339620BB4

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 731



HOTEL ROTTERDAM | NETHERLANDS



3H DRAFT



GG1



RR1



BK1



BB1

back

ROOMOR

TABLE

reddot award 2019
winner lighting design



1.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
cable plug with hand switch

IP20 0°-45°|0°-30° 2.35kg

	CODE
	637120GG1
	637120RR1
	637120BK1
	637120BB1

OPTIONAL

PAR16 6.5W | GU10

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731



PRIVATE RESIDENCE | MARKEY & SCHELSTRAETE BELGIUM

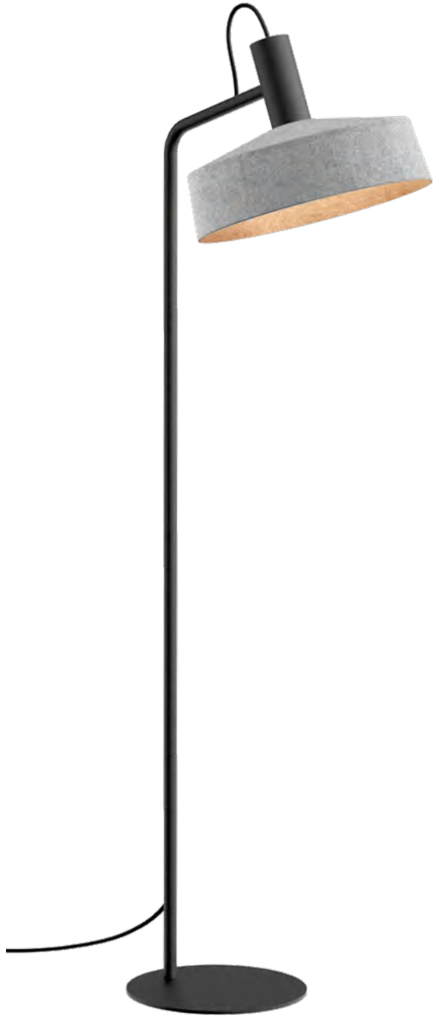

3H DRAFT

ROOMOR

FLOOR SURFACE

reddot award 2019
winner lighting design



1.2

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
grey felt | cable with floor switch

IP20 0°-45°|0°-30° 6.05kg

	CODE
	638120BF2
	638120BK2
	638120BB2

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 731



1.3

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel wet painted
grey felt | cable with floor switch

IP20 0°-45°|0°-30° 6.54kg

	CODE
	638120BF3
	638120BK3
	638120BB3

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more lamps and specs on page 731



DESIGNER

“We want to instill soul, to imbue products with emotional added value.”

ANASTASIJA & MARTIN LESJAK, 13&9 DESIGN

At Studio 13&9, Anastasija and Martin Lesjak focus entirely on “transferring the creative energy of a brand to the product”. This approach is also reflected in all the collections that the Austrian designer team has designed exclusively for Wever & Ducré. DRO stands out in particular, where the designer duo has been able to take the fleeting beauty of a dewdrop and capture it permanently. As Anastasija explains: “In creating this luminaire, we have had to first delve deeply into the so-called hydrophobic effect. This causes water to cling to, or roll off a surface, thus creating clinging or stationary shapes in the process: an aesthetic that we found particularly attractive.” But the source of inspiration for 13&9 does not just come from nature, but many other creative areas, like the arts, fashion and architecture. It is a transdisciplinary approach, which is expressed in a particularly attractive manner in the MIRRO collection, designed together with the designer Sabrina Stadlober. The metallic, reflective surface of the luminaires allows both the viewer and the surroundings to be reflected at the same time. An artisan’s device, used in this instance by 13&9, to closely connect the user with the product. And it is just such details, in the pieces designed by 13&9, that draw the fascination of everyone.

Anastasija und Martin Lesjak vom Studio 13&9 konzentrieren sich ganz darauf, „die kreative Energie einer Marke auf das Produkt zu übertragen“. Dieser Ansatz spiegelt sich auch in allen Kollektionen wider, die das österreichische Designerteam exklusiv für Wever & Ducré entworfen hat. Allen voran: DRO, mit der es den beiden Designern gelungen ist, die flüchtige Schönheit eines Tautropfens dauerhaft einzufangen. „Für diese Leuchte haben wir uns intensiv mit dem sogenannten hydrophoben Effekt auseinandergesetzt.“, erklärt Anastasija. „Er bewirkt, dass Wasser abperlt oder anhaftet, und lässt dadurch sich anschmiegende oder stehende Formen entstehen. Eine Ästhetik, die uns besonders beeindruckt hat.“ Inspirieren lassen sich 13&9 aber nicht nur von der Natur, sondern auch von vielen anderen Kreativbereichen wie Kunst, Mode oder Architektur. Eine transdisziplinäre Herangehensweise, die bei der mit Designerin Sabrina Stadlober entworfenen Kollektion MIRRO besonders schön zum Ausdruck kommt. Gleichzeitig können sich Betrachter und Umgebung in der metallischreflektierenden Oberfläche der Leuchten spiegeln. Ein gekonnter Kunstgriff, mit dem 13&9 eine intensive Verbindung zwischen Benutzer und Produkt herstellen. Und genau das ist es auch, was die besondere Faszination aller von 13&9 entworfenen Objekte ausmacht.

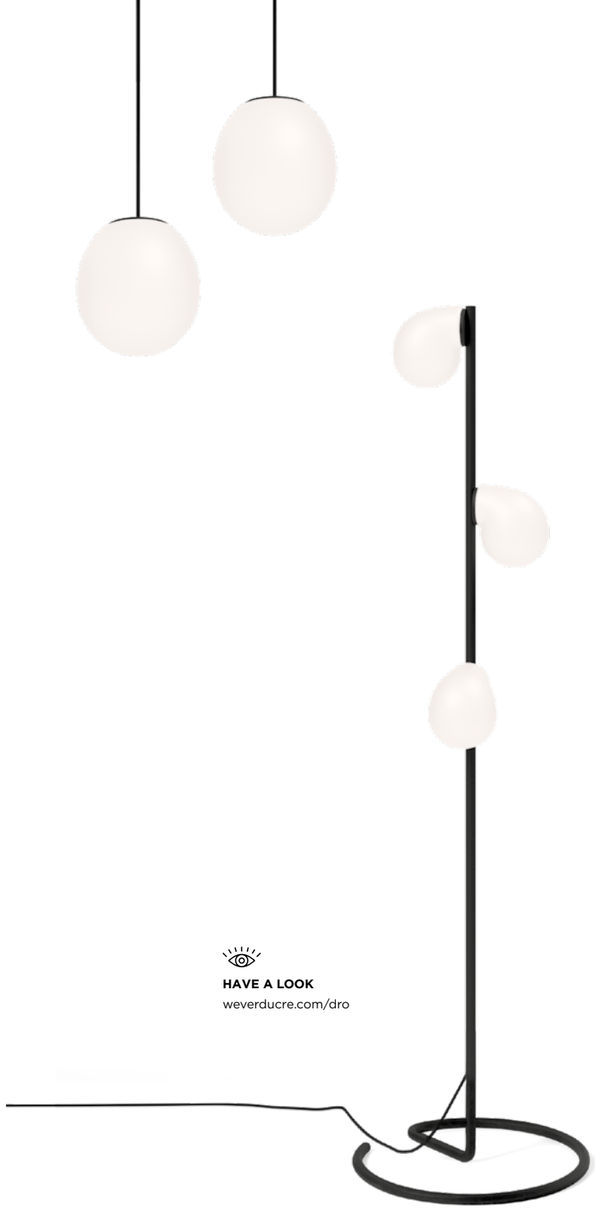

HAVE A LOOK
weverducre.com/dro



MORE INFO
weverducre.com/mirro





HOTEL SAN GIACOMO | ALESSANDRO CESTELE BRENTONICO | ITALY

MIRRO

CEILING SURFACE

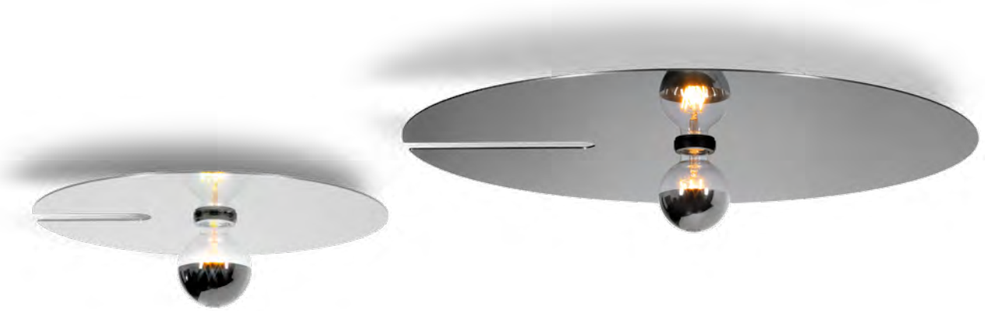







1.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 0.70kg

	CODE
	6321E0GB0
	6321E0NB0
	6321E0LB0

OPTIONAL

A60 6W/5W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 400lm	9003E155
2700K | 495lm	9003E139

A60 5.1W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 418lm	9003E140

2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 1.00kg

	CODE
	6322E0GB0
	6322E0NB0
	6322E0LB0

OPTIONAL

G95 5.6W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 377lm	9003E156
2700K | 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 464lm	9003E157

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 2.10kg

	CODE
	6323E0GB0
	6323E0NB0
	6323E0LB0

OPTIONAL

G95 5.6W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 377lm	9003E156
2700K | 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 464lm	9003E157



FURNITURE STORE KOBALT BRUGGE | BELGIUM



MIRRO

CEILING SUSPENDED







1.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 0.70kg

	CODE
2.5m	6341E0GB0
2.5m	6341E0NB0
2.5m	6341E0LB0
6m	6344E0GB0
6m	6344E0NB0
6m	6344E0LB0

OPTIONAL

A60 6W/5W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 400lm	9003E155
2700K | 500lm	9003E139

A60 6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 500lm	9003E140

2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 1.00kg

	CODE
2.5m	6342E0GB0
2.5m	6342E0NB0
2.5m	6342E0LB0
6m	6345E0GB0
6m	6345E0NB0
6m	6345E0LB0

OPTIONAL

G95 5.6W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 377lm	9003E156
2700K | 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 464lm	9003E157

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 2.10kg

	CODE
2.5m	6343E0GB0
2.5m	6343E0NB0
2.5m	6343E0LB0
6m	6346E0GB0
6m	6346E0NB0
6m	6346E0LB0

OPTIONAL

G95 5.6W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 377lm	9003E156
2700K | 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 464lm	9003E157



MIRRO

WALL SURFACE

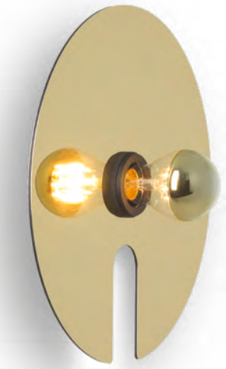







1.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 0.70kg

	CODE
	6321E0GB0
	6321E0NB0
	6321E0LB0

OPTIONAL

A60 6W/5W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 400lm	9003E155
2700K | 500lm	9003E139

A60 6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 500lm	9003E140

2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 1.00kg

	CODE
	6322E0GB0
	6322E0NB0
	6322E0LB0

OPTIONAL

G95 5.6W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 377lm	9003E156
2700K | 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 464lm	9003E157

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium powder coated
one side reflective composite panel

IP20 2.10kg

	CODE
	6323E0GB0
	6323E0NB0
	6323E0LB0

OPTIONAL

G95 5.6W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 377lm	9003E156
2700K | 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 464lm	9003E157

RESTAURANT TRIANGOLO | NANCY COOL CONIX RDBM ARCHITECTS EDEGEM | BELGIUM

13&9 DESIGN

back





MIRRO

WALL SURFACE



1.0 EXTENDED

A60 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
one side reflective composite panel
cable plug with dimmer switch

IP20 0°-35° 0.92kg

	CODE
	6331E0GB0
	6331E0NB0
	6331E0LB0

OPTIONAL

A60 6W/5W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 400lm	9003E155
2700K | 500lm	9003E139

A60 6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 500lm	9003E140



2.0 EXTENDED

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
one side reflective composite panel
cable plug with dimmer switch

IP20 0°-35° 1.25kg

	CODE
	6332E0GB0
	6332E0NB0
	6332E0LB0

OPTIONAL

G95 5.6W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 377lm	9003E156
2700K | 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 464lm	9003E157



HOTEL NEW YORK | USA

▶ **DESIGN WITH LOVE**





MIRRO

TABLE



HOTEL NEW YORK | USA

13&9 DESIGN



back



1.0

A60 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
one side reflective composite panel
cable plug with dimmer switch

IP20 1.30kg

	CODE
	6301E0GB0
	6301E0NB0
	6301E0LB0

OPTIONAL

A60 6W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 400lm	9003E155
2700K | 500lm	9003E139

A60 6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 500lm	9003E140



PRIVATE RESIDENCE BELGIUM

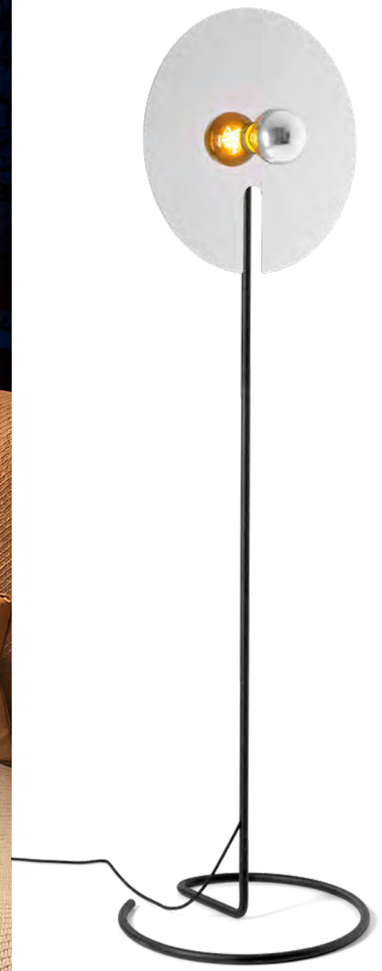

13&9 DESIGN

MIRRO

FLOOR SURFACE



2.0

G95 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
one side reflective composite panel
cable plug with dimmer switch

IP20 3.30kg

	CODE
	6311E0GB0
	6311E0NB0
	6311E0LB0

OPTIONAL

G95 5.6W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 377lm	9003E156
2700K | 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 464lm	9003E157



3.0

G95 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
one side reflective composite panel
cable plug with dimmer switch

IP20 3.70kg

	CODE
	6312E0GB0
	6312E0NB0
	6312E0LB0

OPTIONAL

G95 5.6W | E27 | phase-cut dim
gold mirror

	CODE
2200K | 377lm	9003E156
2700K | 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K | 464lm	9003E157



PRIVATE RESIDENCE NETHERLANDS

DRO

CEILING SURFACE





369







1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP20 0.32kg

	CODE
	1721G0WB0
	1721G0YB0

2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP20 0.89kg

	CODE
	1722C0WB0
	1722C0YB0

3.0

A60 max. 12W | E27
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP20 1.96kg

	CODE
	1723E0WB0
	1723E0YB0



brown on



brown off

OPTIONAL

QT14 3.5W | G9 | phase-cut dim

	CODE
3000K | 250lm	9010G804

more lamps and specs on page 732

OPTIONAL

C35 5.5W | E14 | phase-cut dim

	CODE
2700K | 450lm	9003C103

more lamps and specs on page 732

OPTIONAL

A60 9W | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more lamps and specs on page 732

13&9 DESIGN

back

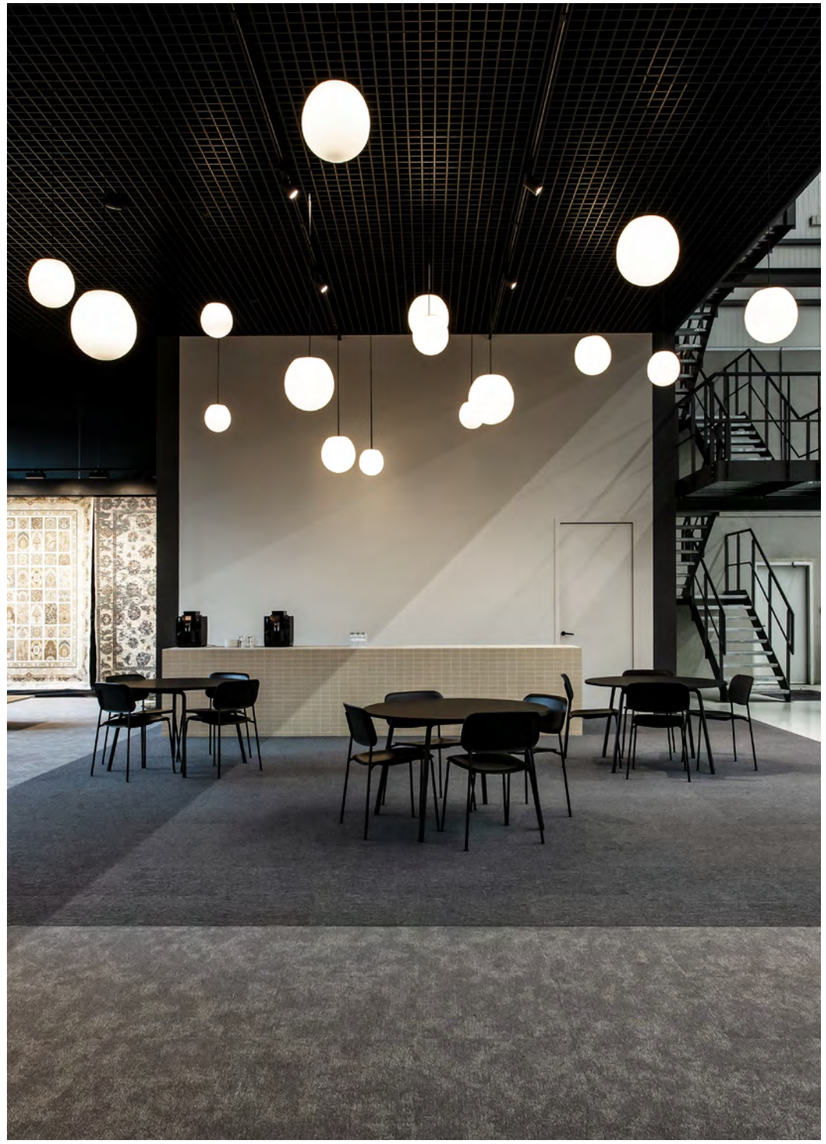

SHOWROOM VANDEWIELE | 5 AM MARKE | BELGIUM



brown on



brown off



1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP20 0.50kg

	CODE
	2521G0WB0
	2521G0YB0

OPTIONAL

QT14 3.5W | G9 | phase-cut dim

	CODE
3000K | 250lm	9010G804

more lamps and specs on page 732



2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP20 1.07kg

	CODE
	2522C0WB0
	2522C0YB0

OPTIONAL

C35 5.5W | E14 | phase-cut dim

	CODE
2700K | 450lm	9003C103

more lamps and specs on page 732



3.0

A60 max. 12W | E27
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass

IP20 2.20kg

	CODE
	2523E0WB0
	2523E0YB0

OPTIONAL

A60 9W | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more lamps and specs on page 732



4.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass

IP20 3.25kg

	CODE
	2524E0WB0
	2524E0YB0

OPTIONAL

A65 14.6W | E27 | phase-cut dim

	CODE
2700K | 1378lm	9003E153

more lamps and specs on page 732



OFFICE AUSY | ZAFA INTERIEURSTUDIO | GWENDY HERREMANS GENT | BELGIUM



OFFICE EDGAR & COOPER | BUREAU GODDEERIS ARCHITECTEN KORTRIJK | BELGIUM



PRIVATE RESIDENCE SWITZERLAND

DRO

WALL SURFACE







1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP44 0.60kg

	CODE
	3431G0W0
	3431G0Y0

2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass

IP44 1.03kg

	CODE
	3432C0W0
	3432C0Y0

1.0 COMP

3x QT14 max. 5W | G9 | dimmable
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 0°-35° 3.06kg

	CODE
	3441G0WB0
	3441G0YB0



brown on



brown off

OPTIONAL

QT14 3.5W | G9 | phase-cut dim

	CODE
3000K | 250lm	9010G804

more lamps and specs on page 732

OPTIONAL

C35 5.5W | E14 | phase-cut dim

	CODE
2700K | 450lm	9003C103

more lamps and specs on page 732

OPTIONAL

QT14 3.5W | G9 | phase-cut dim

	CODE
3000K | 250lm	9010G804

more lamps and specs on page 732







MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS | L'OBSERVATOIRE DE LA NUIT VINEUIL-SAINT-FIRMIN | FRANCE



brown on



brown off

DRO

TABLE | FLOOR SURFACE



1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass
cable plug with switch

IP20 0.41kg

	CODE
	6421G0WB0
	6421G0YB0

OPTIONAL

QT14 3.5W | G9

	CODE
3000K | 250lm	9010G804

more lamps and specs on page 732



2.0

C35 max. 6W | E14 | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 0.97kg

	CODE
	6422C0WB0
	6422C0YB0

OPTIONAL

C35 5.5W | E14 | phase-cut dim

	CODE
2700K | 450lm	9003C103

more lamps and specs on page 732



3.0

A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 1.97kg

	CODE
	6423E0WB0
	6423E0YB0

OPTIONAL

A60 9W | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more lamps and specs on page 732

13&9 DESIGN

back



PRIVATE RESIDENCE NETHERLANDS



brown on

brown off

13&9 DESIGN



2.0

C35 max. 6W| E14 | dimmable
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 2.70kg

	CODE
	6432C0WB0
	6432C0YB0

OPTIONAL

C35 5.5W | E14 | phase-cut dim

	CODE
2700K | 450lm	9003C103

more lamps and specs on page 732



3.0

A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 3.80kg

	CODE
	6433E0WB0
	6433E0YB0

OPTIONAL

A60 9W | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more lamps and specs on page 732

back



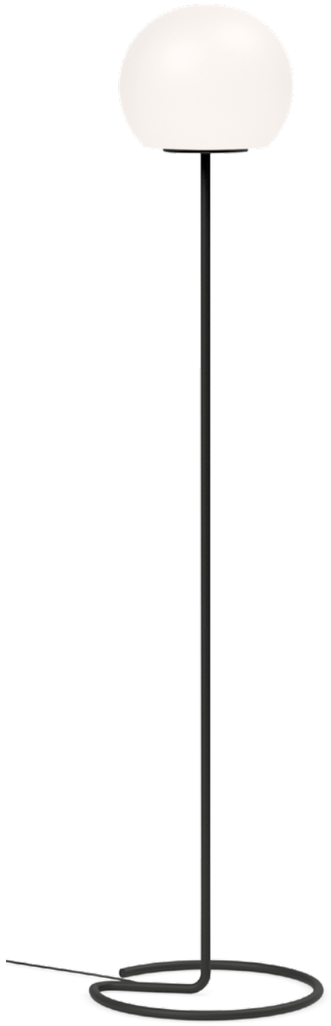



brown on



brown off

DRO

FLOOR SURFACE



3.0

A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 8.25kg

	CODE
	6442E0WB0
	6442E0YB0

OPTIONAL

A60 9W | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more lamps and specs on page 732



1.0 COMP

3x QT14 max. 5W | G9 | dimmable
220-240VAC | 50-60Hz
aluminium steel powder coated
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 6.80kg

	CODE
	6443G0WB0
	6443G0YB0

OPTIONAL

QT14 3.5W | G9 | phase-cut dim

	CODE
3000K | 250lm	9010G804

more lamps and specs on page 732



WIRO DIAMOND



WIRO GLOBE

WIRO

HAVE A LOOK
weverducre.com/wiro-configurator

DESIGNER

“A design is good if it brings something new and timeless to the world.”

BERND STEINHUBER



And with WIRO, Bernd Steinhuber has accomplished exactly that. What is the greatest inspiration of this Austrian designer born in 1972? Simply put: Everything. That’s why his little sketchbook is his constant companion. “Ideas are fleeting,” he says, “and they don’t stick to office hours.” That’s an attitude we truly admire. After all, the most beautiful things are often found when you are not looking for them. So keep your eyes open.

Und das ist Bernd Steinhuber mit der WIRO auf jeden Fall gelungen. Wovon sich der 1972 geborene Designer am liebsten inspirieren lässt? Von allem, was ihm begegnet. Darum ist sein kleines Skizzenbuch auch sein steter Begleiter. „Ideen sind flüchtig und halten sich nicht an Bürozeiten.“ Eine Einstellung, die uns gut gefällt. Denn die schönsten Dinge findet man bekanntlich meist dann, wenn man nicht nach ihnen sucht. Also: Keep your eyes open.

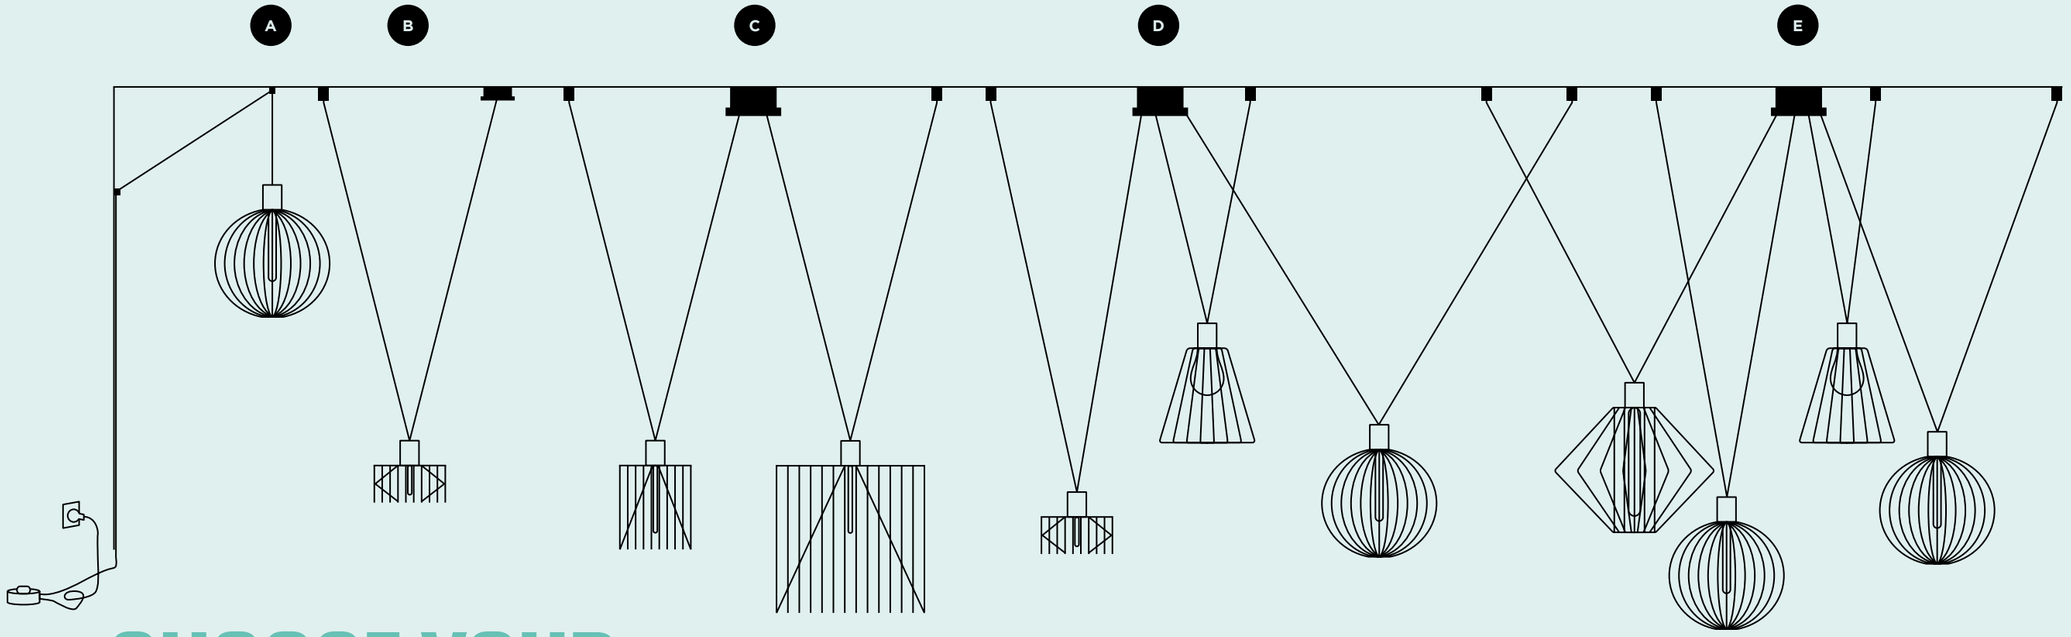

CHOOSE YOUR DECENTER













2.0 WIRO

	CODE
	209600B0

1.8 WIRO

	CODE
	209200V0
	209200B0

3.8 WIRO

	CODE
	209300V0
	209300B0

1.1 DIAMOND

	CODE
	244100P0
	244100B0

4.0 GLOBE

	CODE
	243100B0

1.0 CONE

	CODE
	245100V0
	245100B0

BERND STEINHUBER

back

A

CABLE PLUG AND PLAY

E27 LED 4-25W | connector set for one shade | black textile cable | incl. cable plug with dimmer | 2 cable brackets included

	CODE
8.5m	90015165

B

DECENTER SET 1.0

A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 1 shade
round ceiling base | black textile cable
1 base + 1 end stop included

	CODE
2.6m	90052050
6m	90052051

C

DECENTER SET 2.0

2x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 2 shades
round ceiling base | black textile cable
1 multibase + 2 end stops included

	CODE
2.6m	90052055
6m	90052056

D

DECENTER SET 3.0

3x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 3 shades
round ceiling base | black textile cable
1 multibase + 3 end stops included

	CODE
2.6m	90052060
6m	90052063

E

DECENTER SET 4.0

4x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 4 shades
round ceiling base | black textile cable
1 multibase + 4 end stops included

	CODE
2.6m	90052067
6m	90052078



GADY LEBRING | AUSTRIA



EMMA THE SLEEP COMPANY | VRAI INTERIOR ARCHITECTURE FRANKFURT AM MAIN | GERMANY

WIRO

CEILING SUSPENDED





1.8 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

IP20 1.7kg

		CODE
	2.6m	2092E0V0
	2.6m	2092E0B0
	6m	2090E0V0
	6m	2090E0B0

more suspension options on page 86

OPTIONAL

A60 3.8W/5.3W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 602lm	9003E138

T30-225 5.4W | E27 | phase-cut dim

	CODE
2200K | 428lm	9003E129
2700K | 506lm	9003E136

more lamps and specs on page 732



3.8 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

IP20 2.75kg

		CODE
	2.6m	2093E0V0
	2.6m	2093E0B0
	6m	2097E0V0
	6m	2097E0B0

more suspension options on page 86

OPTIONAL

A60 3.8W/5.3W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 602lm	9003E138

T30-225 5.4W | E27 | phase-cut dim

	CODE
2200K | 428lm	9003E129
2700K | 506lm	9003E136

more lamps and specs on page 732



rust
V



black
B

▶ **DESIGN WITH LOVE**

BERND STEINHUBER

back



RESTAURANT DE DRIE FONTEINEN | TAILORMATE IN COOPERATION WITH ALKEN MAES VILVOORDE | BELGIUM

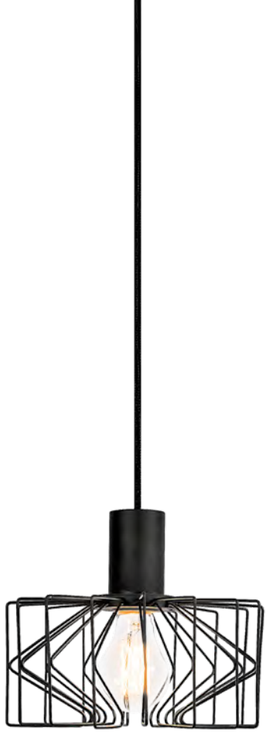

BERND STEINHUBER

back

WIRO

CEILING SUSPENDED



2.0 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 0.82kg

	CODE
2.6m	2096E0B0
6m	2091E0B0

more suspension options on page 86

OPTIONAL

A60 6W | E27 | phase-cut dim

	CODE
2200K | 315lm	9003E109
2700K | 500lm	9003E138

more lamps and specs on page 732



RESTAURANT MARCHÉ 17 TURNHOUT | BELGIUM

WIRO

CEILING SUSPENDED



6.1 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

IP20 3.22kg

	CODE
2.6m	2094E0V0
2.6m	2094E0B0
6m	2098E0V0
6m	2098E0B0

OPTIONAL

A60 3.8W/5.3W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 602lm	9003E138

T30-300 6.8W/7W | E27
phase-cut dim

	CODE
2200K | 582lm	9003E130
2700K | 632lm	9003E135

more lamps and specs on page 732



6.5 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

IP20 4.42kg

	CODE
2.6m	2095E0V0
2.6m	2095E0B0
6m	2099E0V0
6m	2099E0B0

OPTIONAL

A60 3.8W/5.3W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 602lm	9003E138

T30-300 6.8W/7W | E27
phase-cut dim

	CODE
2200K | 582lm	9003E130
2700K | 632lm	9003E135

more lamps and specs on page 732



rust
V



black
B

BERND STEINHUBER

back



WIRO

CEILING SUSPENDED

GOOD DESIGN

As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



1.0 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 3.52kg

	CODE
2.6m	2291E0P0
2.6m	2291E0B0
6m	2296E0P0
6m	2296E0B0



1.1 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 2.72kg

	CODE
2.6m	2441E0P0
2.6m	2441E0B0
6m	2442E0P0
6m	2442E0B0

more suspension options on page 86



copper
P



black
B

OPTIONAL

T30-300 6.8W/7W | E27
phase-cut dim

	CODE
2200K | 582lm	9003E130
2700K | 632lm	9003E135

more lamps and specs on page 732

OPTIONAL

T30-300 6.8W/7W | E27
phase-cut dim

	CODE
2200K | 582lm	9003E130
2700K | 632lm	9003E135

more lamps and specs on page 732





THINK URBAN | DEGRAER INTERIEURARCHITECTEN KORTRIJK | BELGIUM

back



DIN LINZ | AUSTRIA

WIRO

CEILING SUSPENDED

GOOD DESIGN

As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



2.0 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 5.62kg

	CODE
2.6m	2292E0P0
2.6m	2292E0B0
6m	2297E0P0
6m	2297E0B0

OPTIONAL

T30-300 6.8W/7W | E27
phase-cut dim

	CODE
2200K | 582lm	9003E130
2700K | 632lm	9003E135

more lamps and specs on page 732



3.0 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 7.02kg

	CODE
2.6m	2293E0P0
2.6m	2293E0B0
6m	2298E0P0
6m	2298E0B0

OPTIONAL

T30-300 6.8W/7W | E27
phase-cut dim

	CODE
2200K | 582lm	9003E130
2700K | 632lm	9003E135

more lamps and specs on page 732

copper
P

black
B

BERND STEINHUBER

back



RESTAURANT ENSO SUSHI & GRILL | DITTEL ARCHITEKTEN GMBH STUTTGART | GERMANY



SHOWROOM | GRANDO KEUKENS SINT-MARTENS-LATEM | BELGIUM

BERND STEINHUBER

WIRO

CEILING SUSPENDED



1.0 GLOBE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 5.92kg

	CODE
2.6m	2281E0B0
6m	2284E0B0

OPTIONAL

A60 3.8W/5.3W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 602lm	9003E138

T30-300 6.8W/7W | E27
phase-cut dim

	CODE
2200K | 582lm	9003E130
2700K | 632lm	9003E135

more lamps and specs on page 732



2.0 GLOBE

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 4.42kg

	CODE
2.6m	2282E0B0
6m	2285E0B0

OPTIONAL

A60 3.8W/5.3W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 602lm	9003E138

T30-300 6.8W/7W | E27
phase-cut dim

	CODE
2200K | 582lm	9003E130
2700K | 632lm	9003E135

more lamps and specs on page 732



SHOWROOM | GRANDO KEUKENS BRUGGE | BELGIUM

BERND STEINHUBER

WIRO

CEILING SUSPENDED



4.0 GLOBE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 1.92kg

	CODE
2.6m	2431E0B0
6m	2434E0B0

more suspension options on page 86

OPTIONAL

T30-225 5.4W | E27 | phase-cut dim

	CODE
2200K | 428lm	9003E129
2700K | 506lm	9003E136

more lamps and specs on page 732



5.0 GLOBE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated

IP20 3.32kg

	CODE
2.6m	2432E0B0
6m	2435E0B0

OPTIONAL

T30-300 6.8W/7W | E27 | phase-cut dim

	CODE
2200K | 582lm	9003E130
2700K | 632lm	9003E135

more lamps and specs on page 732



ALMWELLNESS HOTEL PIERER TEICHALM | AUSTRIA



WIRO

CEILING SUSPENDED



1.0 CONE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

IP20 1.60kg



rust
V



black
B

	CODE
2.6m	2451E0V0
2.6m	2451E0B0
6m	2452E0V0
6m	2452E0B0

more suspension options on page 86

OPTIONAL

T30-225 5.4W | E27 | phase-cut dim

	CODE
2200K | 428lm	9003E129
2700K | 506lm	9003E136

more lamps and specs on page 732

BERND STEINHUBER

back







cable plug with
dimmer switch



rust
V



black
B



1.0 CONE

T30 max. 25W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

IP20 1.85kg

	CODE
	3341E0V0
	3341E0B0

OPTIONAL

T30-225 5.4W | E27 | phase-cut dim

	CODE
2200K | 428lm	9003E129
2700K | 506lm	9003E136

more lamps and specs on page 732



1.0 CONE PLUG

T30 max. 25W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished
cable plug with dimmer switch

IP20 2.15kg

	CODE
	3343E0V0
	3343E0B0

OPTIONAL

T30-225 5.4W | E27 | phase-cut dim

	CODE
2200K | 428lm	9003E129
2700K | 506lm	9003E136

more lamps and specs on page 732



1.8 WIRO

T30 max. 25W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

IP20 1.95kg

	CODE
	3345E0V0
	3345E0B0

OPTIONAL

T30-225 5.4W | E27 | phase-cut dim

	CODE
2200K | 428lm	9003E129
2700K | 506lm	9003E136

more lamps and specs on page 732



1.8 WIRO PLUG

T30 max. 25W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished
cable plug with dimmer switch

IP20 2.25kg

	CODE
	3346E0V0
	3346E0B0

OPTIONAL

T30-225 5.4W | E27 | phase-cut dim

	CODE
2200K | 428lm	9003E129
2700K | 506lm	9003E136

more lamps and specs on page 732



RESTAURANT AMATO KNOKKE | BELGIUM

WIRO

CEILING SURFACE



1.0 CONE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

IP20 1.56kg

	CODE
	2080E0V0
	2080E0B0

OPTIONAL

T30-225 5.4W | E27 | phase-cut dim

	CODE
2200K | 428lm	9003E129
2700K | 506lm	9003E136

more lamps and specs on page 732



1.8 WIRO

T30 max. 25W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

IP20 1.66kg

	CODE
	2082E0V0
	2082E0B0

OPTIONAL

T30-225 5.4W | E27 | phase-cut dim

	CODE
2200K | 428lm	9003E129
2700K | 506lm	9003E136

more lamps and specs on page 732



2.0 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

IP20 0.78kg

	CODE
	2086E0V0
	2086E0B0

OPTIONAL

A60 6W | E27 | phase-cut dim

	CODE
2200K | 428lm	9003E109
2700K | 506lm	9003E138

more lamps and specs on page 732



3.8 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel powder coated
steel varnished

IP20 2.71kg

	CODE
	2083E0V0
	2083E0B0

OPTIONAL

T30-225 5.4W | E27 | phase-cut dim

	CODE
2200K | 428lm	9003E129
2700K | 506lm	9003E136

more lamps and specs on page 732



J.J.W. 05

J.J.W. 042

J.J.W. 02

CURIOUS?
weverducre.com/jjw

DESIGNER

“You can learn new things from old ones.”

JULES WABBES

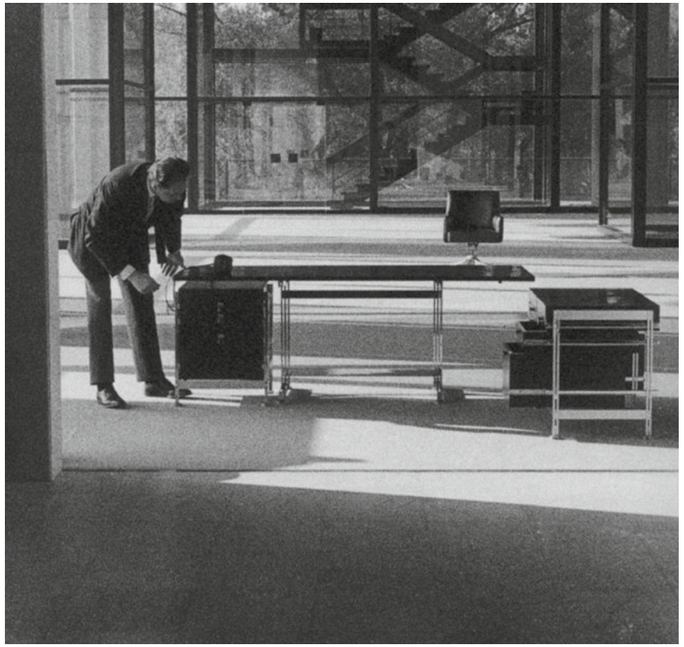

Jules Wabbes with one of his desks at the Royale Belge, Brussels, 1971, ©Wabbes Sofam, Brussels, 2017.

Jules Wabbes (1919–1974), who had a penchant for finding new ideas at flea markets, must have had the same thought. It’s no wonder people said that the Belgian architect and furniture designer had a unique eye for shapes and materials. And that is apparent in his countless designs, which still haven’t gone out of fashion even today. A shining example is the chandelier, developed in the 1970s, whose futuristic, floral form is as much at home in a modern bar as in a posh hotel lobby.

So oder so ähnlich könnte Jules Wabbes (1919–1974) gedacht haben,der sich gerne auf Flohmärkten inspirieren ließ. Kein Wunder, dass man dem belgischen Architekten und Möbeldesigner einen ganz besonderen Blick für Formen und Materialien nachsagte. Dieser manifestiert sich in seinen zahlreichen Entwürfen, die bis heute nicht aus der Mode gekommen sind. Bestes Beispiel: Ein in den 1970er Jahren entworfener Kronleuchter, dessen futuristische, florale Form sich damals wie heute gleichermaßen perfekt in moderne Bars und edle Hotel-Lobbys einfügt.



MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS| L'OBSERVATOIRE DE LA NUIT, VINEUIL-SAINT-FIRMIN | FRANCE

JULES WABBES

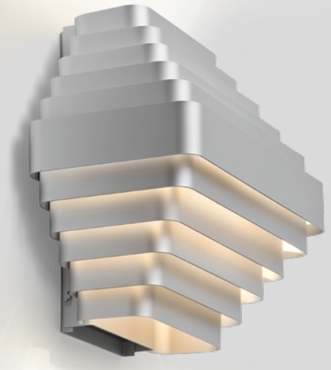

back

J.J.W.

WALL SURFACE



01

2x A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 2.92kg

	CODE
	2054E0S0
	2054E0G0

OPTIONAL

A60 3.8W/5.3W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 602lm	9003E138

more lamps and specs on page 732



RESTAURANT MISMO | FUTURE LIVING DIEGEM | BELGIUM



J.J.W.

WALL SURFACE



02

A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 1.02kg

	CODE
	2055E0S0
	2055E0Q0
	2055E0G0

OPTIONAL

A60 3.8W/5.3W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 602lm	9003E138

more lamps and specs on page 732

JULES WABBES

back



PRIVATE RESIDENCE AUSTRIA

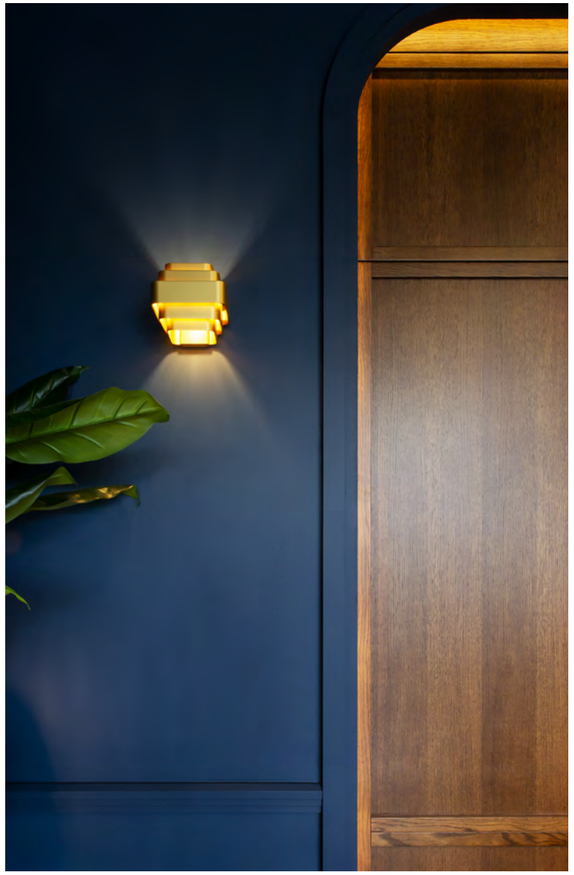

HAIRDRESSER TON SUR TON | SIMON DE BACKERE KORTRIJK | BELGIUM

CEILING SURFACE



OFFICE PROWINKO | CONIX RDBM ARCHITECTS BRUSSELS | BELGIUM





03

3x A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 4.00kg

	CODE
	2051E0S0
	2051E0G0

OPTIONAL

A60 3.8W/5.3W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 602lm	9003E138

more lamps and specs on page 732

JULES WABBES

back



HAIRDRESSER TON SUR TON | SIMON DE BACKERE KORTRIJK | BELGIUM



JULES WABBES

J.J.W.

CEILING SUSPENDED



04

6x A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 4.50kg

	CODE
	2052E0S0
	2052E0G0

OPTIONAL

A60 3.8W/5.3W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 602lm	9003E138

more lamps and specs on page 732

back



MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS
L'OBSERVATOIRE DE LA NUIT VINEUIL-SAINT-FIRMIN | FRANCE



J.J.W.

CEILING SUSPENDED



042

6x A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 8.10kg

	CODE
	2056E0S0
	2056E0G0

OPTIONAL

A60 3.8W/5.3W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 602lm	9003E138

more lamps and specs on page 732

JULES WABBES

back



▶ DESIGN WITH LOVE

MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS| L'OBSERVATOIRE DE LA NUIT VINEUIL-SAINT-FIRMIN | FRANCE



MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS
L'OBSERVATOIRE DE LA NUIT VINEUIL-SAINT-FIRMIN | FRANCE



J.J.W.

CEILING SUSPENDED



05

3x A60 max. 50W | E27
220-240VAC | 50-60Hz
aluminium wet painted

IP20 8.50kg

	CODE
	2053E0S0
	2053E0G0

OPTIONAL

A60 3.8W/5.3W | E27 | phase-cut dim

	CODE
2200K | 247lm	9003E109
2700K | 602lm	9003E138

more lamps and specs on page 732

JULES WABBES

back



REVER DINING

TABLE

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design



1.0

LED 2W | touch dim
magnetic pole with optional base
rechargeable li-ion battery
incl. 1.5m USB charging cable
lights up to 8 hours | powder
coated zink alloy | PMMA

IP23 SDCM3 L80|60K 0.80kg

lamp body

	CODE
	655186Q_
	655186B_

LIGHT COLOUR	LUMEN | CRI	CODE
2200K	115 | >80	1



W

lamp body

	CODE
	655186Q_
	655186W_
	655186B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	135 | >80	2



Q



B

OPTIONAL

multiple charging tray | up to 4 fixtures

	CODE
	90018007

ALWAYS USE



flat metal plate to add to REVER DINING with magnetic fixation suitable to put under the table cloth

plate colours

	CODE
	90019163
	90019164



single metal charging tray to add to REVER DINING with magnetic fixation

tray colours

	CODE
	90019175
	90019165
	90019166

CEILING RECESSED

134 — 225

CEILING RECESSED SPOTLIGHTS


DEEP BIJOU
139


DEEP PETIT
141


DEEP
143


DEEPER
145


DEEP ADJUST PETIT
147


DEEP ADJUST
149


DEEP ADJUST TRIMLESS
155


DEEP ASYM ADJUST
157


DEEP ADJUST FORT
159


SPINEO
161


RONY
163


PIRRO SPOT
165


RON
169


PLANO PETIT
171


PLANO
173


PLANO FORT
175


STRANGE PETIT
177


STRANGE
179


SNEAK TRIM
181


SNEAK TRIMLESS
183

CEILING SEMI-RECESSED LUMINAIRES


MATCH
187


CENO 1.0
189


CENO 2.0
191


BLIEK ROUND PETIT
195


BLIEK ROUND
197


BLIEK SQUARE
199


RUVI
201

CEILING RECESSED IP-RATED


DEEP BIJOU IP65
205


DEEP IP44 | IP65
207


DEEPER IP44
209


TAIO IP65
213

LUNA ROUND IP44
215


RINI SNEAK IP44
217

LUNA SQUARE IP44
219


PLANO IP44
221


MIRBI IP44 1.0 | 2.0
223


CITY IP44
225

HOW DEEP IS YOUR DEEP?

DEEP

FIX



bijou 1.0
LED



bijou 2.0
LED



petit 1.0
LED



1.0
LED | MR16 | PAR16



bijou IP65 1.0
LED



IP44 / IP65 1.0
LED | MR16 | PAR16

DEEP ADJUST

ADJUSTABLE



petit 1.0
LED



1.0
LED | MR16 | PAR16



trimless 1.0
LED | MR16 | PAR16



2.0
LED | PAR16



fort 1.0
LED

DEEPER

FIX



1.0
LED | MR16 | PAR16



IP44 1.0
LED | MR16 | PAR16

DEEP CONNECTIONS

DEEP and DEEPER are classic downlights and emit their light beam straight down. Perfect for any room, be it a hallway or living room. But the recessed lights have so much more to offer. DEEP is available in different versions and a variety of sizes. And as an IP44 variant with splash protection as well as an IP65 variant with protection against water jets. This means you can also mount the starry sky in your bathroom. Incidentally, DEEPER is also available as an IP44 variant, which disappears into your ceiling and is virtually invisible. Practical – the entire DEEP family can be controlled via smartphone.

DEEP und DEEPER sind klassische Downlights und geben ihren Lichtstrahl gerade nach unten ab. Perfekt für alle Räume, egal ob Flur oder Wohnzimmer. Doch die Einbauleuchten haben noch viel mehr drauf. So ist DEEP in verschiedenen Versionen und unterschiedlichen Größen zu haben. Und als IP44-Variante spritzwasser- und als IP65-Variante strahl-wassergeschützt. Da kann man sich den Sternenhimmel auch ins Badezimmer montieren. Übrigens: Auch DEEPER gibt's als IP44-Variante, die fast unsichtbar in der Decke verschwindet. Praktisch: Die gesamte DEEP Familie kann via Smartphone gesteuert werden.

DEEP ASYM

ADJUSTABLE



1.0
LED | PAR16

DON'T BE SHY

Want to place your Ming vase in the right light? Then the swivelling spotlights from the DEEP range are the ideal solution for you. This means your vase can wander around and still remain perfectly lit. Simply readjust by hand. Do you actually have a fresco mural or a special surface structure? Then DEEP ASYM is the perfect solution: The consistent wall washer effect will certainly WOW your guests. Guaranteed.

Sie möchten Ihre Ming Vase ins rechte Licht rücken? Dann sind die schwenkbaren Spots der DEEP Familie die perfekte Lösung für Sie. Damit kann die Vase nämlich auch mal wandern und sie bekommt trotzdem wieder das perfekte Licht. Einfach händisch nachjustieren. Sie haben tatsächlich ein Wandfresko oder eine besondere Oberflächenstruktur? Dann ist DEEP ASYM die perfekte Lösung: Der gleichmäßige Wallwasher-Effekt wird Ihren Gästen ein WOW entlocken. Garantiert.



HAVE A LOOK
weverducre.com/deep



HOTEL BRITANNIA | S-CONSULTANCY KNOKKE-HEIST | BELGIUM

DEEP bijou

CEILING RECESSED









1.0

LED COB 6W | 250mA | 17V
excl. driver
aluminium powder coated

IP20 30° SDCM2 L80|50K 0.065kg

wire springs 50-52 85 4-25

	CODE
	165161W_
	165161G_
	165161B_

blade springs 51-54 85 4-25

	CODE
	165161W_C
	165161G_C
	165161B_C

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	360 | >90	3
3000K	380 | >90	5

ALWAYS USE

driver | 250mA

	CODE
10W dim	90226401
10W DALI	90249402

more options and specs on page 724

2.0

2x LED COB 6W | 250mA | 34V
excl. driver
aluminium powder coated

IP20 30° SDCM2 L80|50K 0.15kg

wire springs 50-52x100-104 60 4-25

	CODE
	165261W_
	165261G_
	165261B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x360 | >90	3
3000K	2x380 | >90	5

ALWAYS USE

driver | 250mA | only 1x needed

	CODE
15W dim	90226501
10W DALI	90249402

more options and specs on page 724



IP version
p. 205



low recessed
depth only for
2.0 LED



IC rated

back

585



PRIVATE RESIDENCE | ANKER & CO DENMARK

DEEP petit

CEILING RECESSED











low recessed depth



IC rated



fits into Kaiser ThermoX®
9320-11



1.0 LED

LED COB 6W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 34° SDCM2 L80|50K 0.04kg

wire springs 68-70 50 4-23

	CODE
	153561W_
	153561S_
	153561G_
	153561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>90	3
3000K	570	>90	5
2000-3000K|12V	440	>95	9

ALWAYS USE

driver | 350mA

	CODE
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 724

back



OPTIEK SAGAERT | ENTIRUS GROUP ZWEVEGEM | BELGIUM









20 Years Replaceability



IP version
p. 207

DEEP

CEILING RECESSED



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 36° SDCM2 L80|50K 0.31kg

wire springs 76-79 90 4-27

	CODE
	184261W_
	184261S_
	184261G_
	184261B_

blade springs 76-79 90 min 10

	CODE
	184261W_C
	184261B_C

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	530/710 | >90	3
3000K	575/770 | >90	5
4000K	615/825 | >90	7
2000-3000K|12V	380/560 | >95	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP20 0.25kg

wire springs 76-79 90 4-27

	CODE
	112110W0
	112110S0
	112110G0
	112110B0

blade springs 76-79 90 min 10

	CODE
	112110W0C
	112110B0C

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 727



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0.29kg

wire springs 76-79 105 4-27

	CODE
	112120W0
	112120S0
	112120G0
	112120B0

blade springs 76-79 105 min 10

	CODE
	112120W0C
	112120B0C

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

back

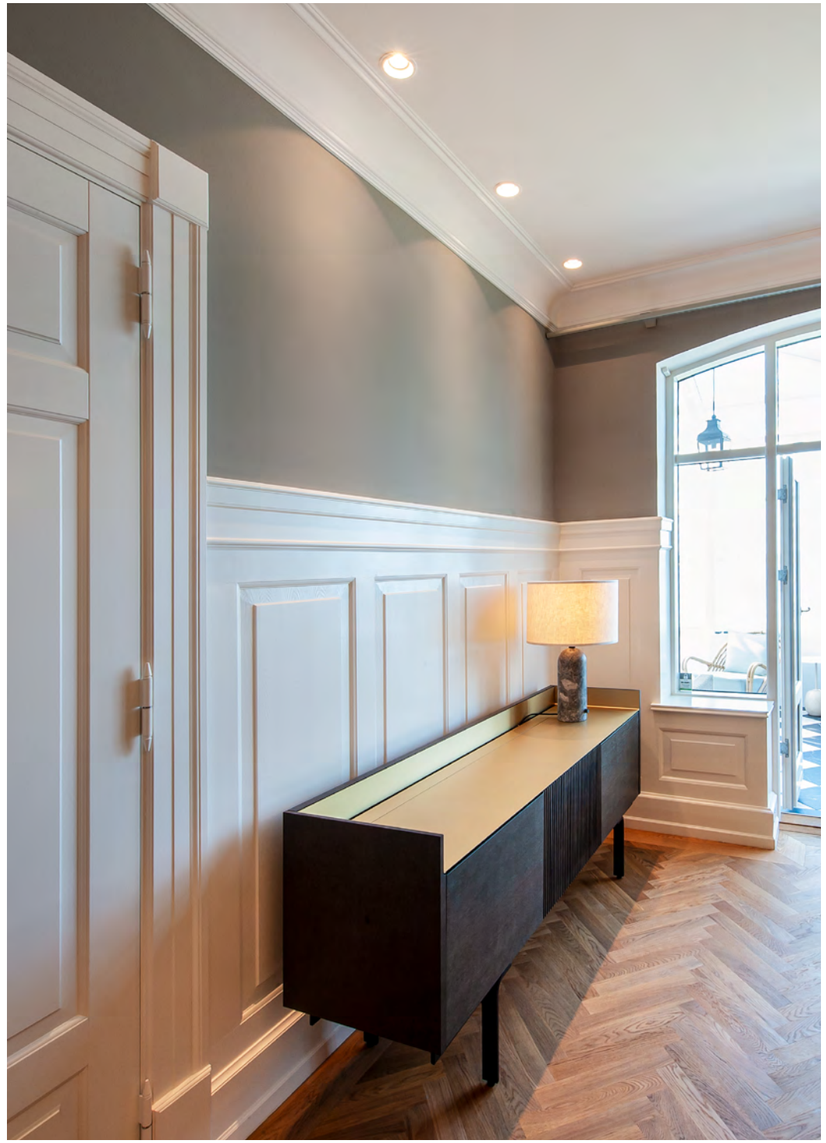

PRIVATE RESIDENCE | HELLE FLOU DENMARK

20 Years Replaceability

IP version
p. 209

DEEPER

CEILING RECESSED















1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 36° SDCM2 L80|50K 0.17kg

wire springs 76-79 95 4-38

	CODE
	152361W_
	152361S_
	152361G_
	152361Q_
	152361B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	505/685 | >90	3
3000K	550/740 | >90	5
2000-3000K|12V	380/560 | >95	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725

1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP20 0.11kg

wire springs 76-79 100 4-38

	CODE
	152110W0
	152110S0
	152110G0
	152110Q0
	152110B0

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 727

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0.15kg

wire springs 76-79 115 4-38

	CODE
	152120W0
	152120S0
	152120G0
	152120Q0
	152120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

back



PRIVATE RESIDENCE | EVA CARLIER INTERIOR DESIGN BELGIUM

DEEP ADJUST petit

CEILING RECESSED













low recessed depth



IC rated



fits into Kaiser ThermoX®
9320-11



1.0 LED

LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 34° SDCM2 L80|50K 0.05kg

wire springs 68-70 65 4-23

	CODE
	153661W_
	153661M_
	153661G_
	153661Q_
	153661B_

blade springs 69-71 65 min 8

	CODE
	153661W_C
	153661B_C

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	540 | >90	3
3000K	570 | >90	5
2000-3000K|12V	440 | >95	9

ALWAYS USE

driver | 350mA

	CODE
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 724

back

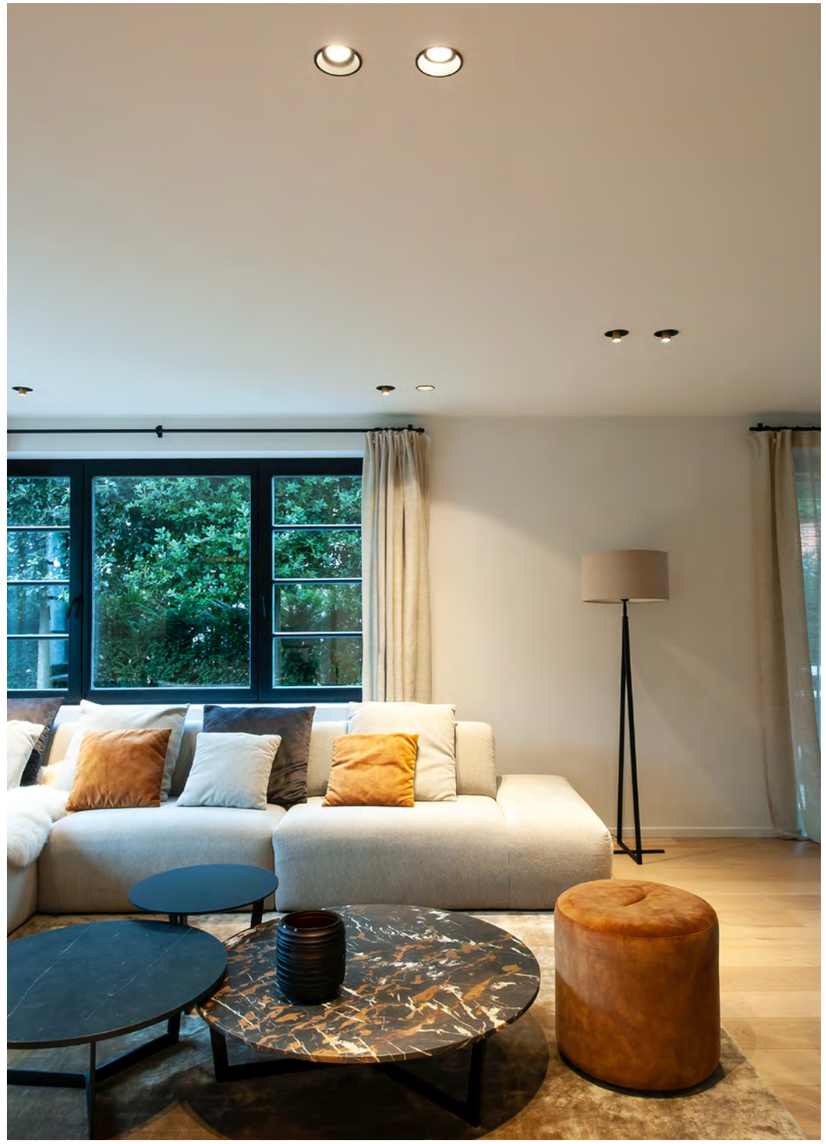









DEEP ADJUST

CEILING RECESSED







1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.23kg

wire springs 86-89 90 4-23

	CODE
	184361W_
	184361S_
	184361M_
	184361G_
	184361Q_
	184361B_

blade springs 86-89 90 min 6

	CODE
	184361W_C
	184361B_C

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	530/715 | >90	3
3000K	575/775 | >90	5
4000K	620/830 | >90	7
2000-3000K|12V	380/560 | >95	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725

1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 0.17kg

wire springs 86-89 90 4-23

	CODE
	112310W0
	112310S0
	112310M0
	112310G0
	112310Q0
	112310B0

blade springs 86-89 90 min 6

	CODE
	112310W0C
	112310B0C

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 727

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.21kg

wire springs 86-89 105 4-23

	CODE
	112320W0
	112320S0
	112320M0
	112320G0
	112320Q0
	112320B0

blade springs 86-89 105 min 6

	CODE
	112320W0C
	112320B0C

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

20 Years Replaceability

PRIVATE RESIDENCE | CLAS ARCHITECTEN BELGIUM

back

WEVER & DUCRÉ 148 — 149



PRIVATE RESIDENCE | ANKER & CO DENMARK



PRIVATE RESIDENCE | INTÉRIEURS D'ARCHITECTES FRANCE

DEEP ADJUST

CEILING RECESSED







2.0 LED

LED 2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.61kg

wire springs 89x172-178 90 4-23

	CODE
	184761W_
	184761B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x530/715	>90	3
3000K	2x575/775	>90	5
4000K	2x620/830	>90	7
2000-3000K|12V	2x380/560	>95	9

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.42kg

wire springs 89x172-178 105 4-23

	CODE
	112720W0
	112720B0

ALWAYS USE

driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 726

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

20 Years Replaceability

back



MOUNT REGALIA | IN-BETWEEN ARCHITECTS LIMITED KAU TO SHAN | HONGKONG







20 Years Replaceability

DEEP ADJUST trimless

CEILING RECESSED



1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.23kg

	CODE
	184861W_
	184861G_
	184861B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	530/715	>90	3
3000K	575/775	>90	5
4000K	620/830	>90	7
2000-3000K|12V	380/560	>95	9

ALWAYS USE

plasterkit 105-110 95 12.5, 15, 20, 25

	CODE
	90017209

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 0.17kg

	CODE
	112810W0
	112810G0
	112810B0

ALWAYS USE

plasterkit 105-110 95 12.5, 15, 20, 25

	CODE
	90017209

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 727



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.21kg

	CODE
	112820W0
	112820G0
	112820B0

ALWAYS USE

plasterkit 105-110 110 12.5, 15, 20, 25

	CODE
	90017209

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731



OFFICE INARTO | INARTO ARCHITECTEN HERENTALS | BELGIUM









20 Years Replaceability

DEEP ASYM adjust

CEILING RECESSED





1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° SDCM2 L80|50K 0.25kg

wire springs 87-88 100 4-25

	CODE
	184461W_
	184461S_
	184461G_
	184461B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	460/615 | >90	3
3000K	495/665 | >90	5
2000-3000K|12V	330/485 | >95	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.23kg

wire springs 87-88 115 4-25

	CODE
	112420W0
	112420S0
	112420G0
	112420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731



PRIVATE RESIDENCE AUSTRIA

DEEP ADJUST fort

CEILING RECESSED





1.0

LED COB 25W | 700mA | 35V
excl. driver
aluminium powder coated

IP20 0°-30°|355° 34° SDCM2 L80|60K 0.36kg

wire springs 126-130 130 4-25

	CODE
	112961W_
	112961B_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	2490 | >90	5
4000K	2680 | >90	7

ALWAYS USE

driver | 700mA

	CODE
30W dim	90225702
35W DALI	90245801

more options and specs on page 727

20 Years Replaceability

back



PRIVATE RESIDENCE BELGIUM



SPINEO

CEILING RECESSED



65

ø92

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.18kg

wire springs 79-83 70 4-16

	CODE
	160120W0
	160120B0

blade springs 79-83 70 min 4

	CODE
	160120W0C
	160120B0C



fits into Kaiser
ThermoX®
9320-11

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

back



PRIVATE RESIDENCE | CANDICE BRUNY FRANCE



RONY

CEILING RECESSED





1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.34kg

wire springs 102-104 90 4-25

	CODE
	110261W_
	110261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	530/710	>90	3
3000K	575/770	>90	5
2000-3000K|12V	380/560	>95	9

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.32kg

wire springs 102-104 100 4-25

	CODE
	1101120W0
	1101120B0

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

20 Years Replaceability

back



PRIVATE RESIDENCE GERMANY

PIRRO

CEILING RECESSED





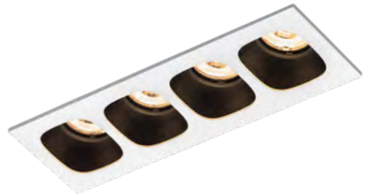

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

257

367 | 399









1.0

LED COB 5W | 500mA | 8V
excl. driver
aluminium powder coated

IP20 32° SDCM2 L80|50K 0.09kg

wire springs 50x50 85 4-25

	CODE
	150161E_
	150161J_
	150161K_
	150161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	420	>90	5

2.0

2x LED COB 5W | 500mA | 17V
excl. driver
aluminium powder coated

IP20 32° SDCM2 L80|50K 0.16kg

wire springs 93x50 60 4-25

	CODE
	150261E_
	150261J_
	150261K_
	150261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x400	>90	3
3000K	2x420	>90	5

4.0

4x LED COB 5W | 500mA | 34V
excl. driver
aluminium powder coated

IP20 32° SDCM2 L80|50K 0.28kg

wire springs 181x50 60 4-25

	CODE
	150461E_
	150461J_
	150461K_
	150461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x400	>90	3
3000K	4x420	>90	5

6.0

6x LED COB 5W | 500mA | 2x25V
excl. driver
aluminium powder coated

IP20 32° SDCM2 L80|50K 0.40kg

wire springs 269x50 60 4-25

	CODE
	150661E_
	150661J_
	150661K_
	150661B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x400	>90	3
3000K	6x420	>90	5



IC rated



honeycomb

OPTIONAL

honeycomb louver

	CODE
	90051130
	90051131

ALWAYS USE

driver | 500mA

	CODE
6.5W dim	90224301
20W DALI	90244604

more options and specs on page 725

ALWAYS USE

driver | 500mA | only 1x needed

	CODE
10W dim	90224503
20W DALI	90244604

more options and specs on page 726

ALWAYS USE

driver | 500mA | only 1x needed

	CODE
20W dim	90224602
20W DALI	90244604

more options and specs on page 726

ALWAYS USE

driver | 500mA | 2x needed

	CODE
20W dim	90224602
20W DALI	90244604

more options and specs on page 726

HIDDEN CHAMPIONS

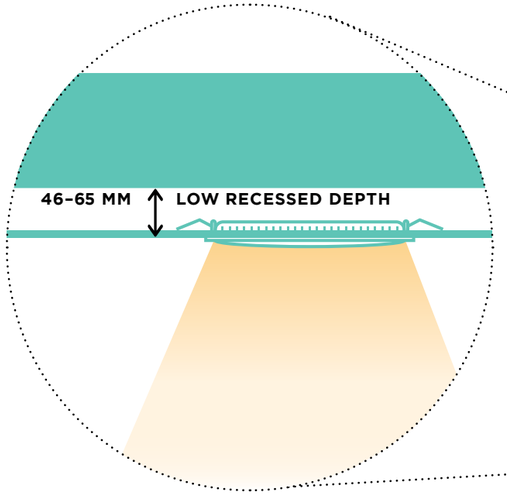

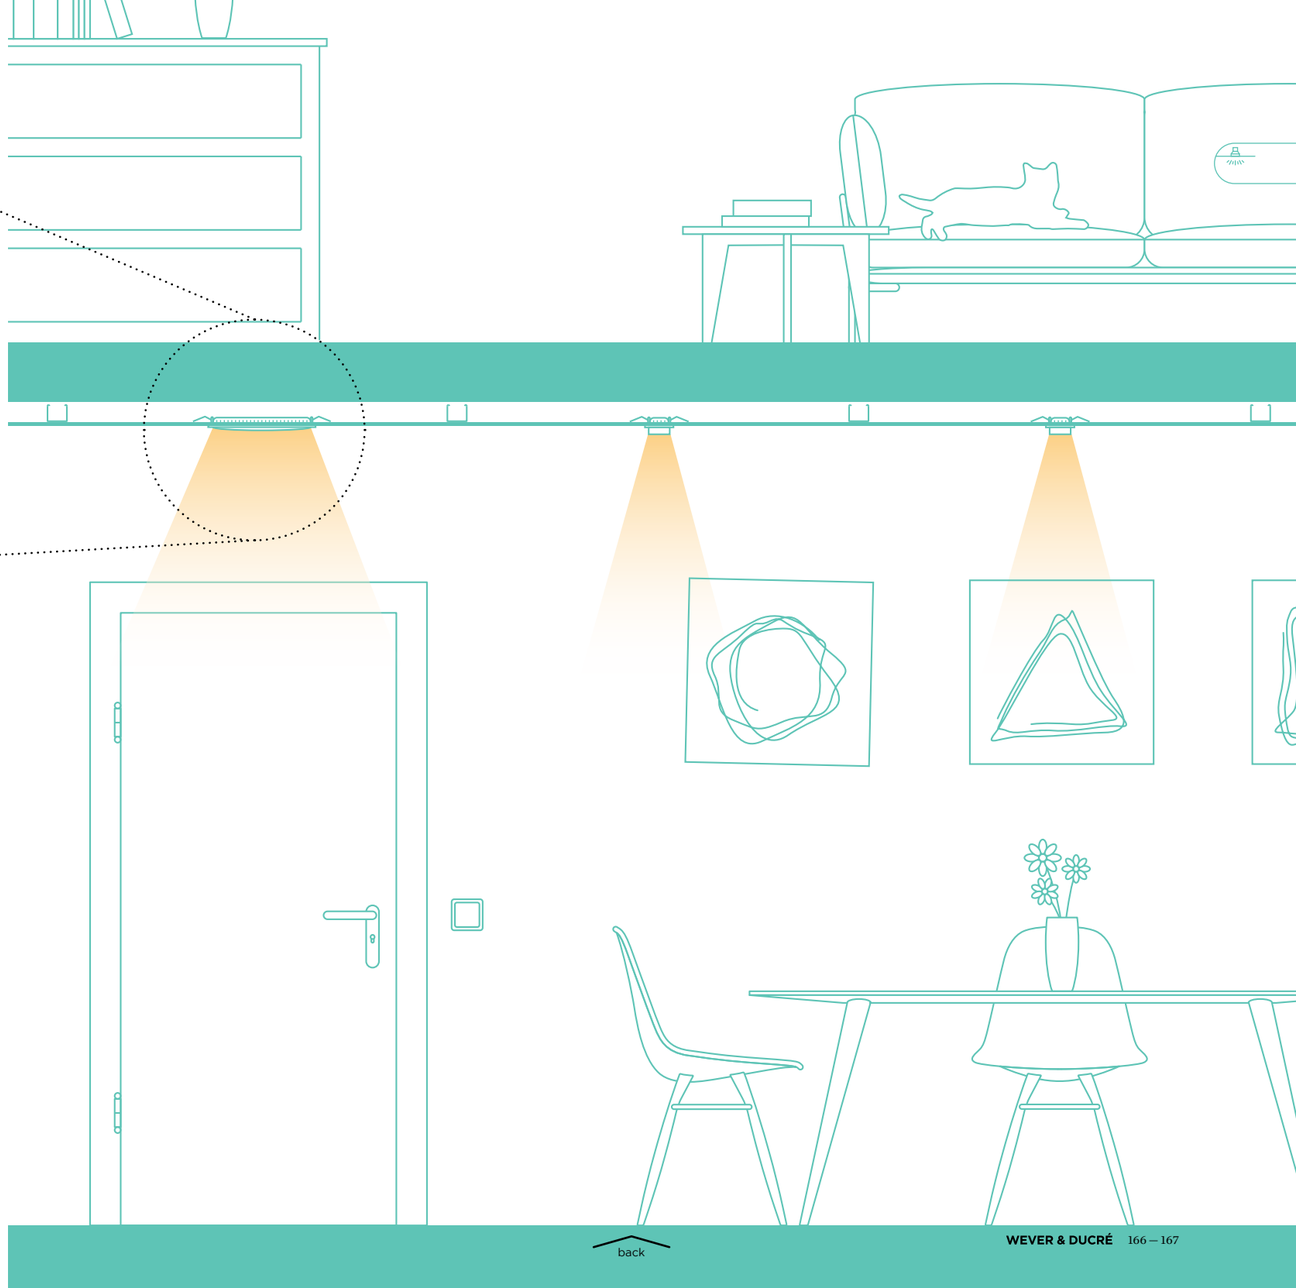

FLAT ‘N’ FANCY

Sleek built-in luminaires are subtle, elegant, and let every room shine in the brightest light. No wonder the space-saving all-rounders are among the most popular lighting choices these days. That said, there are some requirements you’ll need to consider when mounting recessed luminaires. Especially with low ceilings in modern living spaces or the lack of space in suspended ceilings, things can get really tricky – and every centimetre counts. The solution? Extra low recessed ceiling luminaires by Wever & Ducré. The small, compact lights have been specially designed for low ceilings with low installation depths and are not only true space savers, but also a design highlight – perfect for renovation projects and small city apartments.

HOCH HINAUS

Schlichte Einbauleuchten halten sich optisch elegant im Hintergrund, während sie jeden Raum in seinem besten Licht erstrahlen lassen. Kein Wunder also, dass die platzsparenden Alleskönner so beliebt sind. Trotzdem: Gewisse Voraussetzungen müssen für den Einbau gegeben sein. Denn vor allem mit niedrigen Deckenhöhen in modernen Wohnräumen oder zu wenig Platz in den Zwischendecken kann es schon mal ganz schön knifflig werden – dabei zählt jeder Zentimeter. Die Lösung: besonders flache Einbauleuchten von Wever & Ducré. Die kleinen, kompakten Leuchten wurden speziell für niedrige Räume mit wenig Einbautiefe entwickelt und sind nicht nur platzsparend, sondern vor allem auch ein echtes Designhighlight – perfekt für Renovierungsprojekte und kleine City-Apartments.

DEEP bijou 2.0	p. 139	**60 mm**
DEEP petit	p. 141	**50 mm**
DEEP ADJUST petit	p. 147	**65 mm**
PIRRO 2.0 | 4.0 | 6.0	p. 165	**60 mm**
PLANO petit	p. 171	**65 mm**
CENO 2.0 | 3.0	p. 191	**60 mm**
BLIEK ROUND petit	p. 195	**60 mm**
LUNA ROUND IP44	p. 215	**50 mm**
RINI SNEAK IP44	p. 217	**46 mm**
LUNA SQUARE IP44	p. 219	**50 mm**
MIRBI IP44	p. 223	**50 mm**
CITY IP44	p. 225	**50 mm**

back



SHOWROOM | GRANDO KEUKENS SINT-MARTENS-LATEM | BELGIUM

20 Years Replaceability

1.0 fits in round cut out

RON

CEILING RECESSED













1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.36kg

wire springs 102-104 90 4-25

	CODE
	111461W_
	111461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	530/710	>90	3
3000K	575/770	>90	5
2000-3000K|12V	380/560	>95	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725

2.0 LED

2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.73kg

wire springs 102x210 90 4-25

	CODE
	111561W_
	111561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x530/710	>90	3
3000K	2x575/770	>90	5
2000-3000K|12V	2x380/560	>95	9

ALWAYS USE

driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 725

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.34kg

wire springs 102-104 100 4-25

	CODE
	111120W0
	111120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.69kg

wire springs 102x210 100 4-25

	CODE
	111220W0
	111220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

back



PRIVATE RESIDENCE BELGIUM

PLANO petit

CEILING RECESSED













1.0

LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-25°|355° 34° SDCM2 L80|50K 0.08kg

wire springs 54x59 65 2-22

	CODE
	162461W_
	162461Q_
	162461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>90	3
3000K	570	>90	5
2000-3000K|12V	440	>95	9

ALWAYS USE

driver | 350mA

	CODE
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 724

2.0

LED 2x LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-25°|355° 34° SDCM2 L80|50K 0.15kg

wire springs 54x110 65 2-22

	CODE
	162561W_
	162561Q_
	162561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x540	>90	3
3000K	2x570	>90	5
2000-3000K|12V	2x440	>95	9

ALWAYS USE

driver | 700mA | only 1x needed

	CODE
20W	90218601
15W dim	90225502
20W DALI	90245602

more options and specs on page 725

3.0

LED 3x LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-25°|355° 34° SDCM2 L80|50K 0.22kg

wire springs 54x162 65 2-22

	CODE
	162661W_
	162661Q_
	162661B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x540	>90	3
3000K	3x570	>90	5
2000-3000K|12V	3x440	>95	9

ALWAYS USE

driver | 350mA | 3x needed

	CODE
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 724





low recessed depth



IC rated

back



PRIVATE RESIDENCE | HELLE FLOU DENMARK

PLANO

CEILING RECESSED

















1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.26kg

wire springs 74x78 95 2-18

	CODE
	118561W_
	118561S_
	118561Q_
	118561B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	510/685 | >90	3
3000K	550/740 | >90	5
2000-3000K|12V	365/535 | >95	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725

2.0 LED

2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.48kg

wire springs 74x148 95 2-18

	CODE
	118661W_
	118661S_
	118661Q_
	118661B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x510/685 | >90	3
3000K	2x550/740 | >90	5
2000-3000K|12V	2x365/535 | >95	9

ALWAYS USE

driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 725

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.24kg

wire springs 74x78 120 2-18

	CODE
	118120W0
	118120S0
	118120Q0
	118120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.44kg

wire springs 74x148 120 2-18

	CODE
	118220W0
	118220S0
	118220Q0
	118220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

20 Years Replaceability

IP version
p. 221

279



SHOWROOM KANVAS LIQUIDFLOORS | WEWANTMORE.STUDIO WIJNEGEM | BELGIUM

PLANO fort

CEILING RECESSED







1.0

LED COB 25W | 700mA | 35V
excl. driver
aluminium powder coated

IP20 0°-30°|355° 34° SDCM2 L70|50K 0.38kg

wire springs 111x111 130 4-25

	CODE
	118961W_
	118961B_

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	2490	>90	5
4000K	2680	>90	7

ALWAYS USE

driver | 700mA

	CODE
30W dim	90225702
35W DALI	90245801

more options and specs on page 727

20 Years Replaceability

back



PRIVATE RESIDENCE | LOFT4C INTERIEURARCHITECTEN BELGIUM

STRANGE petit

CEILING RECESSED













1.0 LED

LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-25°|355° 34° SDCM2 L80|50K 0.07kg

	CODE
	163461W_
	163461M_
	163461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>90	3
3000K	570	>90	5
2000-3000K|12V	440	>95	9

ALWAYS USE

alu plasterkit 64x64 65 7-17

	CODE
	90017202

driver | 350mA

	CODE
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 724

2.0 LED

2x LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-25°|355° 34° SDCM2 L80|50K 0.13kg

	CODE
	163561W_
	163561M_
	163561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x540	>90	3
3000K	2x570	>90	5
2000-3000K|12V	2x440	>95	9

ALWAYS USE

alu plasterkit 64x117 65 7-17

	CODE
	90017205

driver | 700mA | only 1x needed

	CODE
20W	90218601
15W dim	90225502
20W DALI	90245602

more options and specs on page 725

3.0 LED

3x LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-25°|355° 34° SDCM2 L80|50K 0.19kg

	CODE
	163661W_
	163661M_
	163661B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x540	>90	3
3000K	3x570	>90	5
2000-3000K|12V	3x440	>95	9

ALWAYS USE

alu plasterkit 64x169 65 7-17

	CODE
	90017208

driver | 350mA | 3x needed

	CODE
10W	90223401
10W dim	90223402
17W DALI	90243601

more options and specs on page 724





low recessed depth

back



PRIVATE RESIDENCE | COBRAS | THE ART OF LIVING MAGAZINE BELGIUM

20 Years Replaceability

STRANGE

CEILING RECESSED













1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.43kg

	CODE
	131461W_
	131461M_
	131461B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	510/685 | >90	3
3000K	550/740 | >90	5
2000-3000K|12V	365/535 | >95	9

ALWAYS USE

alu plasterkit 86x86 95 8-32

	CODE
	90017120

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725

2.0 LED

2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.74kg

	CODE
	131561W_
	131561M_
	131561B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x510/685 | >90	3
3000K	2x550/740 | >90	5
2000-3000K|12V	2x365/535 | >95	9

ALWAYS USE

alu plasterkit 86x156 95 8-32

	CODE
	90017121

driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 725

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.41kg

	CODE
	131120W0
	131120M0
	131120B0

ALWAYS USE

alu plasterkit 86x86 120 8-32

	CODE
	90017120

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.70kg

	CODE
	131220W0
	131220M0
	131220B0

ALWAYS USE

alu plasterkit 86x156 120 8-32

	CODE
	90017121

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

back



RIVER STONE | ZOOI INTERIOR STUDIO KIEV | UKRAINE

SNEAK trim

CEILING RECESSED









1.0

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 28° SDCM2 L80|50K 0.19 kg

wire springs 74x78 95 2-18

	CODE
	155751W_
	155751K_
	155751B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	395/530	>90	3
3000K	425/570	>90	5
2000-3000K|12V	280/415	>95	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725

2.0

LED 2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 28° SDCM2 L80|50K 0.34 kg

wire springs 74x148 95 2-18

	CODE
	155851W_
	155851K_
	155851B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x395/530	>90	3
3000K	2x425/570	>90	5
2000-3000K|12V	2x280/415	>95	9

ALWAYS USE

driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 725



K



B



back



PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM

SNEAK trimless

CEILING RECESSED











1.0

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 28° SDCM2 L80|50K 0.19kg

	CODE
	155551W_
	155551K_
	155551B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	395/530 | >90	3
3000K	425/570 | >90	5
2000-3000K|12V	280/415 | >95	9

ALWAYS USE

alu plasterkit 86x86 95 8-32

	CODE
	90017120

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725

2.0

2x COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-35°|355° 28° SDCM2 L80|50K 0.34kg

	CODE
	155651W_
	155651K_
	155651B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x395/530 | >90	3
3000K	2x425/570 | >90	5
2000-3000K|12V	2x280/415 | >95	9

ALWAYS USE

alu plasterkit 86x156 95 8-32

	CODE
	90017121

driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
20W DALI	90244604

more options and specs on page 725

20 Years Replaceability

back

DIM THE LIGHTS

IT CAN BE SO EASY

Lighting a room has never been easier than with our new collection of Bluetooth-compatible products. All it takes to adjust and dim your lights is a simple swipe on your smartphone screen. Sounds easy? It is. Choose your favourite products from our collection, add the Bluetooth dimmer behind the switch and connect them to your light control app and you're good to go. Whether you want bright lights for breakfast, a candle-lit atmosphere for dinner, or anything in between – just kick up your feet and touch to set your desired mood.

Noch nie war die Beleuchtung so einfach wie mit unseren Bluetooth-kompatiblen Produkten – ein einfacher Klick genügt. Klingt einfach? Ist es auch: Lieblingsprodukte aus unserer Kollektion auswählen, den Bluetooth Dimmer hinter dem Lichtschalter hinzufügen, mit Ihrer Light Control App verbinden und los geht's. Ob ein hell erleuchtetes Frühstück, schummrige Atmosphäre für ein Candle-Light-Dinner oder für alles dazwischen – zurücklehnen und die gewünschte Lichtstimmung genießen.

WHAT YOU NEED

smartphone with Wever & Ducré bluetooth app

+

Wever & Ducré bluetooth dimmer find on page 729

+

Wever & Ducré phase-cut dim products

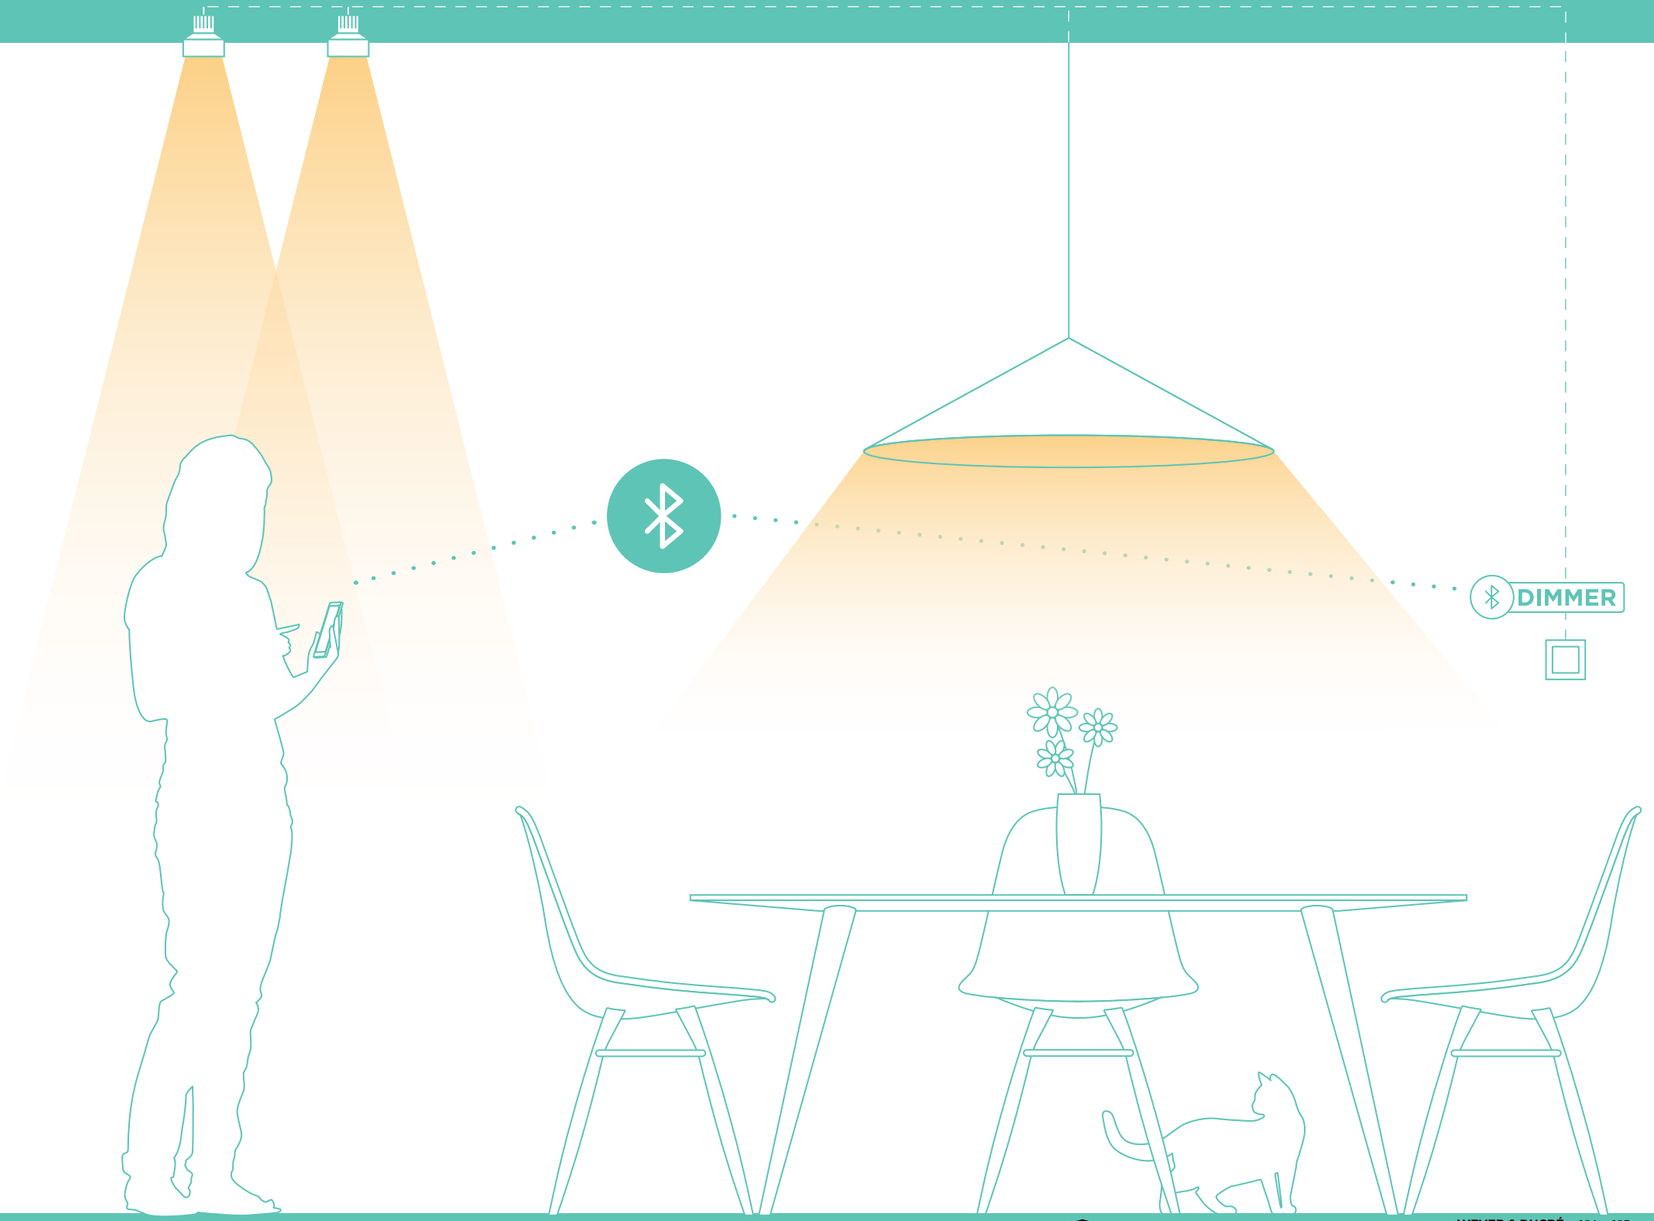



PRIVATE RESIDENCE NORWAY

MATCH

TRIMLESS | CEILING RECESSED











1.0 TRIMLESS

LED COB 6W | 350mA | 18V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 25° SDCM2 L80|50K 0.15kg

45-47 85 4-26

	CODE
	190851W_
	190851B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	510	>90	5

ALWAYS USE

driver | 350mA

	CODE
10W dim	90223402
10W DALI	90243401

more options and specs on page 724

1.0

LED COB 6W | 350mA | 18V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 25° SDCM2 L80|50K 0.14kg

wire springs 45-47 85 4-26

	CODE
	190151W_
	190151H_
	190151B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	510	>90	5

ALWAYS USE

driver | 350mA

	CODE
10W dim	90223402
10W DALI	90243401

more options and specs on page 724

2.0

2x LED COB 6W | 700mA | 18V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 25° SDCM2 L80|50K 0.27kg

wire springs 105x30 60 4-26

	CODE
	190251W_
	190251B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x480	>90	3
3000K	2x510	>90	5

ALWAYS USE

driver | 700mA | only 1x needed

	CODE
15W dim	90225502
35W DALI	90245801

more options and specs on page 727

IC rated

289
325
533



CENO

SEMI RECESSED | CEILING RECESSED









291



327 | 387





1.0 SEMI RECESSED

LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 35° SDCM2 L80|50K 0.13kg

45-47 85 4-26

	CODE
	176561W_
	176561B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	450 | >90	3
3000K	465 | >90	5

1.0

LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 35° SDCM2 L80|50K 0.12kg

wire springs 45-47 85 4-26

	CODE
	176161W_
	176161G_
	176161Q_
	176161K_
	176161B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	450 | >90	3
3000K	465 | >90	5
2000-3000K|12V	355 | >95	9



honeycomb



IC rated

OPTIONAL

honeycomb louver

	CODE
	90051130
	90051131

ALWAYS USE

driver | 350mA

	CODE
10W dim	90223402
10W DALI	90243401

more options and specs on page 724

ALWAYS USE

driver | 350mA

	CODE
10W dim	90223402
10W DALI	90243401

more options and specs on page 724

back



PRIVATE RESIDENCE BELGIUM

CENO

CEILING RECESSED



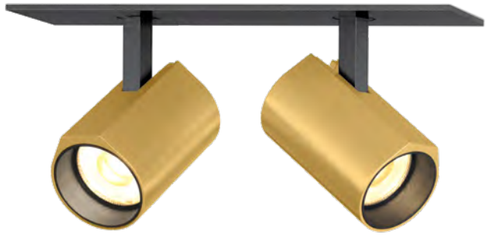

291

327 | 387









low recessed depth only for 2.0 + 3.0 LED version



IC rated



honeycomb

OPTIONAL

honeycomb louver

	CODE
	90051130
	90051131

1.1

LED COB 7W | 350mA | 17V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 35° SDCM2 L80|50K 0.13kg

blade springs 32x66 85 4-26

	CODE
	176461W_
	176461Q_
	176461K_
	176461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	465	>90	5

ALWAYS USE

driver | 350mA

	CODE
10W dim	90223402
10W DALI	90243401

more options and specs on page 724

2.0

2x LED COB 7W | 700mA | 17V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 35° SDCM2 L70|60K 0.26kg

blade springs 32x145 60 4-26

	CODE
	176261W_
	176261Q_
	176261K_
	176261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x450	>90	3
3000K	2x465	>90	5

ALWAYS USE

driver | 700mA | only 1x needed

	CODE
15W dim	90225502
35W DALI	90245801

more options and specs on page 727

3.0

3x LED COB 7W | 700mA | 26V
excl. driver
aluminium powder coated

IP20 0°-90°|350° 35° SDCM2 L70|60K 0.39kg

blade springs 32x221 60 4-26

	CODE
	176361W_
	176361Q_
	176361K_
	176361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x450	>90	3
3000K	3x465	>90	5

ALWAYS USE

driver | 700mA | only 1x needed

	CODE
20W dim	90225604
35W DALI	90245801

more options and specs on page 727

back



FORUM ADVOCATEN | VRV ARCHITECTEN ANTWERP | BELGIUM

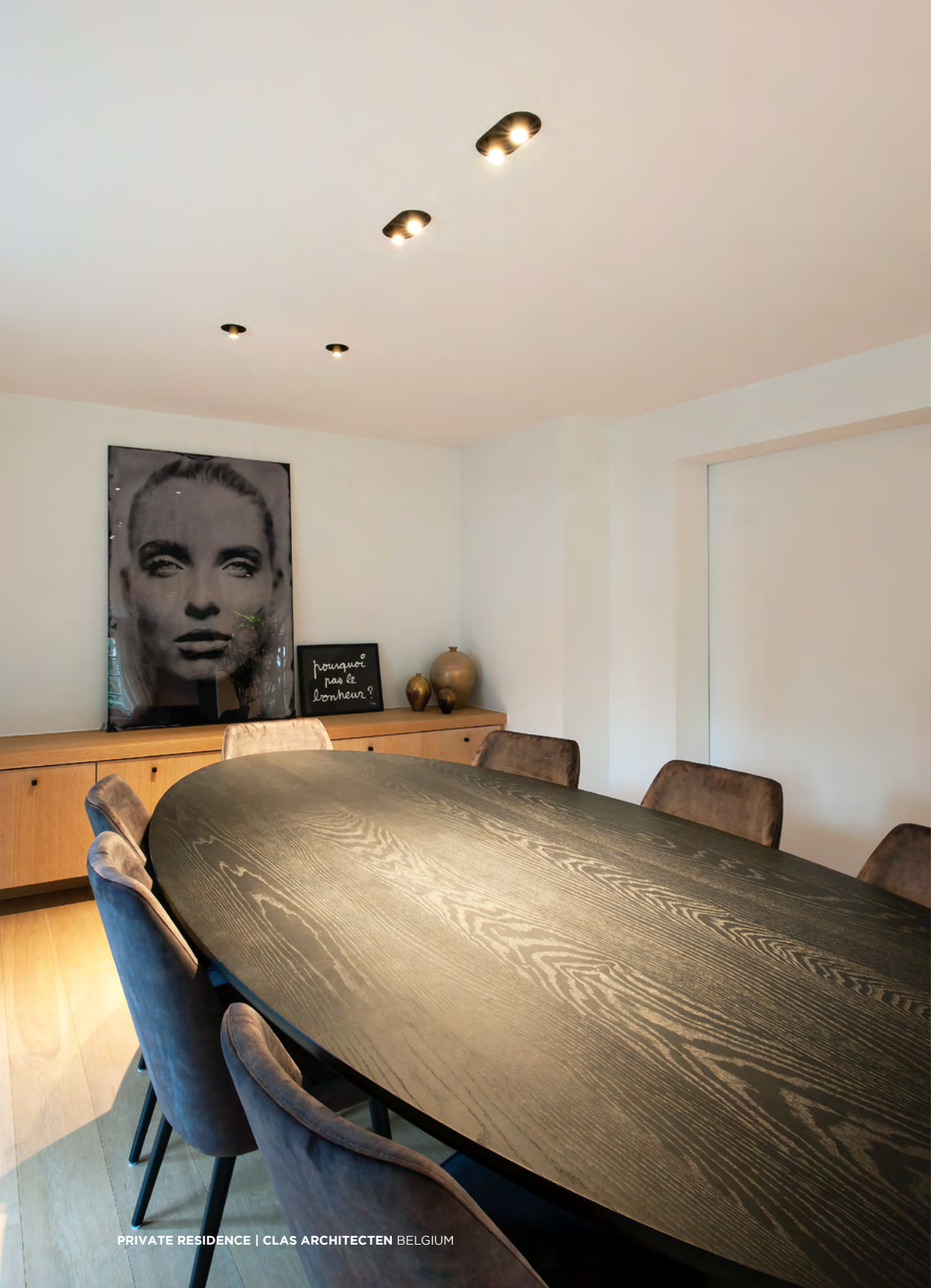

PRIVATE RESIDENCE | CLAS ARCHITECTEN BELGIUM

BLIEK ROUND petit

CEILING RECESSED









low recessed depth



honeycomb



IC rated

OPTIONAL

honeycomb louver

	CODE
	90051130
	90051131

1.0

LED COB 7W | 700mA | 8V
excl. driver
aluminium powder coated

IP20 0°-60°|355° 35° SDCM2 L70|60K 0.20kg

wire springs 86-89 60 4-23

	CODE
	164361W_
	164361K_
	164361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	445	>90	3
3000K	470	>90	5
2000-3000K|12V	440	>95	9

ALWAYS USE

driver | 700mA

	CODE
10W dim	90225402
10W DALI	90245401

more options and specs on page 726

2.0

2x LED COB 7W | 700mA | 17V
excl. driver
aluminium powder coated

IP20 0°-60°|355° 35° SDCM2 L70|60K 0.40kg

wire springs 87x176 60 4-23

	CODE
	164261W_
	164261K_
	164261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x445	>90	3
3000K	2x470	>90	5

ALWAYS USE

driver | 700mA | only 1x needed

	CODE
15W dim	90225502
35W DALI	90245801

more options and specs on page 727



BLIEK ROUND

CEILING RECESSED











IC rated





1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-60°|355° 36° SDCM2 L80|50K 0.45kg

wire springs 127 75 min 4

	CODE
	125361W_
	125361K_
	125361B_

blade springs 127 75 min 4

	CODE
	125361W_C
	125361K_C
	125361B_C

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	540/735 | >90	3
3000K	585/785 | >90	5
4000K	625/840 | >90	7
2000-3000K|12V	390/580 | >95	9

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-60°|350° 0.42kg

wire springs 127 75 min 4

	CODE
	125120W0
	125120K0
	125120B0

blade springs 127 min 4

	CODE
	125120W0C
	125120K0C
	125120B0C

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

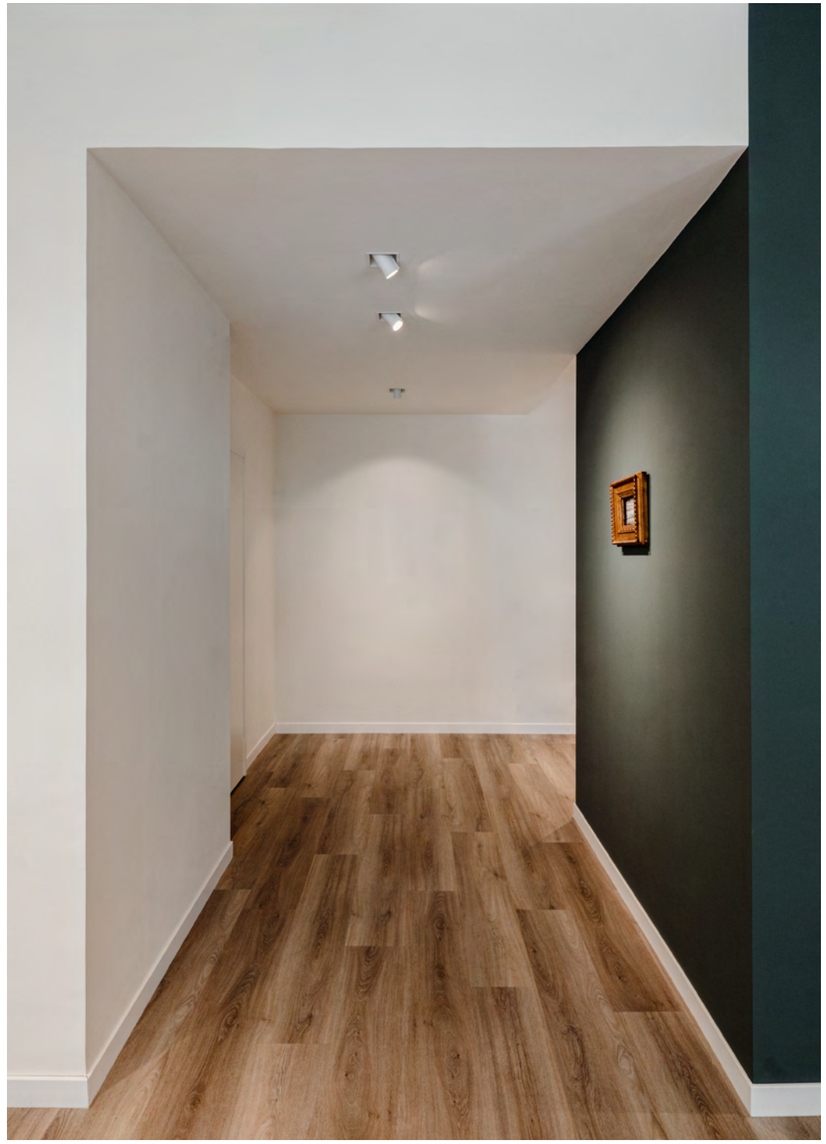







BLIEK SQUARE

CEILING RECESSED





1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP20 0°-60°|355° 36° SDCM2 L80|60K 0.47kg

wire springs 111x111 75 4-25

	CODE
	125461W_
	125461B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	540/735 | >90	3
3000K	585/785 | >90	5
4000K	625/840 | >90	7
2000-3000K|12V	390/580 | >95	9

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-60°|350° 0.45kg

wire springs 111x111 75 4-25

	CODE
	125220W0
	125220B0

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

20 Years Replaceability

IC rated



EETCAFÉ DEN OS | MARKEY & SCHELSTRATE NUKERKE | BELGIUM

RUVI

CEILING RECESSED





1.0

LED G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium powder coated

IP20 0.25kg

54-56 90 7-33

	CODE
	1671E0B0

OPTIONAL

G95 5.5W | E27 | phase-cut dim
filament | gold mirror

	CODE
2200K | 377lm	9003E156
2700K | 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
filament | silver mirror

	CODE
2700K | 464lm	9003E157

G95 5.4W | E27 | phase-cut dim
filament | gold tinted

	CODE
2200K | 380lm	9003E111

more lamps and specs on page 732

back

THEY'RE FUN TO BATHE WITH

SCARED OF WATER? NO WAY!

Keep knocking on the bathroom door all you want, IP44 luminaires will be in no hurry to leave, even less with IP65. Luminaires with the IP44 certification are protected against splashes and those with IP65 are resistant to water jets. They're every bit as comfortable in a SPA as they are above a shower. Don't have much space? Then choose a version with a low installation depth. They fit well in rooms with low ceiling heights as well, making even the smallest hotel bathrooms shine. By the way, many types of IP44 or IP65 luminaires are not only available as spots but in many more varieties, too.

WASSERSCHEU? VON WEGEN!

Eines ist sicher: Bei IP44-Leuchten kann man lange an die Badezimmertür klopfen – die kommen nicht raus. Bei IP65-Leuchten noch länger. Schließlich sind Leuchten mit der Zertifizierung IP44 optimal vor Spritzwasser und mit IP65 sogar vor einem Wasserstrahl geschützt. Und fühlen sich daher im SPA-Bereich genau so wohl, wie über der Dusche. Sie haben nur wenig Platz? Dann sind Versionen mit geringer Einbautiefe die perfekte Lösung. Sie passen auch in Räume mit niedriger Raumhöhe und bringen so selbst das kleinste Hotelbadezimmer zum Strahlen. Übrigens: IP44- oder IP65 Leuchten sind natürlich nicht nur als Spots, sondern auch in vielen anderen Ausführungen erhältlich.

DEEP BIJOU IP65	p. 205
DEEP IP44 | IP65	p. 207
DEEPER IP44	p. 209
TAIO IP65	p. 213
LUNA ROUND IP44	p. 215
RINI SNEAK IP44	p. 217
LUNA SQUARE IP44	p. 219
PLANO IP44	p. 221
MIRBI IP44	p. 223
CITY IP44	p. 225
ROB IP44	p. 305
ROBY IP44	p. 307
TOWNA IP44	p. 309
MIRBA IP44	p. 577
MIRBI LONG IP44	p. 579

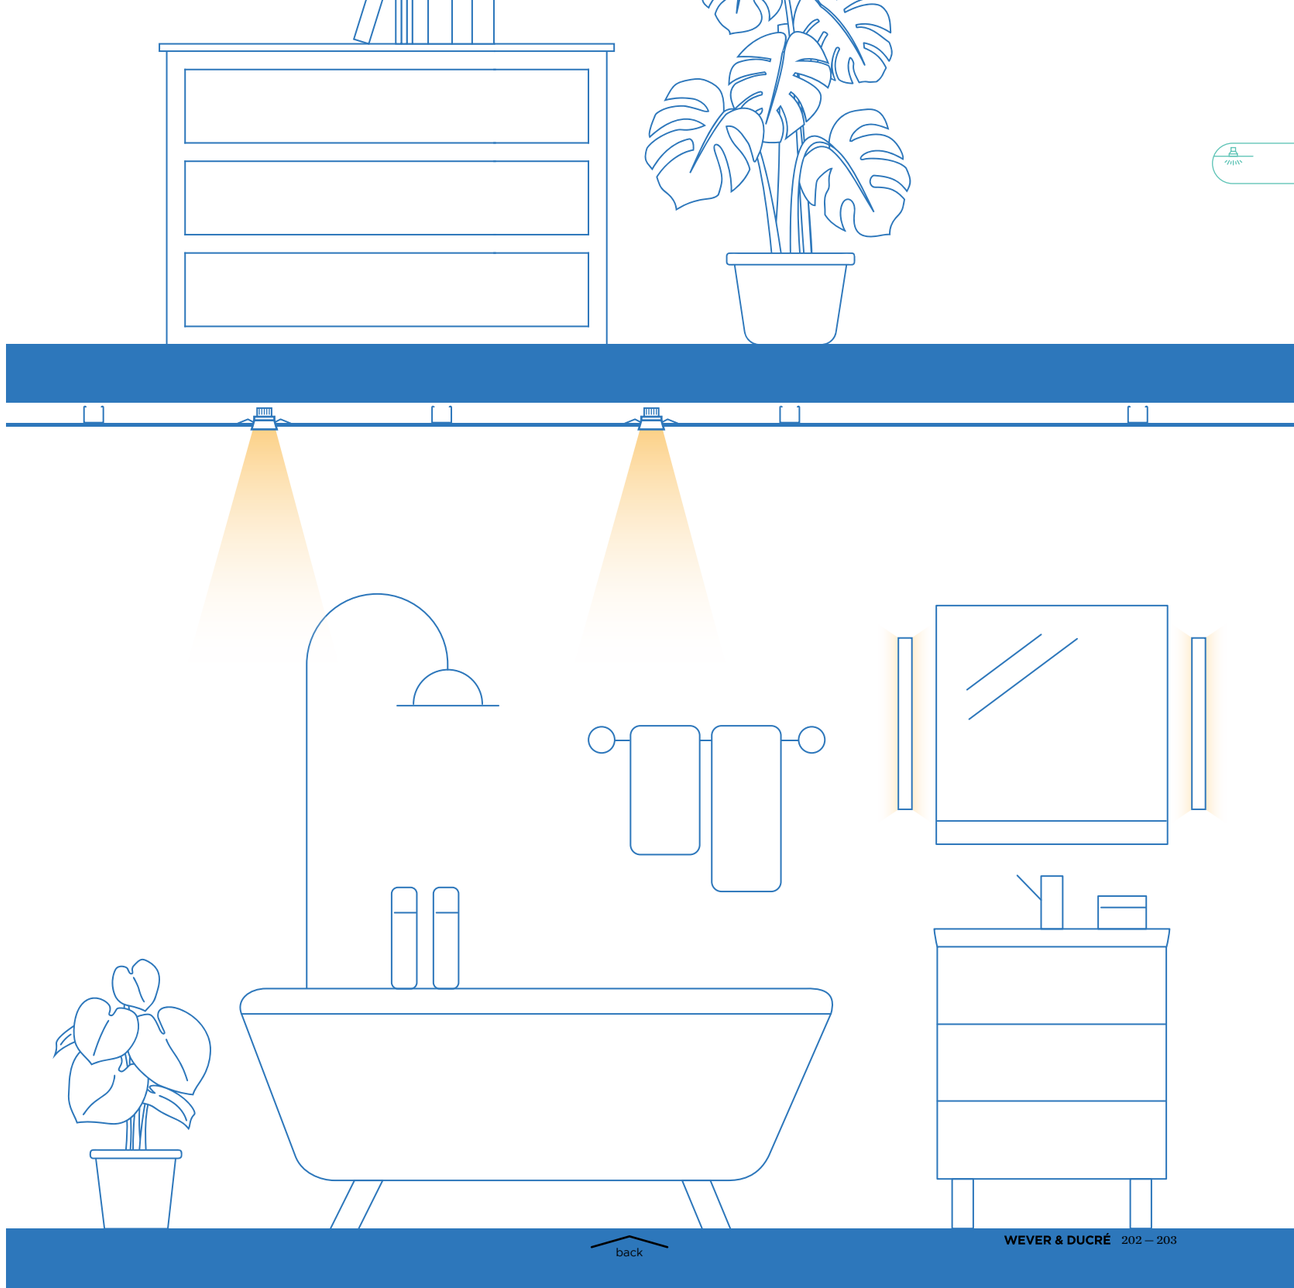







DEEP bijou IP65

CEILING RECESSED



1.0

LED COB 5W | 500mA | 8V
excl. driver
aluminium powder coated

IP65 30° SDCM2 L80|50K 0.09kg

wire springs 50-52 85 4-25

	CODE
	165361W_
	165361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	470	>90	3
3000K	495	>90	5



IC rated

ALWAYS USE

driver | 500mA

	CODE
6.5W | IP20 dim	90224301
7W | IP67	90214301

more drivers on page 724

585



PRIVATE RESIDENCE | ANKER & CO DENMARK





IC rated only
LED version

DEEP IP44 | IP65

CEILING RECESSED







1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP65 36° SDCM2 L80|50K 0.24kg

wire springs 86-89 90 4-27

	CODE
	184161W_
	184161B_

blade springs 86-89 90 min 4

	CODE
	184161W_C
	184161B_C

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	485/640 | >90	3
3000K	510/690 | >90	5

ALWAYS USE

driver | 500mA

	CODE
10W | IP20	90214405
10W | IP20 dim	90224402
24W | IP68	90214702

more options and specs on page 725

1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP44 0.26kg

wire springs 86-89 90 4-25

	CODE
	112610W0
	112610B0

blade springs 86-89 90 min 8

	CODE
	112610W0C
	112610B0C

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 727

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP44 0.30kg

wire springs 86-89 105 4-25

	CODE
	112620W0
	112620B0

blade springs 86-89 105 min 8

	CODE
	112620W0C
	112620B0C

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

585

back



PRIVATE RESIDENCE | ANKER & CO DENMARK

DEEPER IP44

CEILING RECESSED











1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP44 36° SDCM2 L80|50K 0.17kg

wire springs 76-79 95 4-38

	CODE
	152461W_
	152461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	440/600	>90	3
3000K	480/645	>90	5
2000-3000K|12V	320/470	>95	9

ALWAYS USE

driver | 500mA

	CODE
10W | IP20	90214405
10W | IP20 dim	90224402
24W | IP68	90214702

more options and specs on page 725

1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP44 0.11kg

wire springs 76-79 100 4-38

	CODE
	152210W0
	152210B0

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 727

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP44 0.15kg

wire springs 76-79 115 4-38

	CODE
	152220W0
	152220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

20 Years Replaceability

back



HOTEL THE KRANE | ARCGENCY BY MADS MØLLER | ANKER & CO COPENHAGEN | DENMARK

back



PRIVATE RESIDENCE AUSTRIA







TAIO IP65

CEILING RECESSED



1.0

LED COB 6/9W | 350/500mA | 18V
excl. driver
aluminium powder coated
opal glass convex lens

IP65 105° SDCM2 L80|50K 0.13kg

wire springs 70 70 4-27

	CODE
	180781W_
	180781G_
	180781B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	250/350 | >90	3
3000K	270/380 | >90	5

ALWAYS USE

driver | 500mA

	CODE
10W | IP20	90214405
10W | IP20 dim	90224402
24W | IP68	90214702

more options and specs on page 725



IC rated

back





311



587



597



631









low recessed
depth only for
LED HV version

LUNA ROUND IP44

CEILING RECESSED







1.0 LED HV

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
opal PMMA cover

IP44 SDCM2 L80|50K 0.18kg

blade springs 76-79 50 8-15

3000K | CRI >90 | 350lm

	CODE
	114888W5
	114888B5

OPTIONAL

phase-cut | bluetooth dimmer

	CODE
	90019100

specs on page 729

1.0 MR16

QR-CBC51 max.10W | GU5.3 | 12V
excl. driver
aluminium | polyamide
opal glass cover

IP44 0.28kg

blade springs 76-83 100 min 4

	CODE
	114810W0
	114810B0

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 727

OPTIONAL

	CODE
plasterkit	90017101

1.0 PAR16

PAR16 max. 10W | GU10
100-240VAC | 50-60Hz
aluminium | polyamide
opal glass cover

IP44 0.24kg

blade springs 76-83 120 min 4

	CODE
	114820W0
	114820B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

OPTIONAL

	CODE
plasterkit	90017101

back



PRIVATE RESIDENCE BELGIUM

RINI SNEAK IP44

CEILING RECESSED







1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP44 36° SDCM2 L80|50K 0.18 kg

wire springs 76-79 46 4-25

	CODE
	154461W_
	154461B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	465/625 | >90	3
3000K	505/675 | >90	5
2000-3000K|12V	335/495 | >95	9

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP44 0.12 kg

wire springs 76-79 55 4-25

	CODE
	154210W0
	154210B0

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 727



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP44 0.16 kg

wire springs 76-79 80 4-25

	CODE
	154220W0
	154220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731





low recessed
depth only for
LED version

back



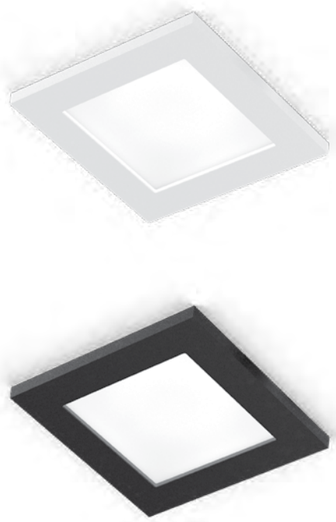



low recessed
depth only for
LED HV version

LUNA SQUARE IP44

CEILING RECESSED



1.0 LED HV

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
opal PMMA cover

IP44 SDCM2 L80|50K 0.19kg

blade springs 72x72 50 8-15

3000K | CRI >90 | 350lm

	CODE
	114988W5
	114988B5

OPTIONAL

phase-cut | bluetooth dimmer

CODE
90019100

specs on page 729



1.0 MR16

QR-CBC51 max. 10W | GU5.3 | 12V
excl. driver
aluminium | polyamide
opal glass cover

IP44 0.28kg

wire springs 76x76 100 8-15

	CODE
	114910W0
	114910B0

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 727

OPTIONAL

	CODE
plasterkit	90017102



1.0 PAR16

PAR16 max. 10W | GU10
100-240VAC | 50-60Hz
aluminium | polyamide
opal glass cover

IP44 0.26kg

wire springs 76x76 120 8-15

	CODE
	114920W0
	114920B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

OPTIONAL

	CODE
plasterkit	90017102



PRIVATE RESIDENCE | STUDIO BENOIT BELGIUM

PLANO IP44

CEILING RECESSED











1.0 LED

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP44 36° SDCM2 L80|50K 0.21kg

wire springs 74x78 90 4-30

	CODE
	118861W_
	118861B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	510/695	>90	3
3000K	550/740	>90	5
2000-3000K|12V	365/535	>95	9

1.0 MR16

QR-CBC51 max. 35W | GU5.3 | 12V
excl. driver
aluminium powder coated

IP44 0.15kg

wire springs 74x78 115 4-30

	CODE
	118410W0
	118410B0

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP44 0.19kg

wire springs 74x78 115 4-30

	CODE
	118420W0
	118420B0

20 Years Replaceability

ALWAYS USE

driver | 500mA

	CODE
10W	90214405
10W dim	90224402
20W DALI	90244604

more options and specs on page 725

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701
70W dim	90221904

specs on page 727

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

back



OFFICE VIENNA | AUSTRIA

MIRBI IP44

CEILING RECESSED





313





579

1.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
clear + opal PMMA cover

IP44 SDCM2 L70|60K 0.24kg

blade springs 76-79 50 8-15

3000K | CRI >90 | 510lm

CODE
17548805

2.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
clear + opal PMMA cover

IP44 SDCM2 L70|60K 0.26kg

blade springs 72x72 50 2-25

3000K | CRI >90 | 510lm

CODE
17558805



low recessed
depth

OPTIONAL

phase-cut | bluetooth dimmer

CODE
90019100

specs on page 729

OPTIONAL

phase-cut | bluetooth dimmer

CODE
90019100

specs on page 729

back



HOTEL MARTIN'S RENTMEESTERIJ | PCP ARCHITECTS BILZEN | BELGIUM

CITY IP44

CEILING RECESSED





ø210



ø305



low recessed depth

1.6

LED LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L70|60K 0.64 kg

wire springs 202-205 50 4-22

3000K | CRI >90 | 1100lm

	CODE
	115484W5
	115484B5

2.6

LED LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L70|60K 1.05 kg

wire springs 297-300 50 4-22

3000K | CRI >90 | 1740lm

	CODE
	115584W5
	115584B5

back

CEILING SURFACE

226 – 313

CEILING SURFACE SPOTLIGHTS



RAY MINI
229



RAY
231



BOX MINI
237



BOX
239



DOCUS MINI
245



DOCUS
247



HEXO MINI
251



HEXO
253



PIRRO SPOT 4.1
257



PIRRO SPOT 4.0
259



PIRRO OPAL
261



SOLID PETIT 1.0
263



SOLID PETIT 2.0
263



SOLID
267



SIRRO
271



PLANO PETIT
275



PLANO
279



SARA ON BASE
281



SQUBE ON BASE
283



MATCH
289



CENO
291



CENO 4.1
293



MICK
295

CEILING SURFACE LUMINAIRES



CLEA
299



CLOCK
301



VENN
303

CEILING SURFACE IP-RATED

ROB IP44
305

ROBY IP44
307



TOWNA IP44
309

TAIO IP65
311

MIRBI IP44 1.0
313



MIRBI IP44 2.0
313

DESIGNER FAMILIES



ROOMOR OFFICE
33



MIRRO
53

DRO
69



WIRO
113



J.J.W.
123

back



HOTEL MARTIN'S RENTMEESTERIJ | PCP ARCHITECTS BILZEN | BELGIUM

RAY mini

CEILING SURFACE







335





501

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.14kg

	CODE
	258220W0
	258220G0
	258220Q0
	258220B0



inner reflector

OPTIONAL

inner reflector max. 10W
wet painted polycarbonate

	CODE
	900199W4
	900199G4
	900199Q4
	900199B4

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

		CODE
	2700K | 460lm	901228W3
	2700K | 437lm	901228B3
	3000K | 500lm	901228W5
	3000K | 457lm	901228B5

more lamps and specs on page 731

back



HOTEL MÜHLE | ARCHITECT DI RAINER SCHÖPF OBERGURGL | AUSTRIA

RAY

CEILING SURFACE







1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 32° SDCM2 L70|50K 0.70kg

phase-cut dim

	CODE
	186764W_
	186764L_
	186764G_
	186764Q_
	186764P_
	186764B_

DALI dim | 10W

	CODE
	186765W_
	186765L_
	186765G_
	186765Q_
	186765P_
	186765B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	580 | >80	2
3000K	610 | >80	4
2000-3000K*	715 | >95	9

*only for phase-cut dim

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.61kg

	CODE
	146720W0
	146720L0
	146720G0
	146720Q0
	146720P0
	146720B0



inner cover

OPTIONAL

inner cover max. 10W
aluminium powder coated brushed

	CODE
	911041W1
	911041G1
	911041B1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

377 | 389
411
503
599
633

back



MAISON ME BOUTIQUE HOTEL | ARCHITECT ALICE PIUBELLO BARDOLINO LAKE GARDA | ITALY

HAVE A LOOK
weverducre.com/universal-stars-configurator

MIX AND MATCH

THE MAGIC CUBE

Remember that small magic cube we just couldn't put down in the 80s? Then you will love BOX. It has an almost infinite number of variations for you to try – not just in terms of colour and size. BOX is incredibly flexible when it comes to insets and lamps. Grab a double espresso and start mixing and matching. Not really into cubes? Then try taking a fantastic HEXO, DOCUS, or RAY luminaire home with you. Use our online configurator to put it together exactly how you like it.

Können Sie sich noch an den magischen kleinen Würfel erinnern, den wir in den 80ern einfach nicht aus der Hand legen konnten? Dann werden Sie BOX lieben. Denn auch mit ihr lassen sich nahezu unendlich viele Varianten durchprobieren. Und das nicht nur in puncto Farben und Größe. Auch bei Insets und Leuchtmitteln ist BOX mehr als nur flexibel. Also einfach einen doppelten Espresso schnappen und loskombinieren. Würfel sind nicht so Ihr Ding? Dann können Sie sich mit HEXO, DOCUS oder RAY auch andere tolle Leuchtenformen dieser Serie nach Hause holen. Und sie sich mit unserem Online-Konfigurator gleich selbst zusammenstellen.

SHADE COLOUR

INNER REFLECTOR COLOUR

INNER COVER COLOUR



BOX MINI
GOLD INNER REFLECTOR



BOX MINI
WITHOUT INSET



WITHOUT
INSET



BLACK
INNER COVER



GOLD
INNER COVER



WHITE
INNER REFLECTOR



BLACK
INNER REFLECTOR



GOLD
INNER REFLECTOR

back











BOX mini

CEILING SURFACE





337





509

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.16kg



inner reflector

CODE

	258120W0
	258120G0
	258120Q0
	258120B0

OPTIONAL

inner reflector max. 10W
wet painted polycarbonate

CODE

	900199W1
	900199G1
	900199Q1
	900199B1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE

2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

back



PRIVATE RESIDENCE | SUÑER ARQUITECTOS SPAIN













BOX

CEILING SURFACE





1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 32° SDCM2 L70|50K 0.74kg



inner reflector



inner cover

OPTIONAL

inner reflector max. 10W
wet painted polycarbonate

	CODE
	911211W1
	911211G1
	911211B1

inner cover max. 10W
aluminium powder coated brushed

	CODE
	911011W1
	911011G1
	911011B1

phase-cut dim

	CODE
	186164W_
	186164L_
	186164G_
	186164Q_
	186164P_
	186164B_

DALI dim | 10W

	CODE
	186165W_
	186165L_
	186165G_
	186165Q_
	186165P_
	186165B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	540 | >80	2
3000K	560 | >80	4
2000-3000K*	715 | >95	9

*only for phase-cut dim

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.66kg

	CODE
	146120W0
	146120L0
	146120G0
	146120Q0
	146120P0
	146120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

back

413
511
605
649





LAMOTE STRAGIER ADVOCATEN | ADINS VAN LOOVEREN ARCHITECTEN KORTRIJK | BELGIUM

BOX

CEILING SURFACE

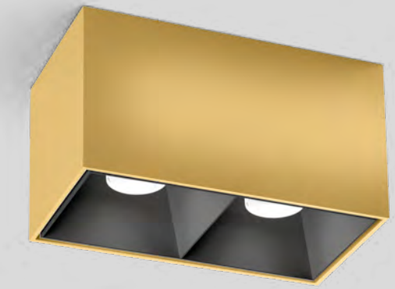







inner reflector



inner cover

OPTIONAL

double inner reflector max. 10W
wet painted polycarbonate

	CODE
	911251W1
	911251G1
	911251B1

inner cover max. 10W
aluminium powder coated brushed
2 pieces needed

	CODE
	911011W1
	911011G1
	911011B1

2.0 LED

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 32° SDCM2 L70|50K 1.08kg

	CODE
	186264W_
	186264L_
	186264G_
	186264Q_
	186264P_
	186264B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x540 | >80	2
3000K	2x560 | >80	4
2000-3000K	2x715 | >95	9

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 1.13kg

	CODE
	146220W0
	146220L0
	146220G0
	146220Q0
	146220P0
	146220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

back



OFFICE INARTO | INARTO ARCHITECTEN HERENTALS | BELGIUM







DOCUS mini

CEILING SURFACE





339





517

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0.16kg

	CODE
	258320W0
	258320G0
	258320B0



inner reflector

OPTIONAL

inner reflector max. 10W
wet painted polycarbonate

	CODE
	900199W2
	900199G2
	900199B2

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

back



SHOP | ZANOTTI PANE DOLCE E CAFFÈ | FLUSSOCREATIVO DESIGN STUDIO TRAVAGLIATO | ITALY











DOCUS

CEILING SURFACE









1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 32° SDCM2 L70|50K 0.63kg

phase-cut dim

	CODE
	186364W_
	186364L_
	186364G_
	186364P_
	186364B_

DALI dim | 10W

	CODE
	186365W_
	186365L_
	186365G_
	186365P_
	186365B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	540 | >80	2
3000K	560 | >80	4
2000-3000K*	715 | >95	9

*only for phase-cut dim

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.55kg

	CODE
	146320W0
	146320L0
	146320G0
	146320P0
	146320B0



inner cover

OPTIONAL

inner cover max. 10W
aluminium powder coated brushed

	CODE
	911021W1
	911021G1
	911021B1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

back

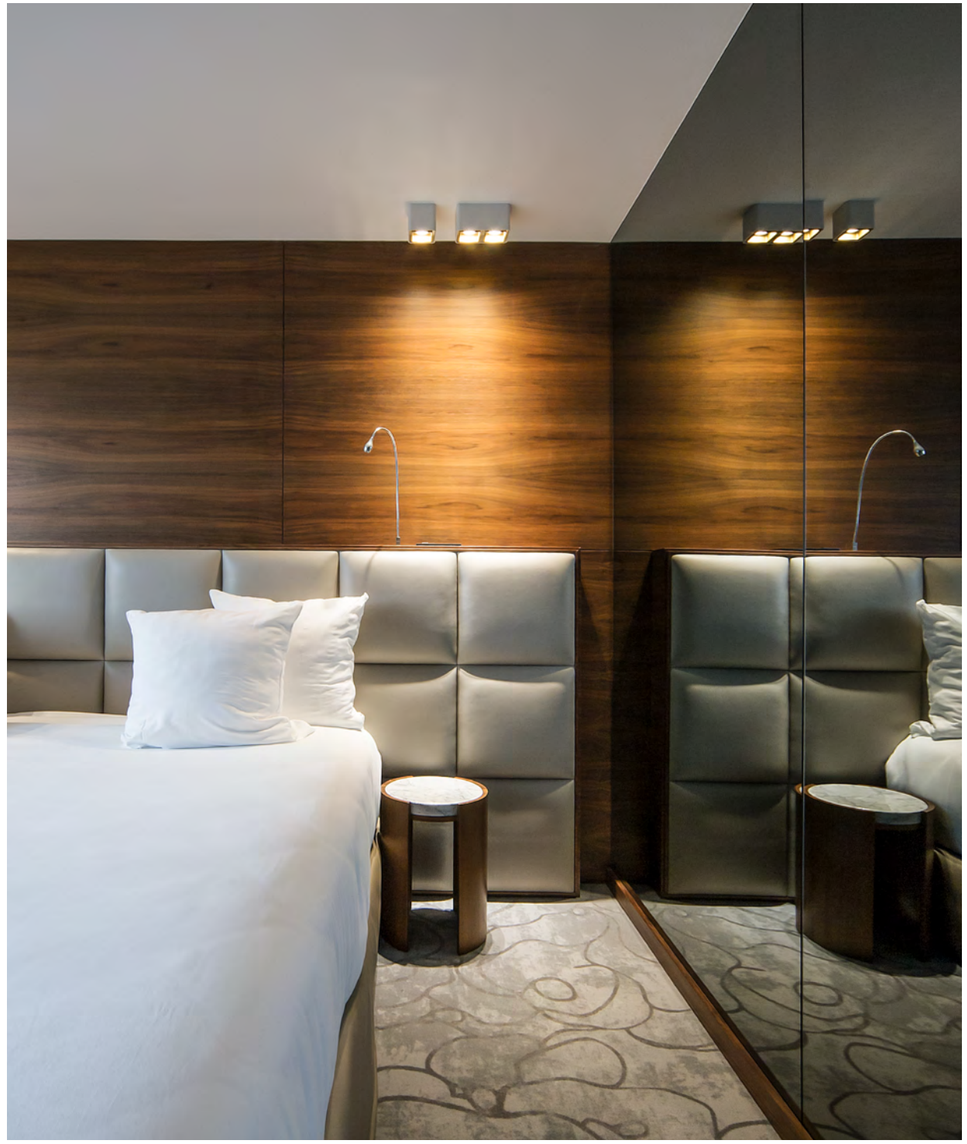

HOTEL HOWARD | ROQUE INTÉRIEURS PARIS | FRANCE

DOCUS

CEILING SURFACE







2.0 LED

LED 2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 32° SDCM2 L70|50K 0.92kg

	CODE
	186464W_
	186464L_
	186464G_
	186464P_
	186464B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x540 | >80	2
3000K	2x560 | >80	4
2000-3000K	2x715 | >95	9

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 1.01kg

	CODE
	146420W0
	146420L0
	146420G0
	146420P0
	146420B0



inner cover

OPTIONAL

inner cover max. 10W
aluminium powder coated brushed
2 pieces needed

	CODE
	911021W1
	911021G1
	911021B1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

back











HEXO mini

CEILING SURFACE





341



82

81



519

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.15kg



inner reflector

	CODE
	258420W0
	258420G0
	258420Q0
	258420B0

OPTIONAL

inner reflector max. 10W
wet painted polycarbonate

	CODE
	900199W3
	900199G3
	900199Q3
	900199B3

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

PRIVATE RESIDENCE | *NESS DESIGN STUDIO HUNGARY

back



PRIVATE RESIDENCE | CONCEPT'N BELGIUM









HEXO

CEILING SURFACE







1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 32° SDCM2 L70|50K 0.72kg

phase-cut dim

	CODE
	186564W_
	186564G_
	186564Q_
	186564P_
	186564B_

DALI dim | 10W

	CODE
	186565W_
	186565G_
	186565Q_
	186565P_
	186565B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	540 | >80	2
3000K	560 | >80	4
2000-3000K*	715 | >95	9

*only for phase-cut dim

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 0.63kg

	CODE
	146520W0
	146520G0
	146520Q0
	146520P0
	146520B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731



inner cover

OPTIONAL

inner cover max. 10W
aluminium powder coated brushed

	CODE
	911031W1
	911031G1
	911031B1

back



PRIVATE RESIDENCE | HELLE FLOU DENMARK

HEXO

CEILING SURFACE







2.0 LED

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 32° SDCM2 L70|50K 1.13kg

	CODE
	186664W_
	186664G_
	186664Q_
	186664P_
	186664B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x540 | >80	2
3000K	2x560 | >80	4
2000-3000K	2x715 | >95	9

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed lacquered

IP20 1.19kg

	CODE
	146620W0
	146620G0
	146620Q0
	146620P0
	146620B0



inner cover

OPTIONAL

inner cover max. 10W
aluminium powder coated brushed
2 pieces needed

	CODE
	911031W1
	911031G1
	911031B1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 729

back



PRIVATE RESIDENCE GERMANY

PIRRO SPOT

CEILING SURFACE







165





367 | 399



E



J



K



B







honeycomb

OPTIONAL

honeycomb louver

	CODE
	90051130
	90051131

1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 32° SDCM2 L80|50K 0.20kg

	CODE
	151164E_
	151164J_
	151164K_
	151164B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	380	>90	3
3000K	405	>90	5

4.1

LED 4x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 32° SDCM2 L80|50K 0.50kg

	CODE
	151564E_
	151564J_
	151564K_
	151564B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x380	>90	3
3000K	4x405	>90	5

back



PIRRO SPOT

CEILING SURFACE





165

367 | 399



E



J



K



B



honeycomb

OPTIONAL

honeycomb louver

	CODE
	90051130
	90051131



2.0

LED 2x LED COB 5W | phase-cut dim 220-240VAC | 50-60Hz | incl. driver aluminium powder coated

IP20 32° SDCM2 L80|50K 0.30kg

	CODE
	151264E_
	151264J_
	151264K_
	151264B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x380 | >90	3
3000K	2x405 | >90	5



4.0

LED 4x LED COB 5W | phase-cut dim 220-240VAC | 50-60Hz | incl. driver aluminium powder coated

IP20 32° SDCM2 L80|50K 0.48kg

	CODE
	151464E_
	151464J_
	151464K_
	151464B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	4x380 | >90	3
3000K	4x405 | >90	5



6.0

LED 6x LED COB 5W | phase-cut dim 220-240VAC | 50-60Hz | incl. driver aluminium powder coated

IP20 32° SDCM2 L80|50K 0.80kg

	CODE
	151664E_
	151664J_
	151664K_
	151664B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	6x380 | >90	3
3000K	6x405 | >90	5

back



SHOWROOM QSINE KNOKKE | BELGIUM

PIRRO OPAL

CEILING SURFACE









367 | 399





2.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover

IP20 95° SDCM3 L80|50K 0.30kg

	CODE
	151284E_
	151284J_
	151284K_
	151284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	240	>90	3
3000K	260	>90	5

4.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover

IP20 95° SDCM3 L80|50K 0.52kg

	CODE
	151484E_
	151484J_
	151484K_
	151484B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	550	>90	3
3000K	580	>90	5



spot height
80 mm



opal height
65 mm

back



PRIVATE RESIDENCE BELGIUM

SOLID petit

CEILING SURFACE











W



K



J



B



H





1.0 LED

LED COB 6W | phase-cut dim
220-240V | 50-60Hz | incl. driver
aluminium powder coated

IP20 32° SDCM2 L80|50K 0.32kg

	CODE
	133864W_
	133864J_
	133864H_
	133864K_
	133864B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	325	>90	3
3000K	340	>90	5

2.0 LED

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-25°| 355° 34° SDCM2 L80|50K 0.42kg

	CODE
	133964W_
	133964J_
	133964H_
	133964K_
	133964B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>90	3
3000K	570	>90	5
2000-3000K	440	>95	9

back





RELESYS I LOBO-LAB ARCHITECTS I ANKER & CO COPENHAGEN | DENMARK

SOLID

CEILING SURFACE









1.0 LED

LED COB 12W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-25°|355° 36° SDCM2 L80|50K 0.65kg

phase-cut dim

	CODE
	133764W_
	133764J_
	133764H_
	133764K_
	133764P_
	133764Q_
	133764B_

DALI dim

	CODE
	133765W_
	133765J_
	133765H_
	133765K_
	133765P_
	133765Q_
	133765B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	745 | >90	3
3000K	800 | >90	5
2000-3000K	560 | >95	9

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-25°|355° 0.6lkg

	CODE
	133120W0
	133120J0
	133120H0
	133120K0
	133120P0
	133120Q0
	133120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

back









FAIR BOOTH | BIS BEURS | GINO VANHOUTTE GENT | BELGIUM

SIRRO

CEILING SURFACE





1.0 LED

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 0.85kg

	CODE
	189164W_
	189164E_
	189164B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	715	>90	3
3000K	775	>90	5
2000-3000K	560	>95	9



LED version with
light spill effect



PAR16



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 0.81kg

	CODE
	139120W0
	139120E0
	139120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

back



OFFICE | DEUTSCHE WOHNWERTE | BRANDHERM + KRUMREY HAMBURG HEIDELBERG | GERMANY

SIRRO

CEILING SURFACE



2.0 LED

LED 2x LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-35°|355° 36° SDCM2 L80|50K 1.57kg

	CODE
	189264W_
	189264E_
	189264B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x715 | >90	3
3000K	2x775 | >90	5
2000-3000K	2x560 | >95	9



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 1.51kg

	CODE
	139220W0
	139220E0
	139220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731



3.0 PAR16

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-35°|355° 1.51kg

	CODE
	139320W0
	139320E0
	139320B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731



PRIVATE RESIDENCE SWEDEN

PLANO petit

CEILING SURFACE

171









1.0 LED

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-25°|355° 34° SDCM2 L80|50K 0.48kg

	CODE
	162564W_
	162564E_
	162564CH_
	162564B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>90	3
3000K	570	>90	5
2000-3000K	440	>95	9

2.0 LED

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-25°|355° 34° SDCM2 L80|50K 0.61kg

	CODE
	162664W_
	162664E_
	162664CH_
	162664B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x540	>90	3
3000K	2x570	>90	5
2000-3000K	2x440	>95	9

back



PRIVATE RESIDENCE SWEDEN

PLANO petit

CEILING SURFACE



171



3.0 LED

LED 3x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-25°|355° 34° SDCM2 L80|50K 0.73kg

	CODE
	162764W_
	162764E_
	162764CH_
	162764B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	3x540 | >90	3
3000K	3x570 | >90	5
2000-3000K	3x440 | >95	9

back



PRIVATE RESIDENCE GERMANY

PLANO

CEILING SURFACE

173





1.0 LED

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-30°|355° 36° SDCM2 L80|50K 1.15kg

	CODE
	118564W_
	118564E_
	118564CH_
	118564B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	685 | >90	3
3000K	740 | >90	5
2000-3000K	535 | >95	9



2.0 LED

2x LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-30°|355° 36° SDCM2 L80|50K 1.62kg

	CODE
	118664W_
	118664E_
	118664CH_
	118664B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x685 | >90	3
3000K	2x740 | >90	5
2000-3000K	2x535 | >95	9



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-30°|355° 1.39kg

	CODE
	118520W0
	118520E0
	118520CH0
	118520B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-30°|355° 1.51kg

	CODE
	118620W0
	118620E0
	118620CH0
	118620B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

back



RIVER STONE | ZOOI INTERIOR STUDIO KIEV | UKRAINE

SARA on base

CEILING SURFACE











1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90° 0.23kg

	CODE
	157220W0
	157220G0
	157220K0
	157220B0

1.1 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90°|330° 0.32kg

	CODE
	157420W0
	157420K0
	157420B0

3.0 PAR16

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90°|330° 0.74kg

	CODE
	157520W0
	157520K0
	157520B0



K

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731





361



529

back



PRIVATE RESIDENCE BELGIUM

SQUBE on base

CEILING SURFACE







PAR16



LED





365 | 381







1.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90° 39° SDCM2 L70|50K 0.43kg

	CODE
	144268W_
	144268B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	415	>80	2
3000K	430	>80	4
1800-3000K	350	>80	9

OPTIONAL

phase-cut | bluetooth dimmer

CODE
90019100

specs on page 729

2.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90° SDCM2 L70|50K 0.44kg

	CODE
	144468W_
	144468B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K | 32°	711	>80	2
3000K | 32°	790	>80	4
1800-3000K | 58°	790	>80	9

OPTIONAL

phase-cut | bluetooth dimmer

CODE
90019100

specs on page 729

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90° 0.43kg

	CODE
	144220W0
	144220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

back



PRIVATE RESIDENCE | MOOSEBERRY DESIGN GROUP UKRAINE

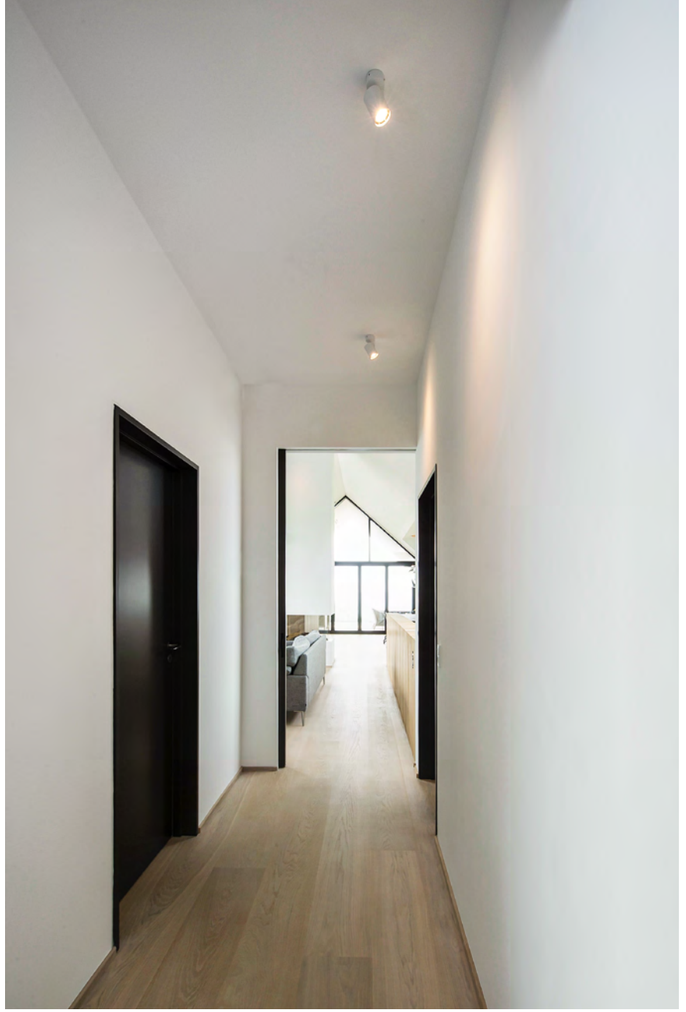

PRIVATE RESIDENCE | LINK ARCHITECTURE | ANKER & CO DENMARK

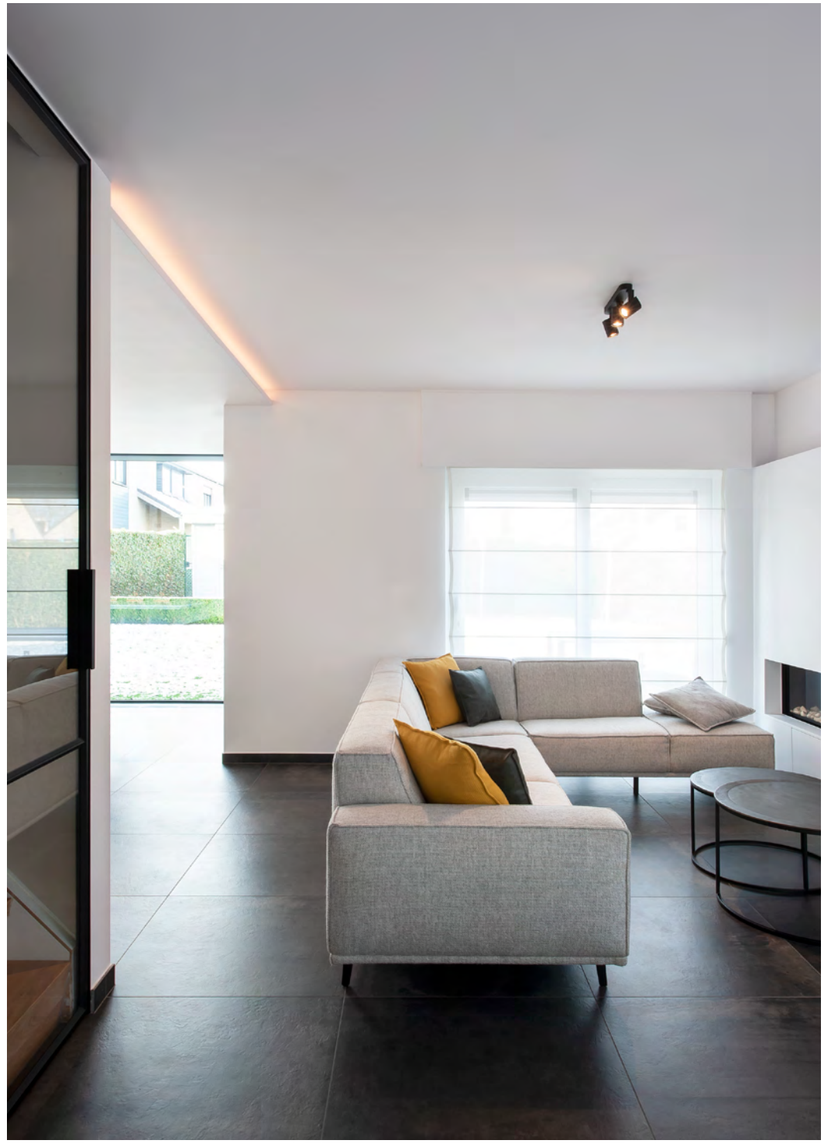

PRIVATE RESIDENCE | LANCO DESIGN BELGIUM

SQUBE on base

CEILING SURFACE

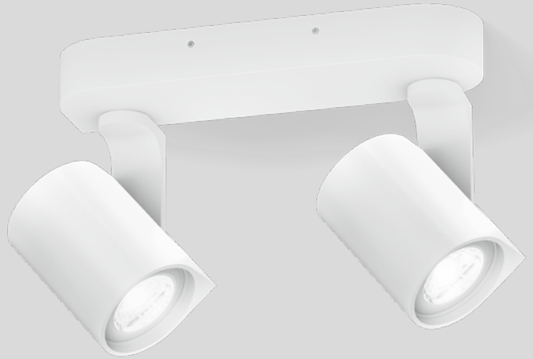





2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90°|355° 0.58kg

	CODE
	144520W0
	144520B0

3.0 PAR16

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP20 0°-90°|355° 0.93kg

	CODE
	144620W0
	144620B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

back



PRIVATE RESIDENCE | CLAS ARCHITECTEN BELGIUM

MATCH

CEILING SURFACE





187

325

533





1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-90°|350° 25° SDCM2 L80|50K 0.40kg

	CODE
	177154W_
	177154B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	510	>90	5

2.0

LED 2x LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-90°|350° 25° SDCM2 L80|50K 0.42kg

	CODE
	177254W_
	177254B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x480	>90	3
3000K	2x510	>90	5

back



PRIVATE RESIDENCE GERMANY

CENO

CEILING SURFACE





As awarded by The Chicago Athenaeum: Museum of Architecture and Design



189





327 | 387



W



Q



K



B



honeycomb

OPTIONAL

honeycomb louver

	CODE
	90051130
	90051131



1.0

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed lacquered

IP20 0°-90°|350° 35° SDCM2 L70|60K 0.20kg

	CODE
	176664W_
	176664Q_
	176664K_
	176664B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	440 | >90	3
3000K	470 | >90	5



2.0

2x LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed lacquered

IP20 0°-90°|350° 35° SDCM2 L70|60K 0.43kg

	CODE
	176764W_
	176764Q_
	176764K_
	176764B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x440 | >90	3
3000K	2x470 | >90	5

back



PRIVATE RESIDENCE AUSTRIA

CENO

CEILING SURFACE





189





327 | 387



W



Q



K



B







honeycomb

OPTIONAL

honeycomb louver

	CODE
	90051130
	90051131

4.0

LED 4x LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed lacquered

IP20 0°-90°|350° 35° SDCM2 L70|60K 0.95kg

	CODE
	176864W_
	176864Q_
	176864K_
	176864B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x440	>90	3
3000K	4x470	>90	5

4.1

LED 4x LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed lacquered

IP20 0°-90°|350° 35° SDCM2 L70|60K 0.80kg

	CODE
	176964W_
	176964Q_
	176964K_
	176964B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x440	>90	3
3000K	4x470	>90	5

back



SHOP AUSTRIA

MICK

CEILING SURFACE



As awarded by The Chicago Athenaeum: Museum of Architecture and Design

reddot winner 2020
lighting design

331

535







J



K

1.0

LED LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-90°|350° 18° SDCM2 L80|60K 0.35kg

	CODE
	159144J_
	159144K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	435	>90	5

2.0

LED 2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-90°|350° 18° SDCM2 L80|50K 0.62kg

	CODE
	159244J_
	159244K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x225	>90	3
3000K	2x245	>90	5



HOTEL VIENNA | AUSTRIA

▶ **DESIGN WITH LOVE**

back



CLEA

CEILING SURFACE





W



SG



FJ



B



1.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 0.78kg

	CODE
	181184W_
	181184SG_
	181184FJ_
	181184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	810	>90	3
3000K	835	>90	5



2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 1.31kg

	CODE
	181284W_
	181284SG_
	181284FJ_
	181284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	810	>90	3
3000K	835	>90	5



3.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 2.09kg

	CODE
	181384W_
	181384SG_
	181384FJ_
	181384B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	810	>90	3
3000K	835	>90	5

555

back



PRIVATE RESIDENCE AUSTRIA

CLOCK

CEILING SURFACE



557



1.0

LED LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 0.66kg

	CODE
	182184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	855	>90	3
3000K	880	>90	5



2.0

LED LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 0.76kg

	CODE
	182384B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	855	>90	3
3000K	880	>90	5



3.0

LED LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 1.00kg

	CODE
	182484B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	855	>90	3
3000K	880	>90	5

back



OFFICE | RPD | VIVA ARCHITECTURE ANTWERPEN | BELGIUM

VENN

CEILING SURFACE

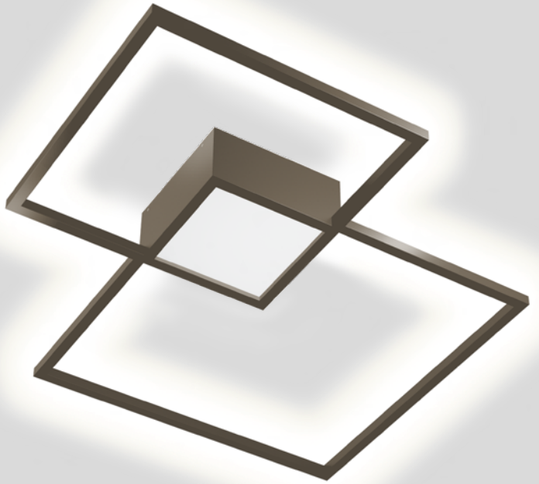





1.0

LED PCB 38W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover indirect light

IP20 SDCM3 L80|60K 2.50kg

	CODE
	149184W_
	149184Q_
	149184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2950	>80	2
3000K	3140	>80	4

2.0

LED PCB 47W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover dir./indir. light

IP20 SDCM3 L80|60K 2.50kg

	CODE
	149284W_
	149284Q_
	149284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540/2950	>80	2
3000K	580/3140	>80	4

MORE OPTIONS
weverducre.com/venn-configurator

571

S&R CORNELISSEN

back



GAW HOPPEHOF ERTVELDE | BELGIUM

ROB IP44

CEILING SURFACE







ø160



ø260



ø350





609

1.6

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L80|60K 0.70kg

CODE 701188W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1130	>90	3
3000K	1150	>90	5

2.6

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L80|60K 1.20kg

CODE 701288W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1800	>90	3
3000K	1810	>90	5

3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L80|60K 1.90kg

CODE 701388W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3340	>90	3
3000K	3360	>90	5

OPTIONAL

phase-cut | bluetooth dimmer

CODE 90019100

specs on page 729

back



ORL PRAXIS SEMADENI | EMULSION INNENARCHITEKTUR CHUR | SWITZERLAND

ROBY IP44

CEILING SURFACE











1.6

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L70|60K 1.00kg

	CODE
	135188W_
	135188B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1050	>90	3
3000K	1060	>90	5

2.6

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L70|60K 1.55kg

	CODE
	135288W_
	135288B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1670	>90	3
3000K	1680	>90	5

3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L70|60K 2.45kg

	CODE
	135388W_
	135388B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3090	>90	3
3000K	3100	>90	5

OPTIONAL

phase-cut | bluetooth dimmer

CODE
90019100

specs on page 729

back



PRIVATE RESIDENCE | LEIBEZ INTERIEUR AUSTRIA

TOWNA IP44

CEILING SURFACE



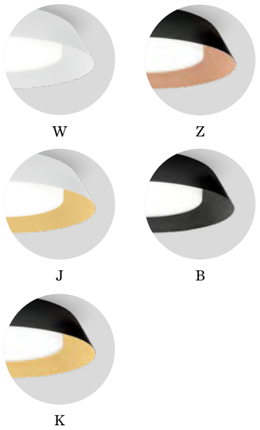

OPTIONAL

phase-cut | bluetooth dimmer

CODE
90019100

specs on page 729



1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel wet painted
opal PMMA cover

IP44 SDCM2 L80|60K 1.15kg

CODE
178188W_
178188J_
178188K_
178188Z_
178188B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1030	>90	3
3000K	1050	>90	5



2.0

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel wet painted
opal PMMA cover

IP44 SDCM2 L80|60K 1.90kg

CODE
178288W_
178288J_
178288K_
178288Z_
178288B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1650	>90	3
3000K	1660	>90	5



3.0

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel wet painted
opal PMMA cover

IP44 SDCM2 L80|60K 3.00kg

CODE
178388W_
178388J_
178388K_
178388Z_
178388B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3050	>90	3
3000K	3060	>90	5

back



PRIVATE RESIDENCE AUSTRIA

TAIO IP65

CEILING SURFACE





W



A



Q



B

back



107

ø80

1.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal glass convex lens

IP65 105° SDCM2 L80|50K 0.55kg

	CODE
	180884W_
	180884A_
	180884Q_
	180884B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	410 | >90	3
3000K	440 | >90	5

213
587
597
631



PRIVATE RESIDENCE | IMORE INTERIEURARCHITECTUUR BELGIUM

MIRBI IP44

CEILING SURFACE





223

579





1.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
clear + opal PMMA cover

IP44 SDCM2 L70|60K 0.4kg

3000K | CRI >90 | 510lm

	CODE
	175488W5
	175488E5

2.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
clear + opal PMMA cover

IP44 SDCM2 L70|60K 0.5kg

3000K | CRI >90 | 510lm

	CODE
	175588W5
	175588E5

back

TRACKS | SYSTEMS

STREX SYSTEM



48V TRACKS
319



MATCH
325



CENO
327



MICK
331



RAY MINI
335



BOX MINI
337



DOCUS MINI
339



HEXO MINI
341



OPAL LIGHT MODULE
343



DOTS LIGHT MODULE
343



ODREY
345



STUBE
353



SOLLI
355

1-PHASE TRACK



1-PHASE TRACKS
359



SARA
361



SQUBE
365



PIRRO
367



DRO
369



ODREY
371



RAY
377



HEXO
377

3-PHASE TRACK



3-PHASE TRACKS
379



SQUBE
381



CENO FORT
387



RAY
389



HEXO
389

ELLO SYSTEM



ELLO SYSTEM
391

PIRRO SYSTEM



PIRRO SYSTEM
397

ILANE



ILANE
401

ON THE RIGHT TRACK

THREE WAYS TO MAKE THEM SHINE

It's normal to go off the rails when it comes to tracks. That's why we need a quick introduction. You can essentially choose between three options. The simplest is the 1-phase track. This system controls light sources from one point and switches them all on and off together. You'd prefer to operate each luminaire individually? Then we recommend the 3-phase track, where spotlights, insets and suspended luminaires are connected and controlled separately. The 48-volt system is new in the range. It allows spotlights and suspended luminaires, and also various sets of spots and opal insets for general lighting, to be inserted with ease. This means you can always react flexibly to changes in the room. The system can be easily controlled by your smartphone, which is especially practical.

Dass man bei Schienen erst mal Bahnhof versteht, ist ganz normal. Deshalb gibt's hier eine schnelle Einführung: Grundsätzlich können Sie zwischen drei Möglichkeiten wählen. Die einfachste ist die 1-Phasen-Schiene, bei der alle Lichtquellen von einem Punkt aus angesteuert und zusammen ein- und ausgeschaltet werden. Sie möchten Ihre Leuchten einzeln bedienen? Dann empfiehlt sich eine 3-Phasen-Schiene, bei der Strahler, Insets und Hängeleuchten separat angeschlossen und gesteuert werden. Neu im Programm: Das 48-Volt-System. Mit ihm lassen sich nicht nur Strahler oder Hängeleuchten, sondern auch verschiedene Spots- und Opalinsets – zur Allgemeinbeleuchtung – ganz einfach einsetzen. So kann jederzeit flexibel auf Veränderungen im Raum reagiert werden. Besonders praktisch: Das System lässt sich ganz bequem vom Smartphone aus steuern.

HAVE A LOOK
weverducre.com/strex-configurator

	STREX TRACK SYSTEM 48V DALI | p. 319	1-PHASE TRACK 220–240V | p. 359	3-PHASE TRACK 220–240V | p. 379
1 CHOOSE YOUR MOUNTING	 recessed · surface · suspended · suspended indirect light	 recessed · surface · suspended	 surface · suspended
2 COMBINE IT WITH DIFFERENT INSETS			
3 INSTALL IT IN YOUR FAVOURITE LAYOUT			

For more support and an extended layout of track systems, please check our FAQ section at weverducre.com/faq

back





custom cut
available

more on page 739 and
weverducre.com/strex-custom



RECESSED

track 48V | 15A | DALI

SELV

		CODE
	1m	90014187
	1m	90014188
	2m	90014189
	2m	90014190
	3m	90014191
	3m	90014192

RECESSED EXAMPLES

configure your own STREX SYSTEM online at
weverducre.com/strex-configurator



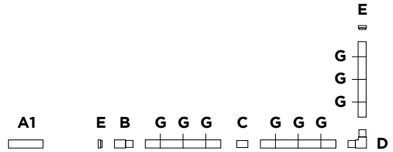



A1 | DRIVER

remote converter | 220-240VAC
50-60Hz | 48V | for connection to
power feed

	CODE
100W | 48V	90218901
150W | 48V	90218902

for DALI SELV solution see page 739



B | POWER FEED

48V | 15A | DALI | end/middle power
feed | max. 4 x 1.5mm²

	CODE
	90014153
	90014154



C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CODE
	90014196
	90014197



D | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right

	CODE
	90014251
	90014252

for 4 corner O shape, refer to mounting
instructions or online configurator



E | END CAP

	CODE
	90014149
	90014150



F | WIRELESS CASAMBI CONTROL

8W | adapter for wireless control
of 64 fixtures in max. 8 groups

	CODE
	90014155
	90014156



G | MOUNTING BRACKET

recessed mounting bracket

31-33 65 5-25

	CODE
	90014193

for 1.0m - 2pcs needed
for 2.0m - 4pcs needed
for 3.0m - 6pcs needed

back





custom cut
available

more on page 739 and
weverducre.com/strex-custom



SURFACE

track 48V | 15A | DALI

SELV

		CODE
	1m	90014181
	1m	90014182
	2m	90014183
	2m	90014184
	3m	90014185
	3m	90014186



B | POWER FEED

48V | 15A | DALI | end/middle power feed | max. 4 x 1.5mm²

	CODE
	90014153
	90014154

SURFACE EXAMPLES

configure your own STREX SYSTEM online at
weverducre.com/strex-configurator

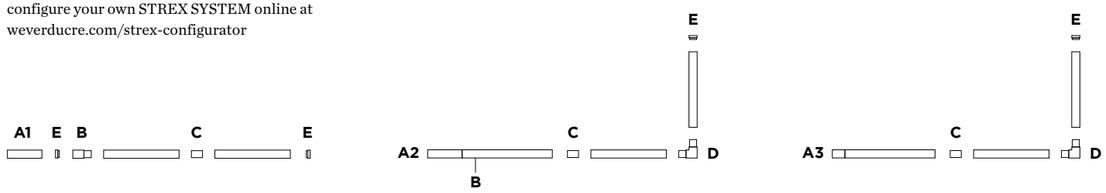



A1 | REMOTE DRIVER

220-240VAC | 50-60Hz | 48V
for connection to power feed

	CODE
100W | 48V	90218901
150W | 48V	90218902

for DALI SELV solution see page 739



A2 | IN LINE DRIVER

profile box incl. driver
220-240VAC | 50-60Hz | 48V
incl. DALI through wiring
for connection to power feed



		CODE
	100W	90014166
	100W	90014167
	150W	90014170
	150W	90014171



A3 | IN TRACK DRIVER

with in line connection box
including power feed
220-240VAC | 50-60Hz | 48V

		CODE
	100W	90014178
	100W	90014176



		CODE
	250W	90014179
	250W	90014177



A4 | IN TRACK DRIVER

with in track connection
including power feed
220-240VAC | 50-60Hz | 48V

		CODE
	100W	90014144
	100W	90014143



		CODE
	250W	90014146
	250W	90014145



C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CODE
	90014196
	90014197



D | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right

	CODE
	90014198
	90014199

for 4 corner O shape, refer to mounting
instructions or online configurator



E | END CAP

	CODE
	90014147
	90014148



F | WIRELESS CASAMBI CONTROL

8W | adapter for wireless control
of 64 fixtures in max. 8 groups

	CODE
	90014155
	90014156

back



SUSPENDED EXAMPLES

configure your own STREX SYSTEM online at
weverducre.com/strex-configurator









A1 | IN LINE DRIVER

profile box incl. driver
220-240VAC | 50-60Hz | 48V
incl. DALI through wiring for
connection to power feed
suspended in line with profile

220-240V DALI SELV IN — 48V DALI SELV OUT

CODE

	100W	90014260
	100W	90014261
	150W	90014262
	150W	90014263



C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

CODE

		90014196
		90014197



A2 | CEILING DRIVER

ceiling box incl. driver
220-240VAC | 50-60Hz | 48V
incl. DALI through wiring
for connection to power feed

220-240V DALI SELV IN — 48V DALI SELV OUT

CODE

	100W	90014168
	100W	90014169
	150W	90014172
	150W	90014173



D | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right

CODE

		90014198
		90014199

for 4 corner O shape, refer to mounting
instructions or online configurator



A3 | IN TRACK DRIVER

including power feed
220-240VAC | 50-60Hz | 48V
incl. 3m power cable

CODE

	100W	90014157
	100W	90014174



CODE

	250W	90014158
	250W	90014175



E | END CAP

CODE

		90014147
		90014148



B | POWER FEED

48V | 15A | DALI | end/middle power
feed | max. 4 x 1.5mm²

CODE

		90014153
		90014154



F | WIRELESS CASAMBI CONTROL

8W | adapter for wireless control
of 64 fixtures in max. 8 groups

CODE

		90014155
		90014156



SUSPENDED

track 48V | 15A | DALI

SELV

CODE

	1m	90014181
	1m	90014182
	2m	90014183
	2m	90014184
	3m	90014185
	3m	90014186



SUSP. INDIRECT LIGHT

track 48V | 15A | DALI | with indirect
light | 3.0m suspension sets already
included

SELV

3000K | >90 CRI | 1900lm

CODE

	2m	900140W5
	2m	900140B5

3000K | >90 CRI | 2850lm

CODE

	3m	900141W5
	3m	900141B5



G | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket | not
needed for indirect light version

stainless steel colour

CODE

	1.5m	90014160
	3m	90014161

black colour

CODE

	1.5m	90014274
	3m	90014275

for 1m - 2pcs needed
for 2m - 3pcs needed
for 3m - 4pcs needed

custom cut
available

more on page 739 and
weverducre.com/strex-custom

back



SHOWROOM OSINE KNOKKE | BELGIUM

MATCH on track

STREX 48V SYSTEM





1.0

LED COB 8W | 48V
aluminium powder coated
PC adapter

IP20 0-90°|360° 25° SDCM2 L80|50K 0.14kg



W



B

non dim

	CODE
	179152W_
	179152B_

DALI dim

	CODE
	179155W_
	179155B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	535 | >90	3
3000K	550 | >90	5

accessories on page 739

back



FORUM ADVOCATEN | VRV ARCHITECTEN ANTWERP | BELGIUM

CENO on track

STREX 48V SYSTEM

189

291









W



K



B



honeycomb

OPTIONAL

honeycomb louver

	CODE
	90051130
	90051131

1.0

LED COB 8W | 48V
aluminium powder coated
PC adapter

IP20 0-90°|360° 35° SDCM2 L70|60K 0.1kg

non dim

	CODE
	166562W_
	166562K_
	166562B_

DALI dim

	CODE
	166565W_
	166565K_
	166565B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	450 | >90	3
3000K	470 | >90	5

accessories on page 739

2.0

LED 2x LED COB 8W | 48V
aluminium powder coated
PC adapter

IP20 0-90°|360° 35° SDCM2 L70|60K 0.19kg

non dim

	CODE
	166662W_
	166662K_
	166662B_

DALI dim

	CODE
	166665W_
	166665K_
	166665B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x450 | >90	3
3000K	2x470 | >90	5

accessories on page 739

back





PRIVATE RESIDENCE BELGIUM

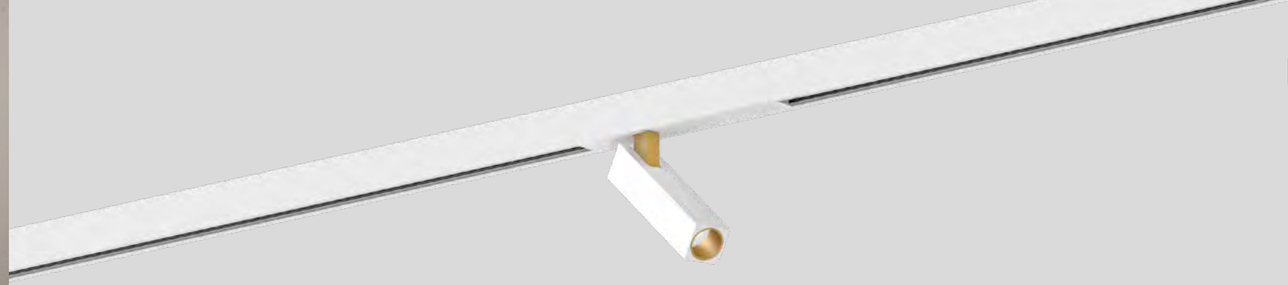

MICK on track

STREX 48V SYSTEM

reddot winner 2020
lighting design

DESIGN AWARD 2021













J



K

1.0

LED COB 12W | 48V
aluminium powder coated
PC adapter

IP20 0-90°|360° 18° SDCM2 L80|50K 0.22kg

non dim

	CODE
	159442J_
	159442K_

DALI dim

	CODE
	159445J_
	159445K_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	325 | >90	3
3000K	355 | >90	5

accessories on page 739

2.0

2x LED COB 11W | 48V
aluminium powder coated
PC adapter

IP20 0-90°|360° 18° SDCM2 L80|50K 0.44kg

non dim

	CODE
	159542J_
	159542K_

DALI dim

	CODE
	159545J_
	159545K_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x325 | >90	3
3000K	2x355 | >90	5

accessories on page 739

S&R CORNELISSEN

back





OFFICE GERMANY

RAY mini on track

STREX 48V SYSTEM





229







501



W



J



E



G



GB



Q



BQ



K



B

only for ceiling surface and suspended tracks

back

1.0

LED COB 7W | 48V
aluminium powder coated
brushed wet painted

IP20 SDCM2 L70|50K 0.16kg

Adapter | 2700K | CRI >90 | 440lm

	CODE
	258262W_3
	258262B_3
DALI	258265W_3
DALI	258265B_3

Adapter | 3000K | CRI >90 | 470lm

	CODE
	258262W_5
	258262B_5
DALI	258265W_5
DALI	258265B_5

housing | inner reflector colour

CODE	
	W
	J
	E
	G
	GB
	Q
	BQ
	K
	B

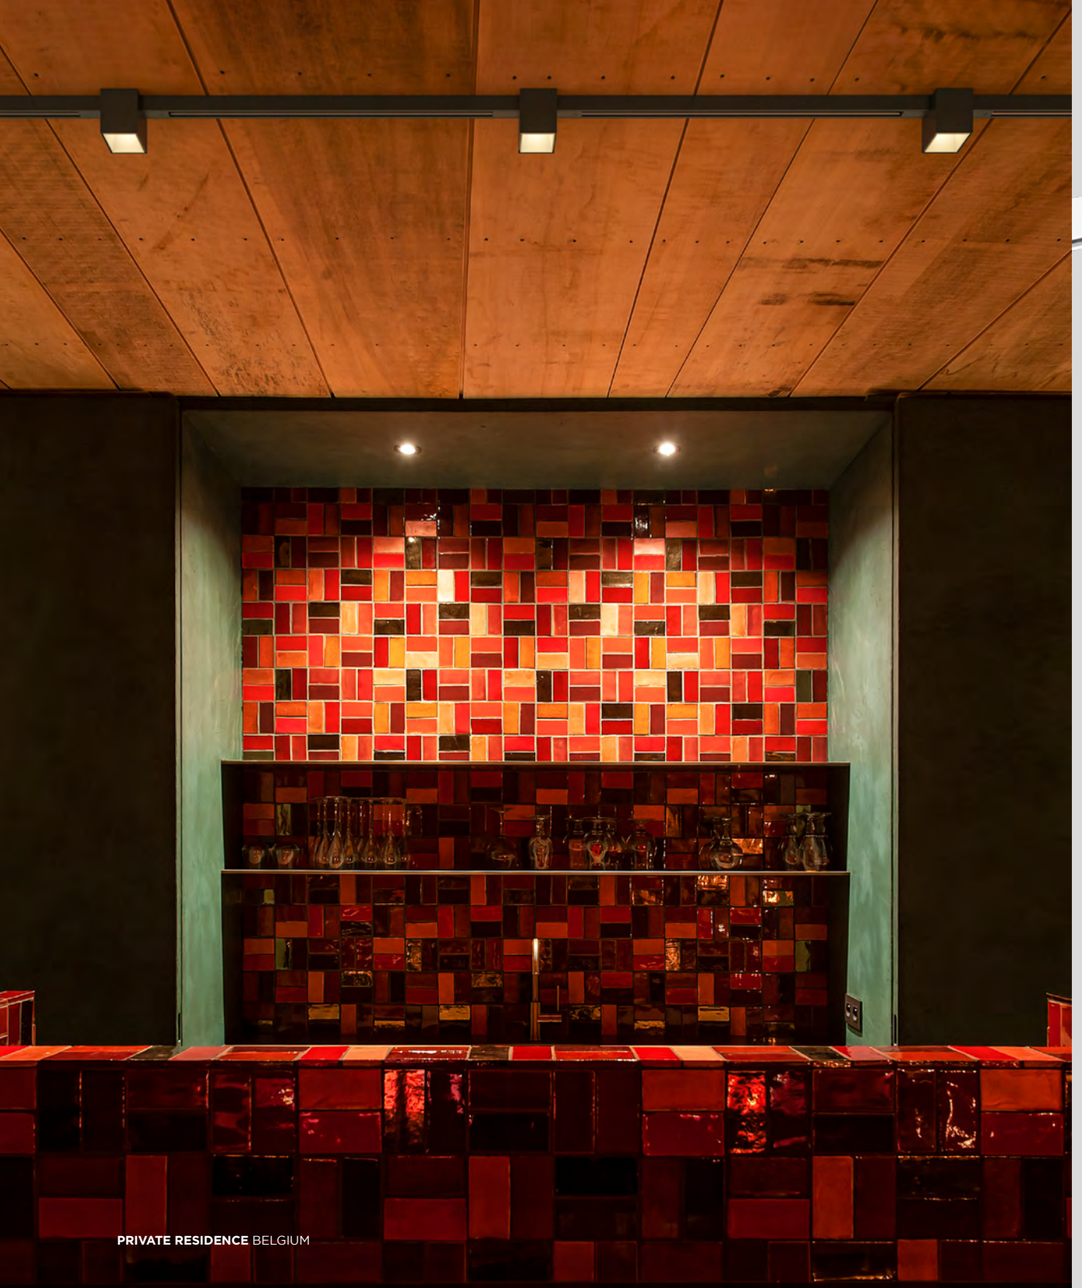

PRIVATE RESIDENCE BELGIUM

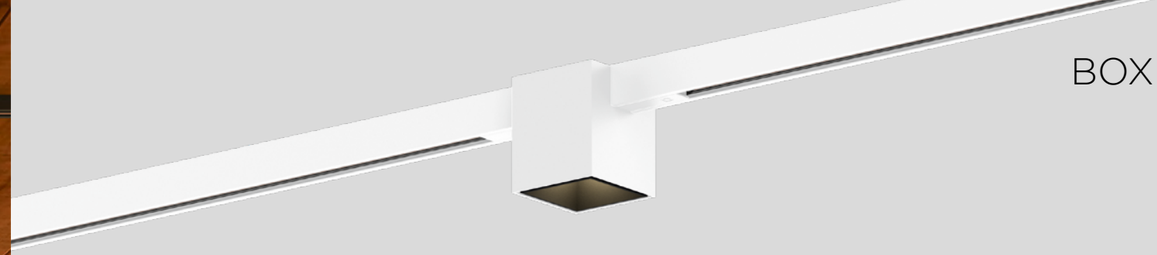

BOX mini on track

STREX 48V SYSTEM

237

509



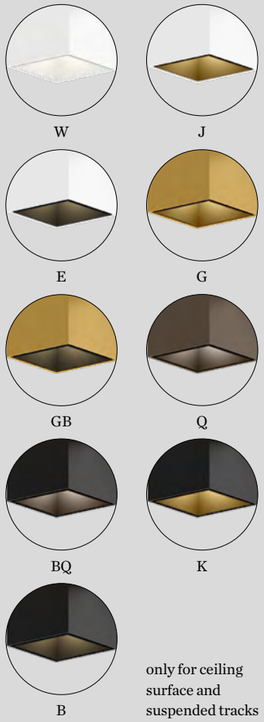

only for ceiling surface and suspended tracks

1.0

LED COB 7W | 48V
aluminium powder coated
brushed wet painted

IP20 SDCM2 L70|50K 0.20kg

Adapter | 2700K | CRI >90 | 440lm

	CODE
	258162W_3
	258162B_3
DALI	258165W_3
DALI	258165B_3

Adapter | 3000K | CRI >90 | 470lm

	CODE
	258162W_5
	258162B_5
DALI	258165W_5
DALI	258165B_5

housing | inner reflector colour

CODE
W
J
E
G
GB
Q
BQ
K
B

back



PRIVATE RESIDENCE SPAIN



DOCUS mini on track

STREX 48V SYSTEM



245





1.0

LED COB 7W | 48V
aluminium powder coated
brushed wet painted

IP20 SDCM2 L70|50K 0.18kg



517



W



J



E



BQ



K



B

only for ceiling
surface and
suspended tracks

Adapter | 2700K | CRI >90 | 440lm

	CODE
	258362W_3
	258362B_3
DALI	258365W_3
DALI	258365B_3

Adapter | 3000K | CRI >90 | 470lm

	CODE
	258362W_5
	258362B_5
DALI	258365W_5
DALI	258365B_5

housing | inner reflector colour

	CODE
	W
	J
	E
	BQ
	K
	B

back



PRIVATE RESIDENCE | CHANTAL MEIER ARCHITEKTUR SWITZERLAND

HEXO mini on track

STREX 48V SYSTEM









1.0

LED LED COB 7W | 48V
aluminium powder coated
brushed wet painted

IP20 SDCM2 L70|50K 0.18kg




W


J


E


Q


BQ


K


B

only for ceiling surface and suspended tracks

Adapter | 2700K | CRI >90 | 440lm

		CODE
		258462W_3
		258462B_3
	DALI	258465W_3
	DALI	258465B_3

Adapter | 3000K | CRI >90 | 470lm

		CODE
		258462W_5
		258462B_5
	DALI	258465W_5
	DALI	258465B_5

housing | inner reflector colour

CODE
W
J
E
Q
BQ
K
B

back



FORUM ADVOCATEN | VRV ARCHITECTEN ANTWERP | BELGIUM

STREX MODULE

48V SYSTEM









1.0 DOT

LED PCB 9W | 48V
PC adapter | cover
PC lens

IP20 24° UGR≤19 SDCM3 L70|60K 0.11kg

non dim

	CODE
	171342W_
	171342B_

DALI dim

	CODE
	171345W_
	171345B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	660	>90	3
3000K	735	>90	5

1.0 OPAL

LED PCB 12W | 48V
PC adapter | cover
PMMA opal cover

IP20 SDCM3 L70|60K 0.16kg

non dim

	CODE
	171382W_
	171382B_

DALI dim

	CODE
	171385W_
	171385B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610	>90	3
3000K	630	>90	5

2.0 OPAL

LED PCB 24W | 48V
PC adapter | cover
PMMA opal cover

IP20 SDCM3 L70|60K 0.32kg

non dim

	CODE
	171482W_
	171482B_

DALI dim

	CODE
	171485W_
	171485B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1225	>90	3
3000K	1265	>90	5



dot



opal

back

ODREY on track

48V SYSTEM



MORE COMBINATIONS
weverducre.com/odrey-configurator
or contact customer service

1.1

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 32° SDCM2 L70|60K 0.28kg

	CODE
	187165WW_
	187165GG_
	187165BB_
	187165WG_
	187165BG_
	187165GB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5

1.2

LED COB 8W | 48V | DALI dim
aluminium wet painted | shade
matching inner cover included
PC adapter

IP20 32° SDCM2 L70|60K 0.48kg

	CODE
	187265WW_
	187265GG_
	187265BB_
	187265WG_
	187265BG_
	187265GB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5



1.3

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 32° SDCM2 L70|60K 0.27kg

	CODE
	187365WW_
	187365GG_
	187365BB_
	187365WG_
	187365BG_
	187365GB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5

437
495
back

ODREY on track

48V SYSTEM





MORE COMBINATIONS
weverducre.com/odrey-configurator
or contact customer service



1.4

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 32° SDCM2 L70|60K 0.32kg

	CODE
	187465WW_
	187465GG_
	187465BB_
	187465WG_
	187465BG_
	187465GB_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	485 | >90	3
3000K	505 | >90	5



1.5

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 32° SDCM2 L70|60K 0.37kg

	CODE
	187565WW_
	187565GG_
	187565BB_
	187565WG_
	187565BG_
	187565GB_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	485 | >90	3
3000K	505 | >90	5



1.6

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 32° SDCM2 L70|60K 0.38kg

	CODE
	187665WW_
	187665GG_
	187665BB_
	187665WG_
	187665BG_
	187665GB_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	485 | >90	3
3000K	505 | >90	5

optional inner cover on page 743

441

495

back

ODREY on track

48V SYSTEM





MORE COMBINATIONS
weverducre.com/odrey-configurator
or contact customer service



1.7

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 32° SDCM2 L70|60K 0.34kg

CODE
187765WW_
187765GG_
187765BB_
187765WG_
187765BG_
187765GB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5



1.8

LED COB 8W | 48V | DALI dim
aluminium wet painted | shade matching inner cover included
PC adapter

IP20 32° SDCM2 L70|60K 0.45kg

CODE
187865WW_
187865GG_
187865BB_
187865WG_
187865BG_
187865GB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485	>90	3
3000K	505	>90	5

optional inner cover on page 743





445



495

PRIVATE RESIDENCE NETHERLANDS



▶ **DESIGN WITH LOVE**

back



OFFICE GERMANY

STUBE on track

48V SYSTEM

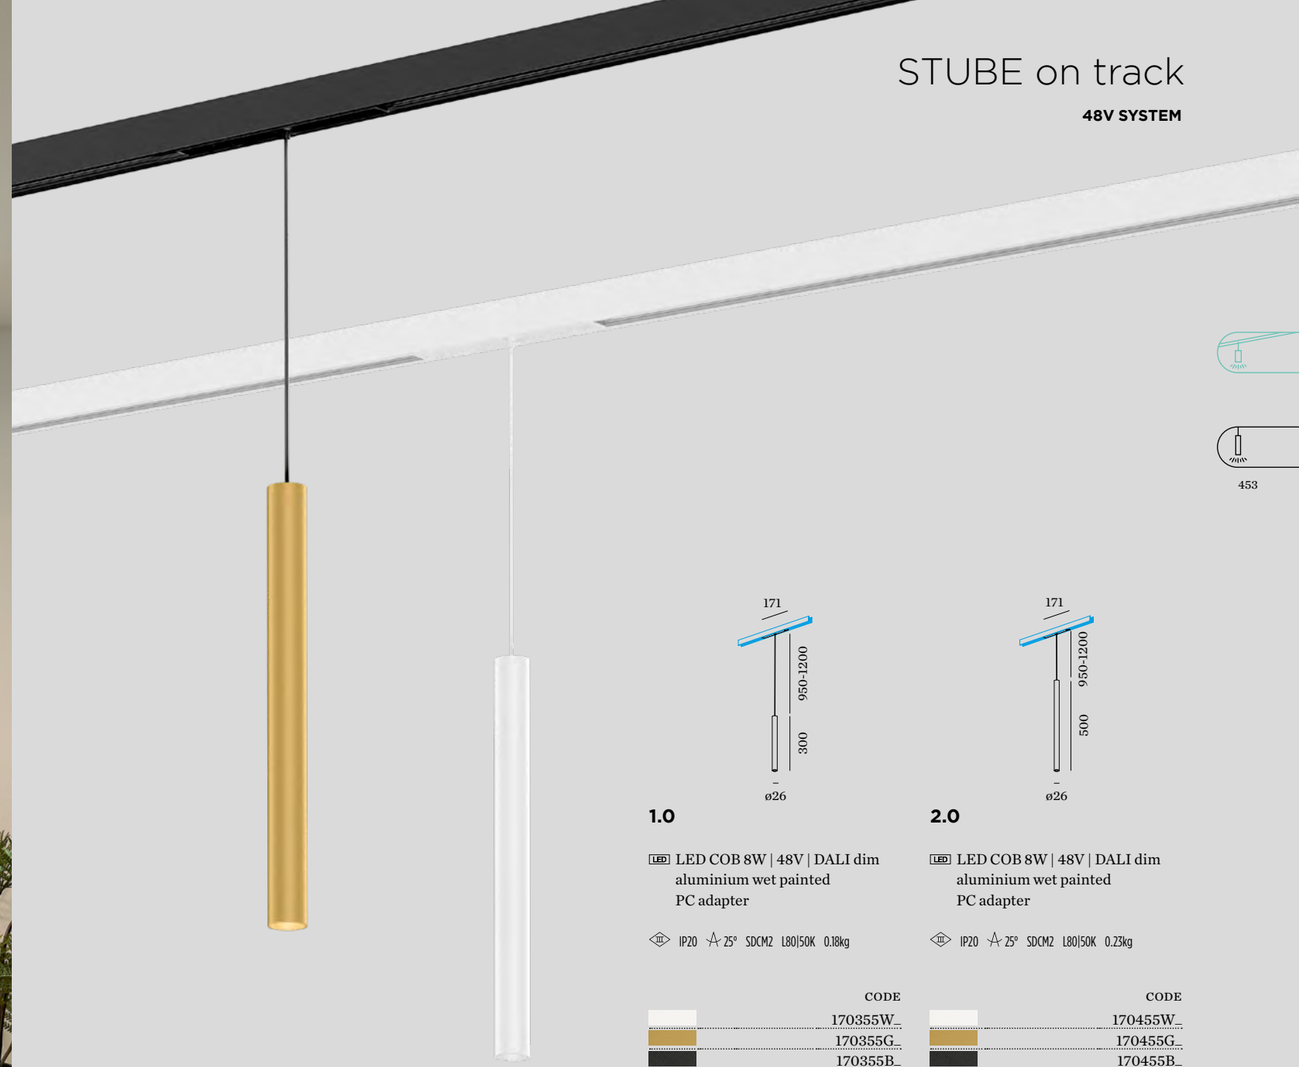

453

1.0

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 25° SDCM2 L80|50K 0.18kg

	CODE
	170355W_
	170355G_
	170355B_

other cable lengths and colour combinations on request

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5

2.0

LED COB 8W | 48V | DALI dim
aluminium wet painted
PC adapter

IP20 25° SDCM2 L80|50K 0.23kg

	CODE
	170455W_
	170455G_
	170455B_

other cable lengths and colour combinations on request

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5

back

PRIVATE RESIDENCE AUSTRIA



SOLLI on track

48V SYSTEM





451



1.0

LED COB 5W | 48V | DALI dim
aluminium powder coated
black cable | PC adapter
artisanal italian hand blown glass

IP20 SDCM2 L80|50K 0.70kg

	CODE
	238185FD_
	238185TD_
	238185WB_

other cable lengths and colour combinations on request

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	215	>90	3
3000K	230	>90	5

back



RECESSED | SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view
for more support and extended layout of 1-phase tracks,
please check our FAQ section on weverducre.com/faq





TRACK PROFILE

recessed | 220-240V | 16A

	CODE
1m	90014118
1m	90014119
2m	90014120
2m	90014121
3m	90014122
3m	90014123



F | MOUNTING BRACKET

for recessed fixation

34-45 45 4-15

CODE
90014100

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



TRACK PROFILE

surface | suspended | 220-240V | 16A

	CODE
1m	90014001
1m	90014007
2m	90014002
2m	90014008
3m	90014003
3m	90014009



G | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

	CODE
1,5m	90014101
1,5m	90014102
3m	90014103
3m	90014104

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



A | END FEED 1.0

220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014018
	90014019



A | END FEED 2.0

220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014020
	90014021



B | MIDDLE FEED

straight
220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014036
	90014037



C | END CAP LEFT/RIGHT

	CODE
	90014028
	90014029



D | L-CONNECTOR 1.0

220-240V | max. 3 x 1.5mm² - 16A
can be used as feed

	CODE
	90014024
	90014025



D | L-CONNECTOR 2.0

220-240V | max. 3 x 1.5mm² - 16A
can be used as feed

	CODE
	90014026
	90014027



E | CONNECTOR

straight | 220-240V | 16A

	CODE
	90014022
	90014023



COVERPLATE END FEED

only use with recessed tracks

	CODE
	90014124
	90014125

more 1-phase track accessories on page 740

back



ENSO BOUTIQUE HOTEL | TIM DE TAEYE & TINE VANPARIJS KNOKKE-HEIST | BELGIUM



SARA on track

1-PHASE

281





529



W



G



K



B



for LED version
inner ring is black

1.0 LED

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
1-phase Global® track adapter

IP20 0-90°|355° 34° SDCM2 L70|50K 0.24kg

	CODE
	157168W_
	157168G_
	157168K_
	157168B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	500 | >80	3
3000K	530 | >80	5

OPTIONAL

phase-cut | bluetooth dimmer

CODE
90019100

specs on page 729

1.0 PAR16

PAR16 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium powder coated
1-phase Global® track adapter

IP20 0-90°|355° 0.16kg

	CODE
	157120W0
	157120G0
	157120K0
	157120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 731

back



BRACE | HELLE FLOU | ANKER & CO COPENHAGEN | DENMARK





LENDHOTEL | LAM ARCHITEKTUR ZT GMBH GRAZ | AUSTRIA



SQUBE on track

1-PHASE







1.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
1-phase Global® track adapter

IP20 0-90°|355° 39° SDCM2 L70|50K 0.36kg

	CODE
	144168W_
	144168B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	415	>80	3
3000K	430	>80	5
1800-3000K	350	>80	9

OPTIONAL

phase-cut | bluetooth dimmer

CODE
90019100

specs on page 729

1.0 PAR16

PAR16 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium powder coated
1-phase Global® track adapter

IP20 0-90°|355° 0.32kg

	CODE
	144120W0
	144120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 731



for LED version
inner ring is black



PAR16

back



PRIVATE RESIDENCE NORWAY

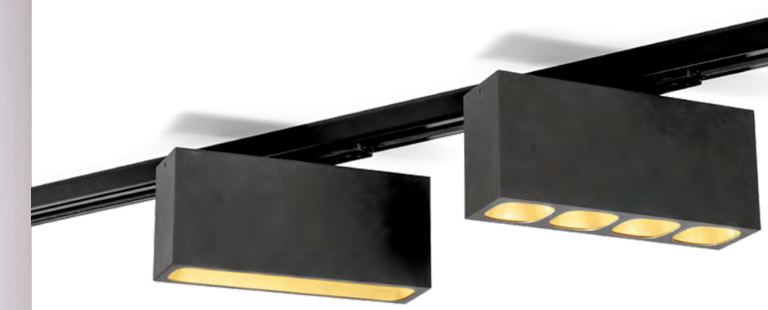

PIRRO on track

1-PHASE



165



257





2.0 OPAL

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PMMA cover | 1-phase Global® track adapter

IP20 310° 95° SDCM3 L80|50K 0.33kg

	CODE
	173284E_
	173284K_
	173284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	240	>90	3
3000K	260	>90	5



2.0 SPOT

LED 2x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC lens and reflector
1-phase Global® track adapter

IP20 310° 32° SDCM2 L80|50K 0.38kg

	CODE
	173264E_
	173264K_
	173264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x380	>90	3
3000K	2x405	>90	5



4.0 OPAL

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PMMA cover | 1-phase Global® track adapter

IP20 310° 95° SDCM3 L80|50K 0.57kg

	CODE
	173484E_
	173484K_
	173484B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	550	>90	3
3000K	580	>90	5



4.0 SPOT

LED 4x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC lens and reflector
1-phase Global® track adapter

IP20 310° 32° SDCM2 L80|50K 0.61kg

	CODE
	173464E_
	173464K_
	173464B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x380	>90	3
3000K	4x405	>90	5

back



URBAN SPACES | STUDIO KOMO STUTTGART | GERMANY



DRO on track

1-PHASE



1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium powder coated
artisanal italian hand blown glass
1-phase Global® track adapter

IP20 0.60kg

	CODE
	1724G0WB0
	1724G0YB0



brown on



brown off

back

OPTIONAL

QT14 3.5W | G9 | phase-cut dim

	CODE
3000K | 250lm	9010G804

specs on page 732



ODREY on track

1-PHASE

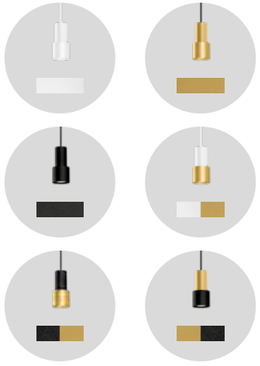

MORE COMBINATIONS
weverducre.com/odrey-configurator
or contact customer service



1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

IP20 0.29kg

	CODE
	187120WW0
	187120GG0
	187120BB0
	187120WG0
	187120BG0
	187120GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more options and specs on page 731



1.2

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | shade matching inner cover included
incl. 1-phase Global® track adapter

IP20 0.49kg

	CODE
	187220WW0
	187220GG0
	187220BB0
	187220WG0
	187220BG0
	187220GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more options and specs on page 731



1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

IP20 0.28kg

	CODE
	187320WW0
	187320GG0
	187320BB0
	187320WG0
	187320BG0
	187320GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more options and specs on page 731

437
495
back



ODREY on track

1-PHASE









1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

IP20 0.33kg

	CODE
	187420WW0
	187420GG0
	187420BB0
	187420WG0
	187420BG0
	187420GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more options and specs on page 731

1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

IP20 0.35kg

	CODE
	187520WW0
	187520GG0
	187520BB0
	187520WG0
	187520BG0
	187520GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more options and specs on page 731

1.6

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

IP20 0.36kg

	CODE
	187620WW0
	187620GG0
	187620BB0
	187620WG0
	187620BG0
	187620GB0

optional inner cover on page 743

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more options and specs on page 731

MORE COMBINATIONS
weverducre.com/odrey-configurator
or contact customer service

back

441

495



ODREY on track

1-PHASE

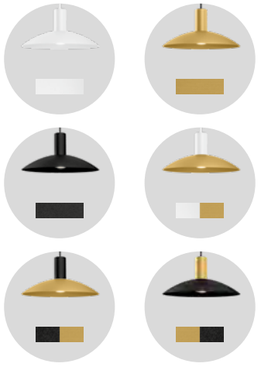

MORE COMBINATIONS
weverducre.com/odrey-configurator
or contact customer service



1.7

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted
incl. 1-phase Global® track adapter

IP20 0.32kg

	CODE
	187720WW0
	187720GG0
	187720BB0
	187720WG0
	187720BG0
	187720GB0

optional inner cover on page 743

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more options and specs on page 731



1.8

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | shade matching inner cover included
incl. 1-phase Global® track adapter

IP20 0.43kg

	CODE
	187820WW0
	187820GG0
	187820BB0
	187820WG0
	187820BG0
	187820GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 437lm	901228B3
3000K | 457lm	901228B5

more options and specs on page 731

back



OFFICE THE HOUSE | SPACELAB ARKITEKTER | ANKER & CO COPENHAGEN | DENMARK

SUSPENSIONS on track

1-PHASE



RAY 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted
1-phase Global® track adapter

IP20 0.54 | 0.68kg

2.0

200mm	CODE
	217520W0
	217520G0
	217520P0
	217520B0

3.0

300mm	CODE
	217620W0
	217620G0
	217620P0
	217620B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 731



HEXO 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted
1-phase Global® track adapter

IP20 0.58 | 0.74kg

2.0

200mm	CODE
	215520G0
	215520Q0
	215520P0
	215520B0

3.0

300mm	CODE
	215620G0
	215620Q0
	215620P0
	215620B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 731



White luminaires come with a white cable and adapter. Other colours are standard with black cable and adapter. Other colour combinations on request.

231 | 253
411 | 417
503
599
633



SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view

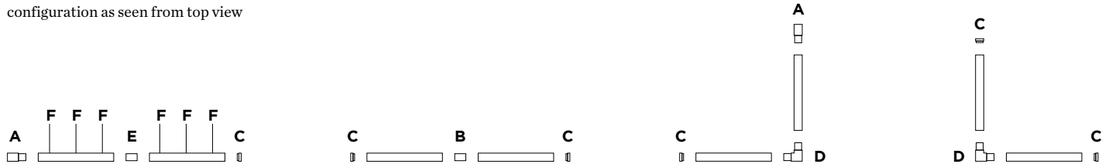



TRACK PROFILE

surface | suspended | DALI
220-240V | 16A

FELV

		CODE
	1m	90014200
	1m	90014201
	2m	90014202
	2m	90014203
	3m	90014204
	3m	90014205



F | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

		CODE
	1,5m	90014206
	1,5m	90014207
	3m	90014208
	3m	90014209

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed

top view



A | END FEED 1.0

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A

	CODE
	90014240
	90014241

top view



A | END FEED 2.0

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A

	CODE
	90014238
	90014239

top view



B | MIDDLE FEED

straight
220-240V | max. 7 x 1.5-2.5mm² | 16A

	CODE
	90014224
	90014225



C | END CAP LEFT/RIGHT

	CODE
	90014216
	90014217

top view



D | L-CONNECTOR 1.0

220-240V | max. 7 x 1.5-2.5mm² | 16A
can be used as feed

	CODE
	90014220
	90014221

top view



D | L-CONNECTOR 2.0

220-240V | max. 7 x 1.5-2.5mm² | 16A
can be used as feed

	CODE
	90014222
	90014223

top view



E | STRAIGHT CONNECTOR

straight | 220-240V | 16A

	CODE
	90014226
	90014227



TRACK COVER

		CODE
	1m	90014236
	1m	90014237

more 3-phase track accessories on page 741

back



LAMOTE STRAGIER ADVOCATEN | ADINS VAN LOOVEREN ARCHITECTEN KORTRIJK | BELGIUM

SQUBE on track

3-PHASE



283







1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
3-phase track adapter

IP20 0-90°|355° 0.32kg

	CODE
	144720W0
	144720B0



PAR16



for LED version
inner ring is black

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 731

2.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
3-phase track adapter

IP20 0-90°|355° SDCM2 L70|50K 0.40kg

	CODE
	144368W_
	144368B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K | 32°	711 | >80	3
3000K | 32°	790 | >80	5
1800-3000K | 58°	790 | >80	9

OPTIONAL

phase-cut | bluetooth dimmer

	CODE
	90019100

specs on page 729

3.0 LED

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
3-phase track adapter

IP20 0-90°|355° 27° SDCM2 L70|50K 0.75kg

	CODE
	144558W_
	144558B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	1300 | >90	3
3000K	1390 | >90	5

OPTIONAL

phase-cut | bluetooth dimmer

	CODE
	90019100

specs on page 729

back

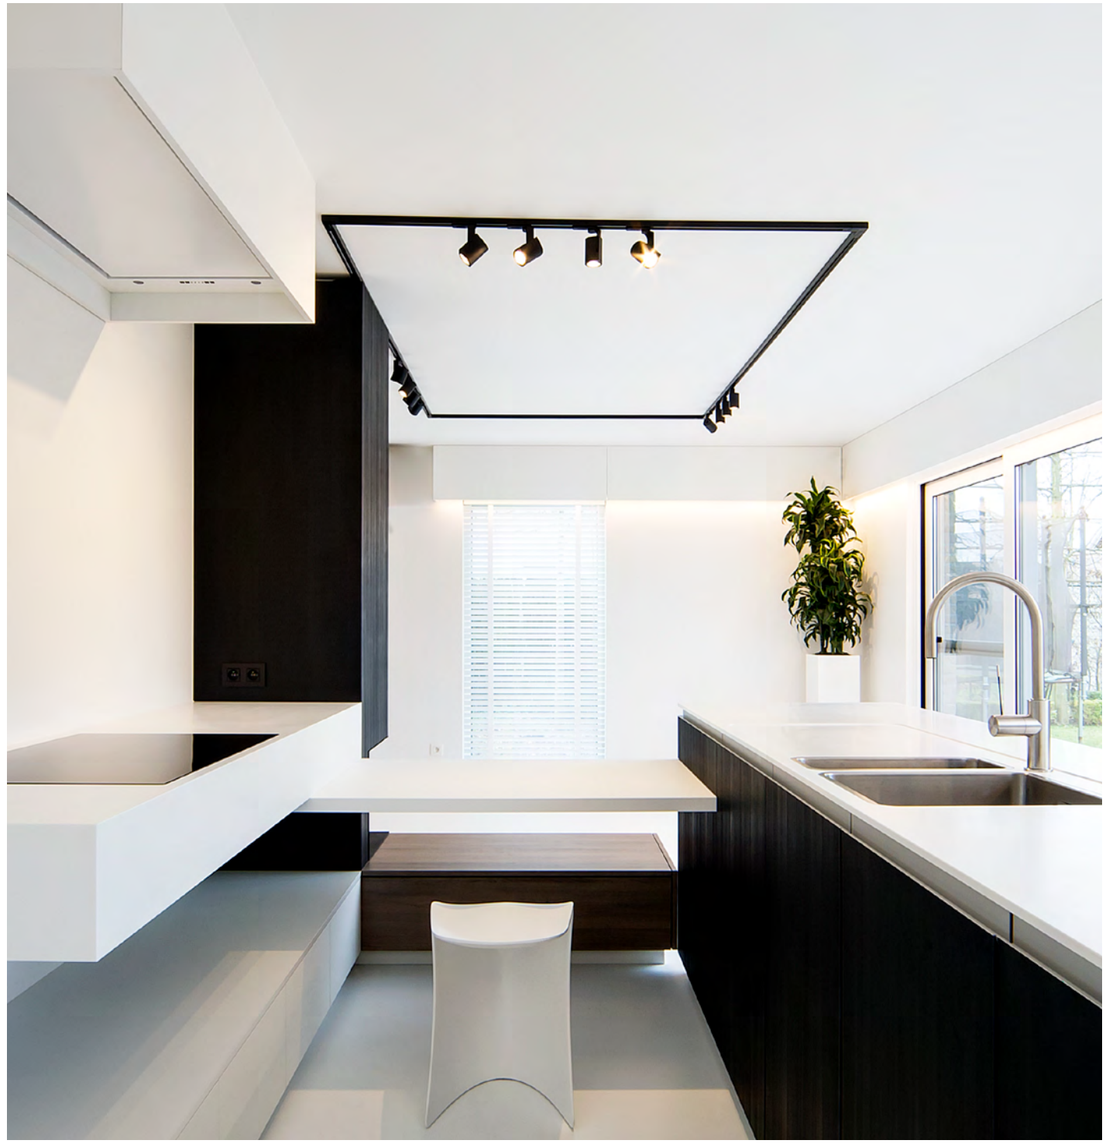

PRIVATE RESIDENCE | LOFT4C INTERIEURARCHITECTEN BELGIUM



CERAVENTO GALLERY | CASA & COMPANY | DANILO CASTALDI LIGHTING CONSULTANT PESCARA | ITALY



HOTEL SAN GIACOMO | ALESSANDRO CESTELE BRENTONICO | ITALY

back



PRIVATE RESIDENCE GERMANY

CENO fort on track

3-PHASE





1.0

LED COB 36W
220-240VAC | 50-60Hz
3-phase track adapter

IP20 0-90°|360° 24° SDCM2 L70|50K 0.78kg



honeycomb

OPTIONAL

honeycomb louver

	CODE
■	90051132

non-dim

	CODE
□	166963W_
■	166963B_

DALI dim

	CODE
□	166965W_
■	166965B_

LIGHT COLOUR	LUMEN | CRI	CODE
3000K	2650 | >90	5
4000K	2830 | >90	7

back



PRIVATE RESIDENCE | THE ART OF LIVING MAGAZINE NETHERLANDS

SUSPENSIONS on track

3-PHASE



RAY 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted
3-phase track adapter

IP20 0.54 | 0.68kg

2.0

200mm	CODE
	217320W0
	217320G0
	217320P0
	217320B0

3.0

300mm	CODE
	217420W0
	217420G0
	217420P0
	217420B0



White luminaires come with a white cable and adapter. Other colours are standard with black cable and adapter. Other colour combinations on request.

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 731



HEXO 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted
3-phase track adapter

IP20 0.58 | 0.74kg

2.0

200mm	CODE
	215320G0
	215320Q0
	215320P0
	215320B0

3.0

300mm	CODE
	215420G0
	215420Q0
	215420P0
	215420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 731







A | 1.0

LED PCB 18W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover

IP20 SDCM3 L80|50K 1.70kg

phase-cut dim
3000K | >90 CRI | 1090lm

	CODE
	500384W5
	500384B5

DALI dim
3000K | >90 CRI | 1090lm

	CODE
	500385W5
	500385B5

B | CONNECTOR POINT

phase-cut dim up to max. 4 fixtures
DALI dim up to max. 2 fixtures

	CODE
	900190W1
	900190B1

C | STEEL SUSPENSION CABLE

	CODE
2.0m	90015102

D1 | POWER FEEDER

for phase-cut dim | incl. steel suspension cable 2.0m | max. 10 luminaires per power feeder

	CODE
	90018010
	90018011

D2 | POWER FEEDER

for DALI 2.0m | incl. steel suspension cable 2.0m | max. 10 luminaires per power feeder

	CODE
	90018012
	90018013





465

SURFACE EXAMPLES

configuration as seen from top view | minimum angle 45°

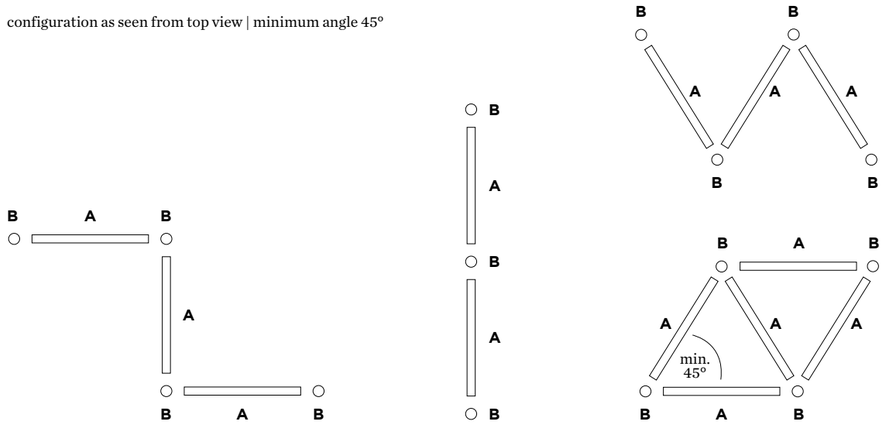

SUSPENDED EXAMPLES

configuration as seen from top view | minimum angle 45°
can be used up or down (direct or indirect)

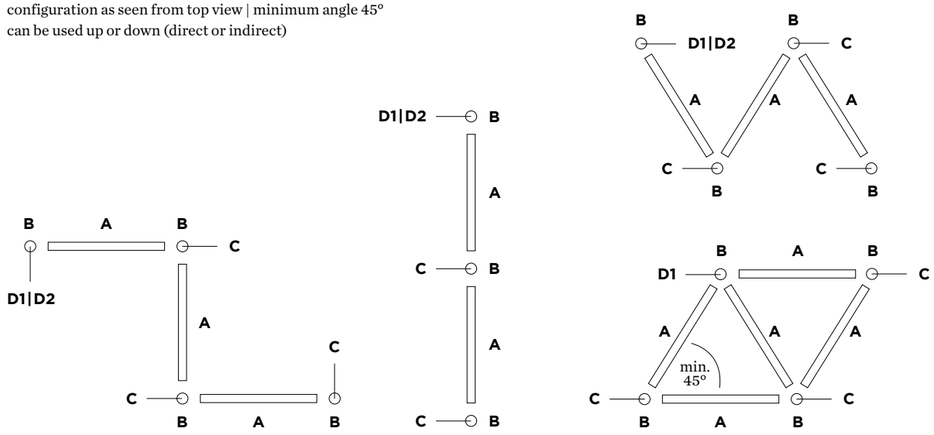



SLEEVESUP! SPACES GMBH GIESSEN | GERMANY

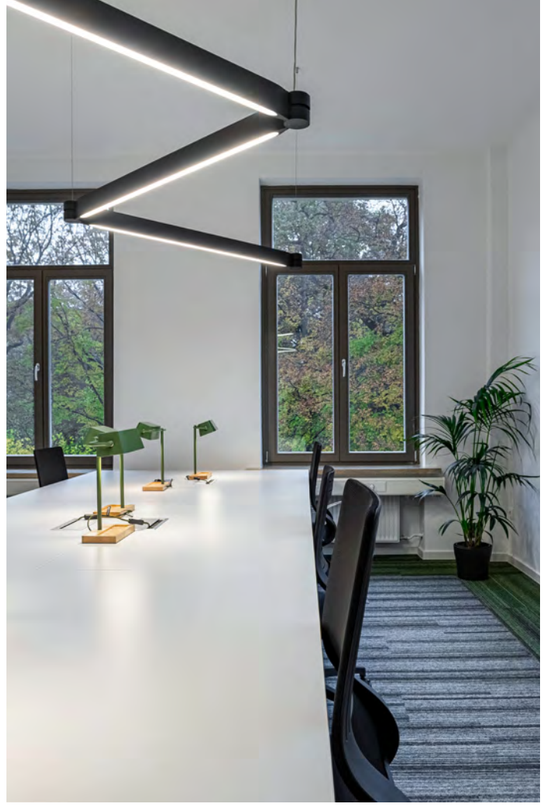

SLEEVESUP! SPACES GMBH HANNOVER | GERMANY



OFFICE KR PROPERTIES | H2A ARCHITECURAL GROUP | K2 LIGHT ARCHITECTURE MOSCOW | RUSSIA

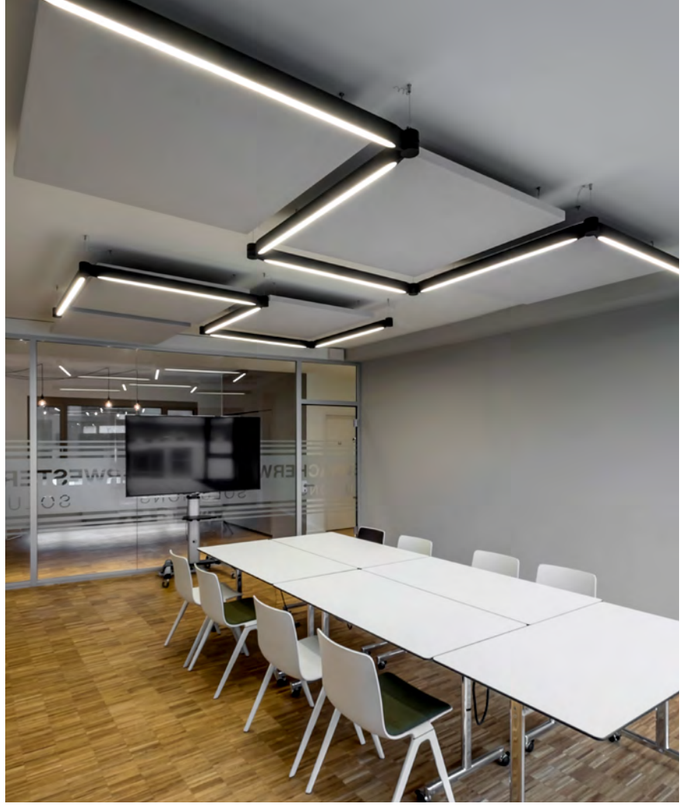

OFFICE WESTERNACHER SOLUTIONS AG | JENNIFER BÜHLING DESIGNFUNKTION BERLIN | GERMANY



YEP, RIGHT THERE

SPOT LANDING FOR YOUR FAVOURITE LIGHT

There's certainly one question you no longer need to ask: Where is the power outlet? That's because this doesn't really matter with PIRRO SYSTEM. After all, lights can be optically positioned precisely where they look just right – perfect, in fact. How does it work? PIRRO opal and PIRRO spot insets can be attached to two rails of different lengths and in many different versions. This lets you create a small work of art on every ceiling reminiscent of well-known Bauhaus classics – and that's no coincidence. Serge Cornelissen used exactly those classics as models or his lamp creation, which above all sets itself apart with its functionality, style and minimalism. A true success story, if we do say to ourselves. We'd like to add that the PIRRO SYSTEM is available in subtle white, gold or black, and can be combined with insets in two sizes and four different colours.

Eine Frage müssen Sie sich ab sofort bestimmt nicht mehr stellen und zwar: Wo ist hier der Stromauslass? Denn das ist mit PIRRO SYSTEM ziemlich egal. Schließlich lassen sich Leuchten damit optisch punktgenau dort platzieren, wo sie einfach richtig und zwar richtig gut aussehen. Wie's funktioniert? PIRRO Opal und PIRRO Spot Insets können auf zwei unterschiedlich langen Schienen und in vielen verschiedenen Varianten angebracht werden. So entsteht an jeder Decke ein kleines Kunstwerk, das nicht umsonst an bekannte Bauhaus-Klassiker denken lässt. Genau die dienten Serge Cornelissen nämlich als Vorbild für seine Leuchten-Kreation, die vor allem durch Funktionalität, Stil und Minimalismus besticht. Echt gelungen, finden wir und fügen hinzu, dass PIRRO SYSTEM in dezentem Weiß, Gold oder Schwarz zu haben ist und mit Insets in zwei Größen und vier verschiedenen Farbvarianten kombiniert werden kann.

HOW TO COMBINE YOUR PIRRO SYSTEM

CEILING BASE SURFACE

available in ○ white, ● gold or ● black



1.0

754 mm



2.0

1150 mm

PIRRO OPAL OR SPOT INSETS

available in ◑ white and black, ◑ white and gold, ◑ black and gold or ● black



2.0 opal

2.0 spot

4.0 opal

4.0 spot

CREATE YOUR OWN DESIGN

some examples



ceiling base 1.0 with insets

754 mm



ceiling base 2.0 with insets

1150 mm

back



PIRRO SYSTEM

CEILING SURFACE




165


257





2.0 OPAL

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover

IP20 95° SDCM3 L80|50K 0.30kg

	CODE
	151284E_
	151284J_
	151284K_
	151284B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	240 | >90	3
3000K	260 | >90	5



2.0 SPOT

LED 2x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC lens and reflector

IP20 32° SDCM2 L80|50K 0.30kg

	CODE
	151264E_
	151264J_
	151264K_
	151264B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x380 | >90	3
3000K	2x405 | >90	5



4.0 OPAL

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover

IP20 95° SDCM3 L80|50K 0.52kg

	CODE
	151484E_
	151484J_
	151484K_
	151484B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	550 | >90	3
3000K	580 | >90	5



4.0 SPOT

LED 4x LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC lens and reflector

IP20 32° SDCM2 L80|50K 0.48kg

	CODE
	151464E_
	151464J_
	151464K_
	151464B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	4x380 | >90	3
3000K	4x405 | >90	5

CHOOSE YOUR BASE

1.0 ceiling base
ceiling base for 2 insets
aluminium powder coated



	CODE
	90052072
	90052074
	90052073

2.0 ceiling base
ceiling base for 3 insets
aluminium powder coated



	CODE
	90052075
	90052077
	90052076

back



PRIVATE RESIDENCE BELGIUM

ILANE

CEILING SURFACE

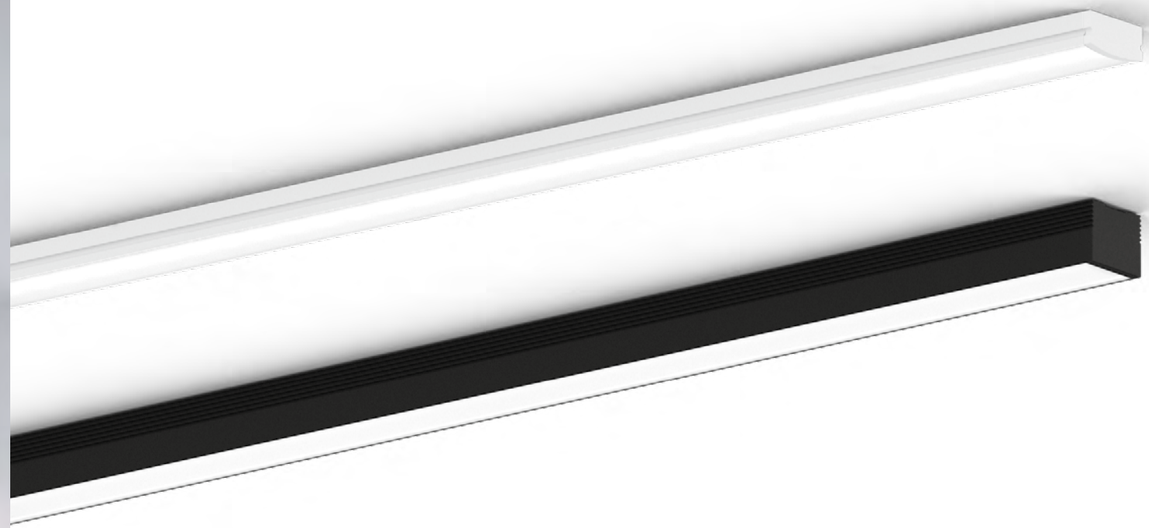

1.0 PROFILE

aluminium wet painted | opal diffuser
included end caps and mounting clips

Ⓟ 0.11kg/m



		CODE
	2m	911991W2
	2m	911991B2
	3m	911991W3
	3m	911991B3

2.0 PROFILE

aluminium wet painted | opal diffuser
included end caps and mounting clips

Ⓟ 0.19kg/m



		CODE
	2m	911992W2
	2m	911992B2
	3m	911992W3
	3m	911992B3

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

	CODE
20W | 2m	9003S21_
30W | 3m	9003S31_
50W | 5m	9003S41_

LED COB strip 24V | IP20
15W/m | 1250lm/m

	CODE
30W | 2m	9003S22_
45W | 3m	9003S32_
75W | 5m	9003S42_

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

	CODE
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 728

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

	CODE
20W | 2m	9003S21_
30W | 3m	9003S31_
50W | 5m	9003S41_

LED COB strip 24V | IP20
15W/m | 1250lm/m

	CODE
30W | 2m	9003S22_
45W | 3m	9003S32_
75W | 5m	9003S42_

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

	CODE
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 728



only 1.0
black diffuser



only 2.0
flush with
plasterboard

for net output of LED strip on profiles,
check weverducre.com/ilane

OPTIONAL

Black diffuser | only for 1.0

	CODE
2m	911902B1
3m	911903B1

Double side tape for profile fixation

	CODE
3m	90019199

more accessories on page 738

back

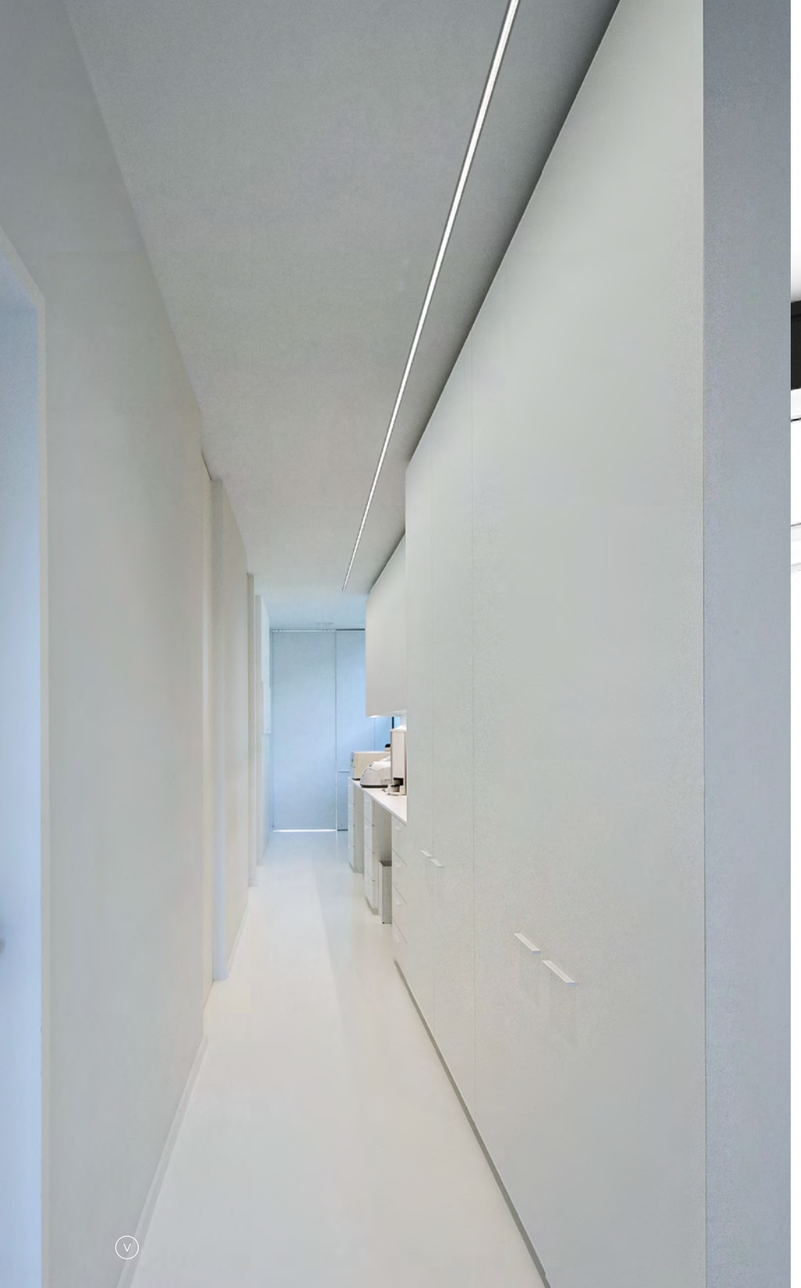



ILANE

CEILING SURFACE | RECESSED

3.0 PROFILE

aluminium wet painted | opal diffuser
included end caps and mounting clips

Ⓟ 0.26kg/m



		CODE
	2m	911993W2
	2m	911993B2
	3m	911993W3
	3m	911993B3

4.0 PROFILE

aluminium wet painted | opal diffuser
included end caps and mounting clips

Ⓟ 0.24kg/m



		CODE
	2m	911994W2
	2m	911994B2
	3m	911994W3
	3m	911994B3

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

	CODE
20W | 2m	9003S21_
30W | 3m	9003S31_
50W | 5m	9003S41_

LED COB strip 24V | IP20
15W/m | 1250lm/m

	CODE
30W | 2m	9003S22_
45W | 3m	9003S32_
75W | 5m	9003S42_

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

	CODE
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 728

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

	CODE
20W | 2m	9003S21_
30W | 3m	9003S31_
50W | 5m	9003S41_

LED COB strip 24V | IP20
15W/m | 1250lm/m

	CODE
30W | 2m	9003S22_
45W | 3m	9003S32_
75W | 5m	9003S42_

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

	CODE
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 728



only 3.0
black diffuser



only 4.0
flush with
plasterboard
with trim

for net output of LED strip on profiles,
check weverducre.com/ilane

OPTIONAL

Black diffuser | only for 3.0

	CODE
2m	911912B1
3m	911913B1

Double side tape for profile fixation

	CODE
3m	90019199

more accessories on page 738

back





ILANE IP65

CEILING SURFACE | RECESSED

3.0 PROFILE

aluminium wet painted | opal diffuser
included end caps and mounting clips

Ⓟ 0.26kg/m



		CODE
	2m	911993W2
	2m	911993B2
	3m	911993W3
	3m	911993B3

ALWAYS USE

LED COB strip 24V | IP65
10W/m | 780lm/m

	CODE
16W | 2m	9003S61_
24W | 3m	9003S71_
40W | 5m	9003S81_

LED COB strip 24V | IP65
15W/m | 1350lm/m

	CODE
30W | 2m	9003S62_
45W | 3m	9003S72_
75W | 5m	9003S82_

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

	CODE
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 728

4.0 PROFILE

aluminium wet painted | opal diffuser
included end caps and mounting clips

Ⓟ 0.24kg/m



		CODE
	2m	911994W2
	2m	911994B2
	3m	911994W3
	3m	911994B3

ALWAYS USE

LED COB strip 24V | IP65
10W/m | 780lm/m

	CODE
16W | 2m	9003S61_
24W | 3m	9003S71_
40W | 5m	9003S81_

LED COB strip 24V | IP65
15W/m | 1350lm/m

	CODE
30W | 2m	9003S62_
45W | 3m	9003S72_
75W | 5m	9003S82_

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

	CODE
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 728



only 3.0
black diffuser



only 4.0
flush with
plasterboard
with trim

for net output of LED strip on profiles,
check weverducre.com/ilane

OPTIONAL

Black diffuser | only for 3.0

	CODE
2m	911912B1
3m	911913B1

Double side tape for profile fixation

	CODE
3m	90019199

more accessories on page 738

back

CEILING SUSPENDED

406 — 475

CEILING SUSPENDED SINGLE



RAY
411



BOX
413



DOCUS
415



HEXO
417



SHIEK 1.0
421



SHIEK 3.0
423



SHIEK 4.0
425



WETRO
429



ODREY
445



DINOR 1.0
447



DINOR 2.0
447



DINOR 3.0
447

SOLLI
451

STUBE
453



CORK
455

CONE
457



BISHOP
459



NET
463



ELLO
465



DARF
469

GIGANT
473

CEILING SUSPENDED MULTI



RAY MULTI
411



BOX MULTI
413



DOCUS MULTI
415



HEXO MULTI
417



SHIEK MULTI
421



WETRO MULTI
429



ODREY MULTI
441

DESIGNER FAMILIES



ROOMOR OFFICE
31



MIRRO
55



DRO
71



WIRO
97



J.J.W.
125

back

CHOOSE YOUR BASE

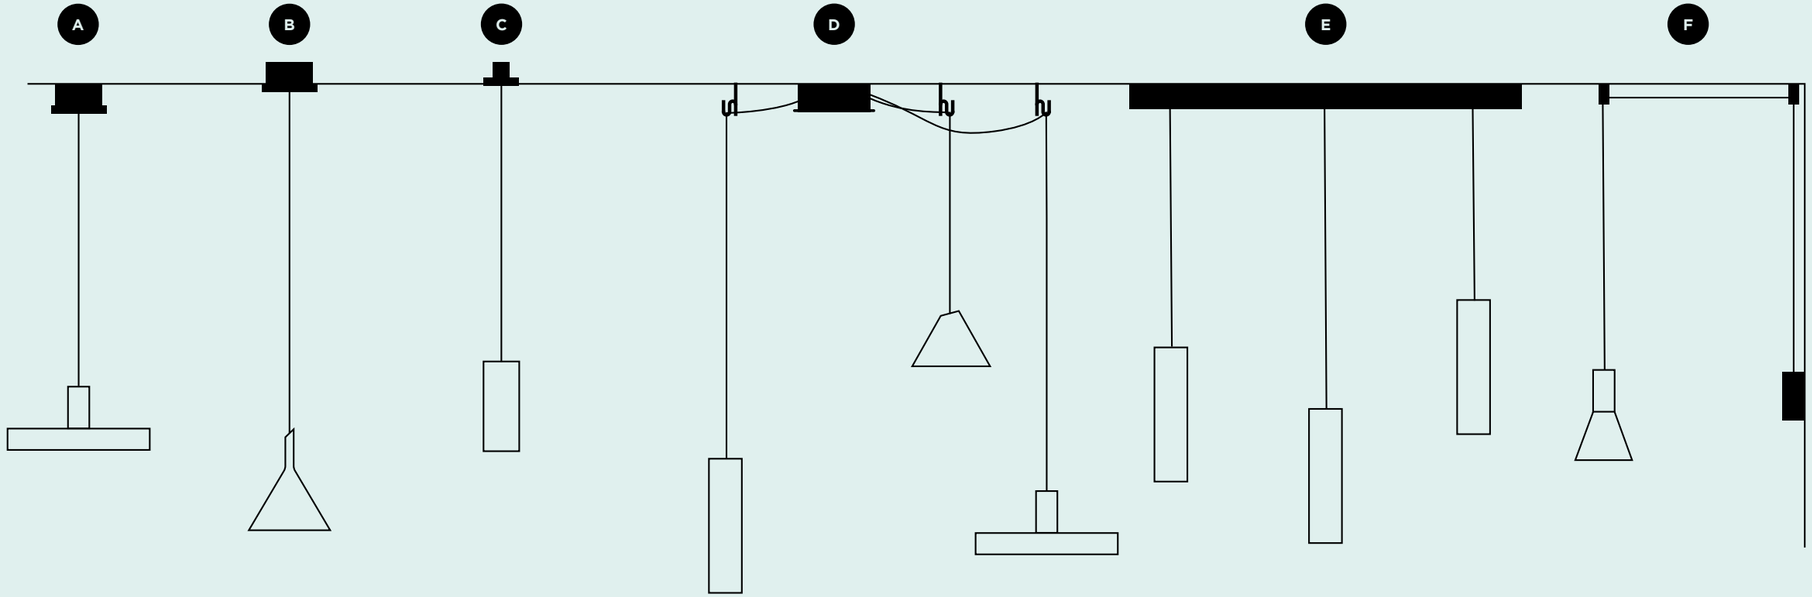

If you have fallen in love with one of our luminaires, but need a matching ceiling rose: Then perhaps we can act as a “dating agency”. The choice basically comes down to single or multiple pendant roses. For single pendants, they are either surface mounted, semi-recessed or invisible. The multiple pendant ceiling rose is available in a round or rectangular shape. And last but not least, there is also a wall version with an integrated light switch. Have you found your match? Then all that remains to do now is decide on a suitable lampshade and a suitable colour on the following pages.

Sie haben sich in eine unserer Leuchten verliebt und suchen jetzt nach dem passenden Baldachin? Dann spielen wir hier mal kurz die Vermittlungsbörse. Grundsätzlich können Sie zwischen Einzel- oder Multiabhängung wählen. Bei der Einzelabhängung gibts Aufbau-, Semi-Recessed oder Invisible. Den Multibaldachin gibts in runder oder gerader Form. Und zu guter Letzt die Wandvariante mit integriertem Lichtschalter. Na, ein Match gefunden? Dann müssen Sie sich jetzt nur noch für einen passenden Lampenschirm auf den nächsten Seiten und eine passende Farbe entscheiden.

A



SINGLE BASE
ceiling base round

	CODE
	90052022
	90052021

B



SEMI RECESSED BASE
for shades without steel wire only

73-76 70 10-35

	CODE
	90052026
	90052027

C



INVISIBLE SINGLE BASE
plasterkit | system - with fixation and adjustment with or without steel cable | max. 10kg

68 80 12.5

	CODE
	90015196
	90015195

D



MULTIPLE BASE
up to max. 4 | 8 luminaires

		CODE
	max. 4	90052005
	max. 4	90052006
	max. 8	90052031
	max. 8	90052032

E



LINEAR MULTIPLE BASE
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

		CODE
	max. 2	90052007
	max. 2	90052008
	max. 3	90052009
	max. 3	90052010
	max. 4	90052011
	max. 4	90052012
	max. 5	90052013
	max. 5	90052014

F



WALL BASE
for 1 luminaire | incl. 2 wall-ceiling brackets | for cable 4.25-5.5mm diameter | incl. switch on/off

	CODE
	90019195
	90019196

wall - ceiling bracket

	CODE
	90019197
	90019198

back



OFFICE CLIMAWEST | AAVO ARCHITECTEN ZWEVEGEM | BELGIUM



white luminaires come with a white cable; other colours are standard with black cable | alternative colour combinations on request

RAY

CEILING SUSPENDED



2.0 | 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 36° SDCM2 L70|50K 0.62|0.76kg

2.0

200mm	CODE
	226764W_
	226764L_
	226764G_
	226764P_
	226764B_

3.0

300mm	CODE
	226864W_
	226864L_
	226864G_
	226864P_
	226864B_

add your base from the right column

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	405	>90	3
3000K	430	>90	5
2000-3000K	570	>95	9



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.54|0.68kg

2.0

200mm	CODE
	227720W0
	227720L0
	227720G0
	227720P0
	227720B0

3.0

300mm	CODE
	227820W0
	227820L0
	227820G0
	227820P0
	227820B0

add your base from the right column

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 731

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

231

B | Semi recessed single base

	CODE
	90052026
	90052027

377 | 389

C | Invisible single base
plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base
up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

503

E | Linear multiple base
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

599

F | Wall base
incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408

633

back

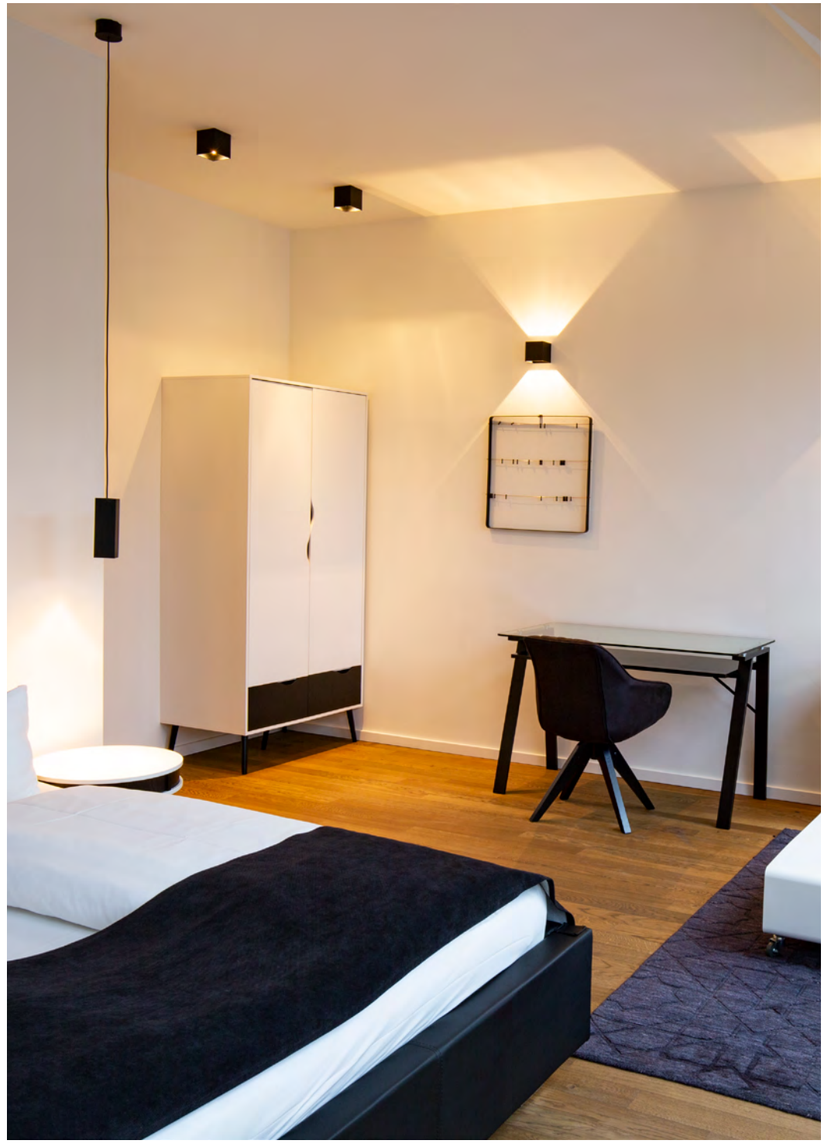

HOTEL B(L)ACKHOME | KADLETZ ARCHITEKTUR GRAZ | AUSTRIA





white luminaires come with a white cable; other colours are standard with black cable | alternative colour combinations on request

▶ DESIGN WITH LOVE

BOX

CEILING SUSPENDED



2.0 | 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 36° SDCM2 L70|50K 0.66|0.83kg

2.0

200mm	CODE
	226164W_
	226164L_
	226164P_
	226164B_

3.0

300mm	CODE
	226264W_
	226264L_
	226264P_
	226264B_

add your base from the right column

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	405 | >90	3
3000K	430 | >90	5
2000-3000K	570 | >95	9



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.59|0.76kg

2.0

200mm	CODE
	227120W0
	227120L0
	227120P0
	227120B0

3.0

300mm	CODE
	227220W0
	227220L0
	227220P0
	227220B0

add your base from the right column

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 731

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

239

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base
plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base
up to max. 4 | 8 luminaires

		CODE
	max. 4	90052005
	max. 4	90052006
	max. 8	90052031
	max. 8	90052032

511

E | Linear multiple base
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

		CODE
	max. 2	90052007
	max. 2	90052008
	max. 3	90052009
	max. 3	90052010
	max. 4	90052011
	max. 4	90052012
	max. 5	90052013
	max. 5	90052014

605

F | Wall base
incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408

649

back



SHOWROOM | GRANDO KEUKENS BRUGGE | BELGIUM





white luminaires come with a white cable; other colours are standard with black cable | alternative colour combinations on request

DOCUS

CEILING SUSPENDED



2.0 | 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 36° SDCM2 L70|50K 0.66|0.82kg

2.0

200mm	CODE
	226564W_
	226564L_
	226564G_
	226564P_
	226564B_

3.0

300mm	CODE
	226664W_
	226664L_
	226664G_
	226664P_
	226664B_

add your base from the right column

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	405 | >90	3
3000K	430 | >90	5
2000-3000K	570 | >95	9



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.59|0.72kg

2.0

200mm	CODE
	227520W0
	227520L0
	227520G0
	227520P0
	227520B0

3.0

300mm	CODE
	227620W0
	227620L0
	227620G0
	227620P0
	227620B0

add your base from the right column

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 731

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base
plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base
up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base
incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408

247

back



GREENHOUSE BXL | INTERVEST OFFICES & WAREHOUSES DIEGEM | BELGIUM



all colours are standard with black cable | white cable on request

HEXO

CEILING SUSPENDED



2.0 | 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 36° SDCM2 L70|50K 0.66|0.82kg

2.0

200mm	CODE
	226364G_
	226364Q_
	226364P_
	226364B_

3.0

300mm	CODE
	226464G_
	226464Q_
	226464P_
	226464B_

add your base from the right column

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	420 | >90	3
3000K	440 | >90	5
2000-3000K	570 | >95	9



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.58|0.74kg

2.0

200mm	CODE
	227320G0
	227320Q0
	227320P0
	227320B0

3.0

300mm	CODE
	227420G0
	227420Q0
	227420P0
	227420B0

add your base from the right column

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 731

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021



B | Semi recessed single base

	CODE
	90052026
	90052027



C | Invisible single base
plasterkit | system

	CODE
	90015196
	90015195



D | Multiple base
up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base
incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408



BOSSUYT SHOP INTERIORS KUURNE | BELGIUM

back



PRIVATE RESIDENCE | EVA CARLIER INTERIOR DESIGN BELGIUM

SHIEK

CEILING SUSPENDED







1.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 0.36kg

1800-2850K | >90 CRI | 525lm

	CODE
	237188W9
	237188J9
	237188P9
	237188K9
	237188Z9

2.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 0.47kg

1800-2850K | >90 CRI | 525lm

	CODE
	237288W9
	237288J9
	237288P9
	237288K9
	237288Z9

all colours are standard with black cable | white cable on request

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base

plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408



PRIVATE RESIDENCE | ARCHITECT ROACH YOUNG STUDIO UNITED KINGDOM





reddot award 2017
winner

DESIGN AWARD 2017

GOOD DESIGN

As awarded by The Chicago Athenaeum:
Museum of Architecture and Design

all colours are standard with black
cable | white cable on request



3.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 0.60kg

1800-2850K | >90 CRI | 525lm

CODE
237388W9
237388J9
237388P9
237388K9
237388Z9



3.0 E27

A60 max. 20W | E27
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.60kg

CODE
2343E0W0
2343E0J0
2343E0P0
2343E0K0
2343E0Z0

OPTIONAL

A60 9W opal | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more options and specs on page 732

SHIEK

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

CODE
90052022
90052021

B | Semi recessed single base

CODE
90052026
90052027

C | Invisible single base
plasterkit | system

CODE
90015196
90015195

D | Multiple base
up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base
incl. 2 wall-ceiling brackets

CODE
90019195
90019196

more information on page 408



HARGASSNER ENERGY WORLD LINZ | AUSTRIA

SHIEK

CEILING SUSPENDED







4.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 0.70kg

1800-2850K | >90 CRI | 525lm

	CODE
	237488W9
	237488J9
	237488P9
	237488K9
	237488Z9

4.0 E27

A60 max. 20W | E27
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.70kg

	CODE
	2344E0W0
	2344E0J0
	2344E0P0
	2344E0K0
	2344E0Z0

OPTIONAL

A60 9W opal | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more options and specs on page 732

all colours are standard with black cable | white cable on request

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base

plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408



PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM

SHIEK

CEILING SUSPENDED







5.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 0.80kg

1800-2850K | >90 CRI | 525lm

	CODE
	237588W9
	237588J9
	237588P9
	237588K9
	237588Z9

5.0 E27

A60 max. 20W | E27
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.80kg

	CODE
	2345E0W0
	2345E0J0
	2345E0P0
	2345E0K0
	2345E0Z0

OPTIONAL

A60 9W opal | E27 | phase-cut dim

	CODE
2700K | 800lm	9003E152

more options and specs on page 732

all colours are standard with black cable | white cable on request

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base

plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

		CODE
	max. 4	90052005
	max. 4	90052006
	max. 8	90052031
	max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

		CODE
	max. 2	90052007
	max. 2	90052008
	max. 3	90052009
	max. 3	90052010
	max. 4	90052011
	max. 4	90052012
	max. 5	90052013
	max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408



FASHION STORE 'T KAPELLEKE | BOSSUYT SHOP INTERIORS DEERLIJK | BELGIUM

WETRO

CEILING SUSPENDED



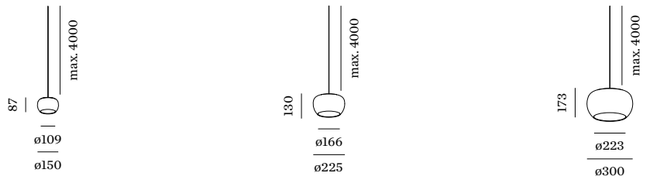

1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass

IP20 SDCM2 L80|50K 0.56kg

1800-2850K | >90 CRI | 355lm

	CODE
	236188P9
	236188B9

2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass

IP20 SDCM2 L80|50K 0.97kg

1800-2850K | >90 CRI | 355lm

	CODE
	236288P9
	236288B9

3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass

IP20 SDCM2 L80|50K 1.69kg

1800-2850K | >90 CRI | 355lm

	CODE
	236388P9
	236388B9

iF DESIGN AWARD 2017

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

all colours are standard with black cable | white cable on request

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base
plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base
up to max. 4 | 8 luminaires

		CODE
	max. 4	90052005
	max. 4	90052006
	max. 8	90052031
	max. 8	90052032

E | Linear multiple base
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

		CODE
	max. 2	90052007
	max. 2	90052008
	max. 3	90052009
	max. 3	90052010
	max. 4	90052011
	max. 4	90052012
	max. 5	90052013
	max. 5	90052014

F | Wall base
incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408



▶ **DESIGN WITH LOVE**

WIFI | SCHUBERTH UND SCHUBERTH ZT-KG VIENNA | AUSTRIA

back



BAR OSLO | NORWAY

WETRO

CEILING SUSPENDED



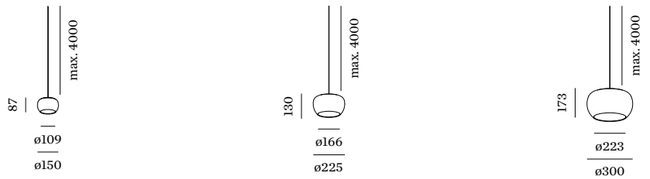

1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal italian hand blown glass

IP20 SDCM2 L80|50K 0.56kg

1800-2850K | >90 CRI | 355lm

	CODE
	236188TS9
	236188TD9

2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal italian hand blown glass

IP20 SDCM2 L80|50K 0.97kg

1800-2850K | >90 CRI | 355lm

	CODE
	236288TS9
	236288TD9

3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal italian hand blown glass

IP20 SDCM2 L80|50K 1.69kg

1800-2850K | >90 CRI | 355lm

	CODE
	236388TS9
	236388TD9

all colours are standard with black cable | white cable on request

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base

plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408



PRIVATE RESIDENCE BELGIUM



taupe on

taupe off



dark taupe on

dark taupe off

all colours are standard with black cable | white cable on request











1.0

LED LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal italian hand blown glass

IP20 SDCM2 L80|50K 0.56kg

1800-2850K | >90 CRI | 355lm

	CODE
	236188TW9
	236188DW9

2.0

LED LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal italian hand blown glass

IP20 SDCM2 L80|50K 0.97kg

1800-2850K | >90 CRI | 355lm

	CODE
	236288TW9
	236288DW9

3.0

LED LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal italian hand blown glass

IP20 SDCM2 L80|50K 1.69kg

1800-2850K | >90 CRI | 355lm

	CODE
	236388TW9
	236388DW9

WETRO

CEILING SUSPENDED

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base
plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base
up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base
incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408



HOTEL STOCKHOLM







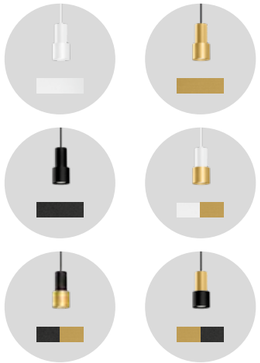

MORE COMBINATIONS

weverducre.com/odrey-configurator or contact customer service

ODREY

CEILING SUSPENDED

1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.27kg

	CODE
	287120WW0
	287120GG0
	287120BB0
	287120WG0
	287120BG0
	287120GB0

always add a base

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 731

1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.26kg

	CODE
	287320WW0
	287320GG0
	287320BB0
	287320WG0
	287320BG0
	287320GB0

always add a base

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 731

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

345 | 371

	CODE
	90052026
	90052027

C | Invisible single base

plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base

up to max. 4 | 8 luminaires

495

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408

back



HOTEL STOCKHOLM

ODREY

CEILING SUSPENDED





1.2

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | shade matching inner cover included

IP20 0.47kg

	CODE
	287220WW0
	287220GG0
	287220BB0
	287220WG0
	287220BG0
	287220GB0

always add a base

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 731

MORE COMBINATIONS
weverducre.com/odrey-configurator or contact customer service

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base



	CODE
	90052026
	90052027

C | Invisible single base



plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base



up to max. 4 | 8 luminaires

		CODE
	max. 4	90052005
	max. 4	90052006
	max. 8	90052031
	max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

		CODE
	max. 2	90052007
	max. 2	90052008
	max. 3	90052009
	max. 3	90052010
	max. 4	90052011
	max. 4	90052012
	max. 5	90052013
	max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408







MORE COMBINATIONS
weverducre.com/odrey-configurator or
contact customer service









ODREY

CEILING SUSPENDED

1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.30kg

	CODE
	287420WW0
	287420GG0
	287420BB0
	287420WG0
	287420BG0
	287420GB0

always add a base

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 731

1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.32kg

	CODE
	287520WW0
	287520GG0
	287520BB0
	287520WG0
	287520BG0
	287520GB0

always add a base

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 731

1.6

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.34kg

	CODE
	287620WW0
	287620GG0
	287620BB0
	287620WG0
	287620BG0
	287620GB0

always add a base
optional inner cover on page 743

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 731

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base


347 | 373

	CODE
	90052026
	90052027

C | Invisible single base
plasterkit | system



	CODE
	90015196
	90015195

D | Multiple base
up to max. 4 | 8 luminaires


495

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base
incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408

back







ODREY

CEILING SUSPENDED









1.7

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted

IP20 0.30kg

	CODE
	287720WW0
	287720GG0
	287720BB0
	287720WG0
	287720BG0
	287720GB0

always add a base
optional inner cover on page 743

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 731

1.8

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium wet painted | shade matching inner cover included

IP20 0.41kg

	CODE
	287820WW0
	287820GG0
	287820BB0
	287820WG0
	287820BG0
	287820GB0

always add a base

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more options and specs on page 731

MORE COMBINATIONS
weverducre.com/odrey-configurator or
contact customer service

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base



349 | 375

	CODE
	90052026
	90052027

C | Invisible single base



plasterkit | system

	CODE
	90015196
	90015195

D | Multiple base



495

up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

E | Linear multiple base

up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014

F | Wall base

incl. 2 wall-ceiling brackets

	CODE
	90019195
	90019196

more information on page 408



FILMBYEN | AART ARCHITECTS | KARSTEN SINNING | ANKER & CO COPENHAGEN | DENMARK

DINOR

CEILING SUSPENDED





1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium wet painted

IP20 SDCM2 L80|50K 0.90kg

1800-2850K | >90 CRI | 525lm

	CODE
	255188GW9
	255188BG9
	255188BB9



2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium wet painted

IP20 SDCM2 L80|50K 1.30kg

1800-2850K | >90 CRI | 525lm

	CODE
	255288GW9
	255288BG9
	255288BB9



3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium wet painted

IP20 SDCM2 L80|50K 2.30kg

1800-2850K | >90 CRI | 525lm

	CODE
	255388GW9
	255388BG9
	255388BB9

all colours are standard with black cable | white cable on request

CHOOSE YOUR BASE

A | Single base

	CODE
	90052022
	90052021

B | Semi recessed single base

	CODE
	90052026
	90052027

C | Invisible single base
plasterkit | system

	CODE
	90015196
	90015195

more information on page 408



PRIVATE RESIDENCE | LANCO DESIGN BELGIUM



PRIVATE RESIDENCE | STUDIO LEEMAN BELGIUM



SPICY LEMON | STAY STUDIO KORTRIJK | BELGIUM



SOLLI

CEILING SUSPENDED



355





1.0

LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
glass handblown

IP20 SDCM2 L80|50K 0.48kg

	CODE
	238284FD_
	238284TD_
	238284WB_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	215 | >90	3
3000K	230 | >90	5

back



PRIVATE RESIDENCE BELGIUM

STUBE

CEILING SUSPENDED





353







1.0

LED LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted

IP20 25° SDCM2 L80|50K 0.26kg

	CODE
	170554W_
	170554G_
	170554B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5

2.0

LED LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted

IP20 25° SDCM2 L80|50K 0.36kg

	CODE
	170654W_
	170654G_
	170654B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5

white luminaires come with a white cable; other colours are standard with black cable | alternative colour combinations on request

back



MAGAZIN AUF EF HERTEN | GERMANY

▶ **DESIGN WITH LOVE**



CORK

CEILING SUSPENDED



1.0

LED PCB 4W
100-240VAC | 50-60Hz | incl. driver
aluminium powder coated
fits bottles inner ø16.5 - 19.5 mm

IP20 36° SDCM3 L80|60K 0.24kg

2700K | >80 CRI | 145lm

	CODE
	210363B2

OPTIONAL

	CODE
bottle 1	
75/174 | glass	90019013
bottle 2	
87/323 | glass	90019014

back



HOTEL LILLA ROBERTS | PUROPLAN OY & TECLUX OY HELSINKI | FINLAND

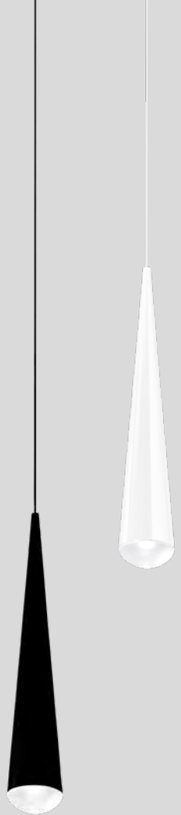

CONE

CEILING SUSPENDED



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
chrome plated | glass

IP20 38° SDCM2 L80|60K 0.55kg

2700K | >90 CRI | 405lm

	CODE
	200184W3
	200184B3

back



PRIVATE RESIDENCE | ADINS VAN LOOVEREN ARCHITECTEN BELGIUM

BISHOP

CEILING SUSPENDED

reddot award 2015
honourable mention











4.0

A60/G95 max. 25W | E27
220-240VAC | 50-60Hz
composite | wet painted

IP20 1.08kg

	CODE
	2184E0W0
	2184E0R0
	2184E0D0
	2184E0K0

6m suspension on request

OPTIONAL

G95 5.4W | E27 | phase-cut dim

	CODE
2200K | 450lm	9003E111

G95 11.2W | E27 | phase-cut dim

	CODE
2700K | 1100lm	9003E154

more options and specs on page 732



6.0

A60/G95 max. 25W | E27
220-240VAC | 50-60Hz
composite | wet painted

IP20 2.62kg

	CODE
	2186E0W0
	2186E0R0
	2186E0D0
	2186E0K0

6m suspension on request

OPTIONAL

G95 5.4W | E27 | phase-cut dim

	CODE
2200K | 450lm	9003E111

G95 11.2W | E27 | phase-cut dim

	CODE
2700K | 1100lm	9003E154

more options and specs on page 732



8.0

A60/G95 max. 25W | E27
220-240VAC | 50-60Hz
composite | wet painted

IP20 5.70kg

	CODE
	2188E0W0
	2188E0R0
	2188E0D0
	2188E0K0

6m suspension on request

OPTIONAL

G95 5.4W | E27 | phase-cut dim

	CODE
2200K | 450lm	9003E111

G95 11.2W | E27 | phase-cut dim

	CODE
2700K | 1100lm	9003E154

more options and specs on page 732

back



SCHLOSSKELLER | PLANCONSORT ZT GMBH SEGGAUBERG | AUSTRIA



RESTAURANT WARSAW | POLAND

NET

CEILING SUSPENDED





2.0

LED 2x LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 SDCM3 L80|50K 1.29kg

2700K | >90 CRI | 2x250lm

	CODE
	231264W3
	231264M3
	231264B3



4.0

LED 4x LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 SDCM3 L80|50K 2.49kg

2700K | >90 CRI | 4x250lm

	CODE
	231464W3
	231464M3
	231464B3

back

MOUNT REGALIA | IN-BETWEEN ARCHITECTS LIMITED KAU TO SHAN | HONGKONG

ELLO

CEILING SUSPENDED

reddot award 2015
winner

DESIGN AWARD 2015

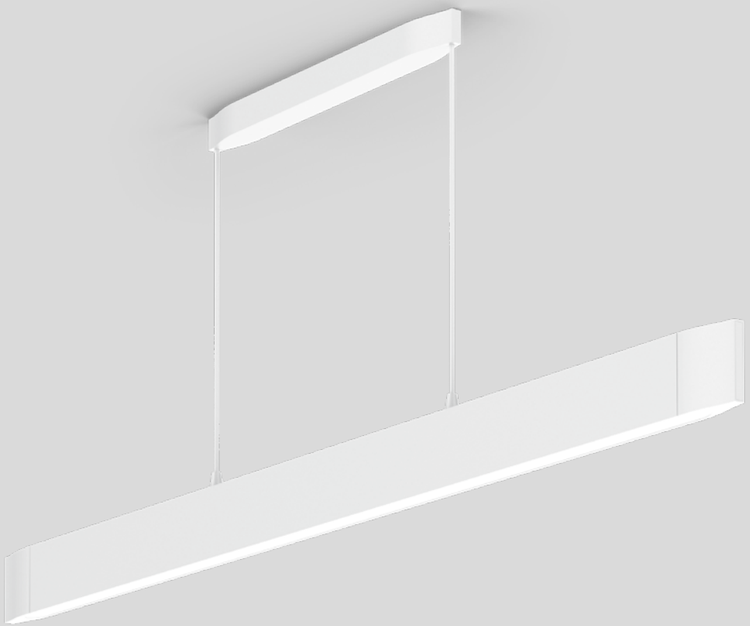



391





13.0

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover

IP20 SDCM3 L80|50K 2.00kg

3000K | >90 CRI | 1090lm



chrome endcap

	CODE
	500484W5
	500484B5

back



PRIVATE RESIDENCE | 3ARCHITECTEN BELGIUM



PRIVATE RESIDENCE | ISABEL GOMEZ INTERIORS BELGIUM

DARF

CEILING SUSPENDED

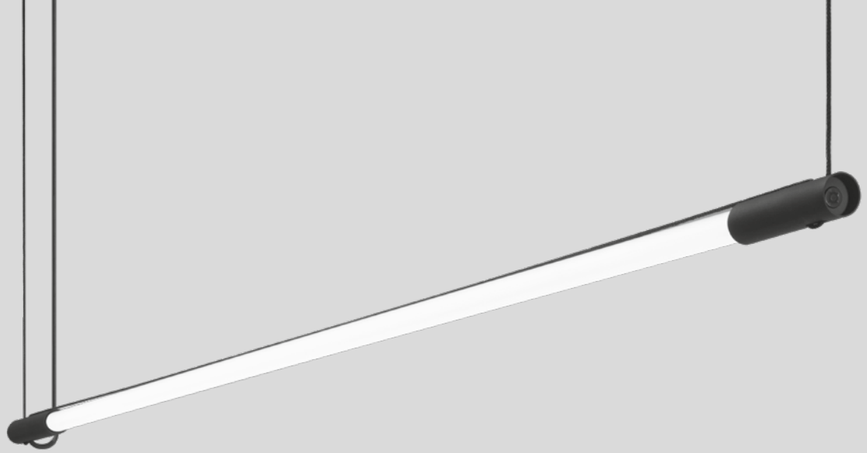







1.1
non-dim



1.2
phase-cut dim

1.1

LED TUBE 22W | non dim
220-240VAC | 50-60Hz
aluminium powder coated
black textile cable

IP20 SDCM5 L70|60K 0.42kg

3000K | >80 CRI | 3300lm

CODE 2561T7B4

4000K | >80 CRI | 3700lm

CODE 2561T7B6

1.2

LED TUBE 22W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
black textile cable

IP20 SDCM5 L70|60K 0.42kg

2700K | >90 CRI | 1920lm

CODE 2561T8B3

3000K | >90 CRI | 2095lm

CODE 2561T8B5





575

ARCHITECT | PHILIPP WEINBERGER & STUDIO MARCH GUT

back





▶ **DESIGN WITH LOVE**

SHOP MARREYT | MAISTER KNOKKE | BELGIUM

back



OFFICE ZUIDERPOORT GENT | BELGIUM

GIGANT

CEILING SUSPENDED







10.0

LED PCB 42W | DALI switch dim
220-240VAC | 50-60Hz | incl. driver
steel powder coated
opal LLDPE body | UL 94 HB std.
glow wire test 630°

IP20 SDCM2 L80|60K 8.80kg

3000K | >80 CRI | 5300lm

	CODE
	213385W4

4000K | >80 CRI | 5600lm

	CODE
	213385W6

OPTIONAL

	CODE
suspension	
set 4m	90015114

longer suspension on request

16.0

LED PCB 84W | DALI switch dim
220-240VAC | 50-60Hz | incl. driver
steel powder coated
opal LLDPE body | UL 94 HB std.
glow wire test 630°

IP20 SDCM2 L80|60K 15.30kg

3000K | >80 CRI | 10600lm

	CODE
	213485W4

4000K | >80 CRI | 11300lm

	CODE
	213485W6

OPTIONAL

	CODE
suspension	
set 4m	90015114

longer suspension on request

OFFICE EDGAR & COOPER | BUREAU GODDEERIS ARCHITECTEN KORTRIJK | BELGIUM

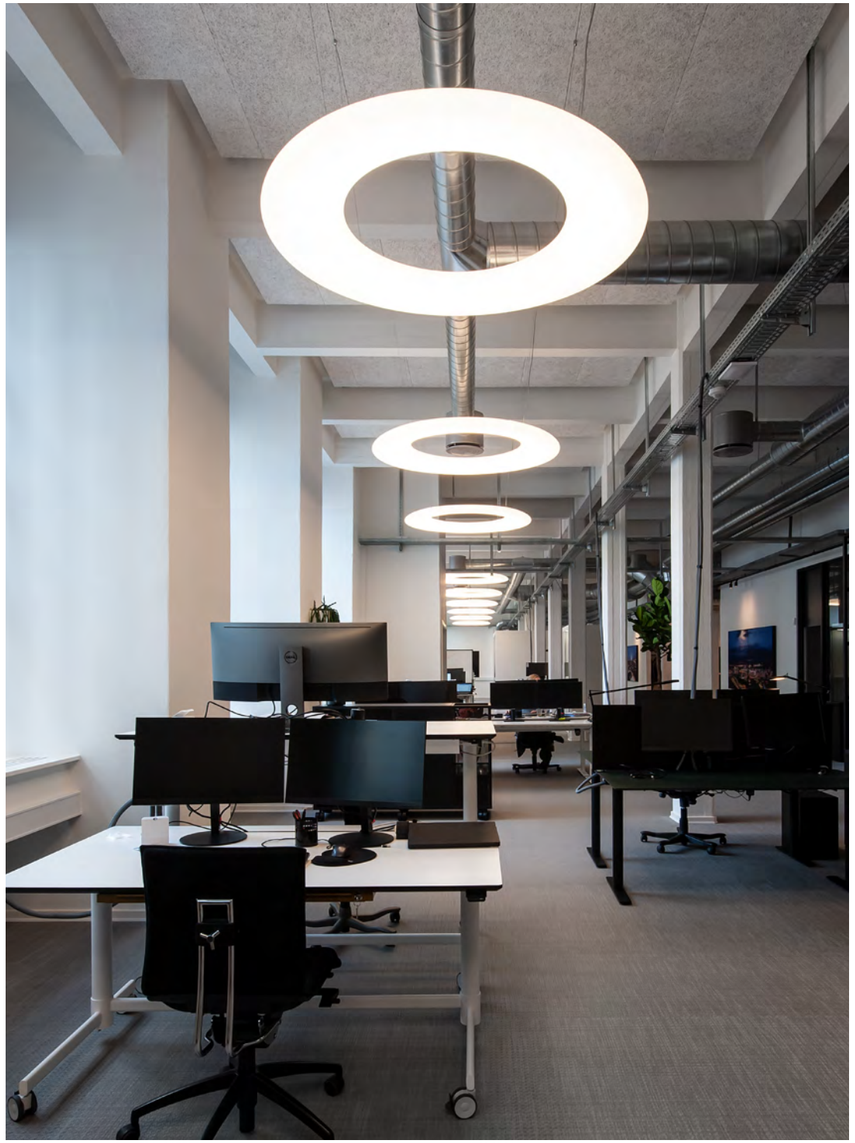

COLLIERS INTERNATIONAL | ARCHITECT HELLE NØHR | ANKER & CO COPENHAGEN | DENMARK

back

WALL RECESSED

476 — 489

WALL RECESSED



RETO
479



LITO 1.0
481

LITO 2.0
481



STRIPE
483



STRANGE
485



THEMIS
487



ORIS
489

back



PRIVATE RESIDENCE SWEDEN

RETO

WALL RECESSED





0.8

LED PCB 3W | 350mA | 9V
excl. driver
aluminium powder coated

IP20 SDCM3 L80|50K 0.27kg

66x66 40 4-40

3000K | >90 CRI | 130lm

	CODE
	345161W5
	345161B5

2.0

LED PCB 6W | 350mA | 18V
excl. driver
aluminium powder coated

IP20 SDCM3 L80|50K 0.41kg

47x182 40 4-40

3000K | >90 CRI | 490lm

	CODE
	345261W5
	345261B5



ALWAYS USE

driver

	CODE
6W | 350mA	90213202

more options and specs on page 724

ALWAYS USE

driver

	CODE
6W | 350mA	90213202

more options and specs on page 724

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012047

concrete housing

	CODE
	90012046

specs on page 736

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012043

concrete housing

	CODE
	90012042

specs on page 736

615

659

back



PRIVATE RESIDENCE | BAUBUREAU OG 27 AG | LINEAR 54 CHUR SWITZERLAND

LITO

WALL RECESSED







1.0

LED PCB 2/3W | 350/500mA | 6V
excl. driver
aluminium powder coated | anod.

IP20 SDCM3 L80|60K 0.09kg

70x70 35 min.12

3000K | >80 CRI | 145/200lm

	CODE
	145381W4
	145381A4
	145381B4

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 500mA	90214201

more options and specs on page 724

OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119

recessed housing | always use in combination with plasterkit

2.0

LED PCB 2/3W | 350/500mA | 6V
excl. driver
aluminium powder coated | anod.

IP20 SDCM3 L80|60K 0.09kg

70x70 35 min.12

3000K | >80 CRI | 75/100lm

	CODE
	145481W4
	145481A4
	145481B4

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 500mA	90214201

more options and specs on page 724

OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119

recessed housing | always use in combination with plasterkit

back



PRIVATE RESIDENCE | KILLIAN GARTNER | ROOMS ATELIER AUSTRIA

STRIPE

WALL RECESSED

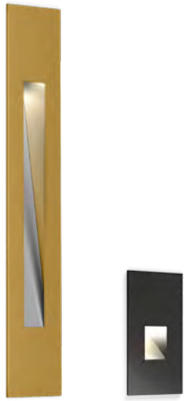







0.4

LED PCB 1/2W | 350/700mA | 3V
excl. driver
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|60K 0.09kg

25x56 40 8-18

3000K | >80 CRI | 11/20lm

	CODE
	305451W4
	305451L4
	305451G4
	305451B4

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 700mA	90215203

more options and specs on page 724

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012037

specs on page 736

0.7

LED PCB 1/2W | 350/700mA | 3V
excl. driver
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|60K 0.10kg

25x56 40 8-18

3000K | >80 CRI | 11/20lm

	CODE
	305551W4
	305551L4
	305551G4
	305551B4

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 700mA	90215203

more options and specs on page 724

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012037

specs on page 736

2.2

LED PCB 1/2W | 350/700mA | 3V
excl. driver
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|60K 0.27kg

25x170 40 8-18

3000K | >80 CRI | 17/27lm

	CODE
	305651W4
	305651L4
	305651G4
	305651B4

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 700mA	90215203

more options and specs on page 724

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012038

specs on page 736



PRIVATE RESIDENCE | VIVERE LICHT ROBERT STEINBÖCK AUSTRIA



1.7 | 2.7



1.7 | 2.7



STRANGE

WALL RECESSED



1.7

LED PCB 4/5W | 500/700mA | 6V
excl. driver
aluminium powder coated
incl. plasterkit

IP20 SDCM2 L80|60K 0.24kg

170x86 55 2-25

	CODE
	320771W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	150/190	>80	2
3000K	165/210	>80	4

ALWAYS USE

driver

	CODE
6W | 500mA	90214201
6W | 700mA	90215203

more options and specs on page 725



2.7

LED PCB 4/5W | 500/700mA | 6V
excl. driver
aluminium powder coated
incl. plasterkit

IP20 SDCM2 L80|60K 0.31kg

270x86 55 2-25

	CODE
	320871W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	150/190	>80	2
3000K	165/210	>80	4

ALWAYS USE

driver

	CODE
6W | 500mA	90214201
6W | 700mA	90215203

more options and specs on page 725

back

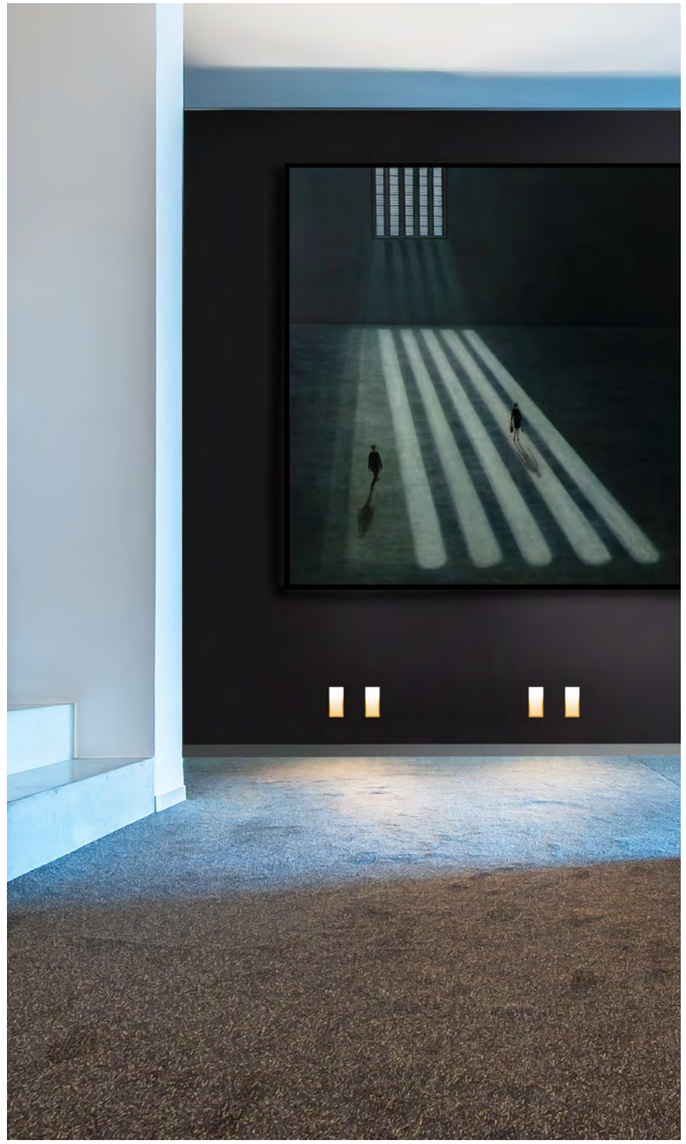

SHOWROOM | GRANDO KEUKENS BRUGGE | BELGIUM



1.7 | 2.7



1.7 | 2.7





THEMIS

WALL RECESSED



1.7

LED PCB 4/5W | 500/700mA | 6V
excl. driver
aluminium powder coated

IP20 SDCM2 L80|60K 0.24kg

70x158 50 2-18

	CODE
	323771W_
	323771K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	150/190	>80	2
3000K	165/210	>80	4

ALWAYS USE

driver

	CODE
6W | 500mA	90214201
6W | 700mA	90215203

more options and specs on page 725

OPTIONAL

plasterkit

	CODE
	90017111

recessed housing incl. plasterkit

	CODE
	90012032

specs on page 734



2.7

LED PCB 4/5W | 500/700mA | 6V
excl. driver
aluminium powder coated

IP20 SDCM2 L80|60K 0.31kg

70x258 50 2-18

	CODE
	323871W_
	323871K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	150/190	>80	2
3000K	165/210	>80	4

ALWAYS USE

driver

	CODE
6W | 500mA	90214201
6W | 700mA	90215203

more options and specs on page 725

OPTIONAL

plasterkit

	CODE
	90017112

recessed housing incl. plasterkit

	CODE
	90012033

specs on page 734

back



PRIVATE RESIDENCE | HELLE FLOU DENMARK



ORIS

WALL RECESSED







0.7

LED PCB 2/4W | 350/700mA | 6V
excl. driver
aluminium powder coated

IP20 SDCM3 L70|60K 0.28kg

47x182 40 12-40

3000K | >80 CRI | 55/80lm

	CODE
	327161W4
	327161B4

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 700mA	90215203

more options and specs on page 724

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012039

concrete housing

	CODE
	90012044

specs on page 736

0.8

LED PCB 2/4W | 350/700mA | 6V
excl. driver
aluminium powder coated

IP65 SDCM3 L70|60K 0.15kg

66x66 40 12-40

3000K | >80 CRI | 120/160lm

	CODE
	327461W4
	327461B4

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 700mA	90215203

more options and specs on page 724

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012047

concrete housing

	CODE
	90012046

specs on page 736

1.3

LED PCB 3/6W | 350/700mA | 9V
excl. driver
aluminium powder coated

IP20 SDCM3 L70|60K 0.34kg

115x117 40 12-40

3000K | >80 CRI | 190/300lm

	CODE
	327661W4
	327661B4

ALWAYS USE

driver

	CODE
6W | 350mA	90213202
6W | 700mA	90215203

more options and specs on page 724

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012041

concrete housing

	CODE
	90012040

specs on page 736

619

back

WALL SURFACE

490 — 579

WALL SURFACE SPOTLIGHTS



ODREY 1.0
495



ODREY 2.0
497



RAY MINI
501



RAY
503



BOX MINI
509



BOX
511



DOCUS MINI
517



HEXO MINI
519



TRACE
521

TRAIN
525



CENTRAL
527



SARA SNOOZE
529



MATCH SNOOZE
533



MICK SNOOZE
535

MICK WALL 1.0
537

WALL SURFACE LUMINAIRES



LEENS
539



BENTO
541



DOMINO
543



SCAVA
545



DOT
547



FINLIN 1.0
551



FINLIN 4.0
551



CLEA
555



CLOCK
557



TAPIS
559



MILES ROUND
563



MILES CARRÉ
567



MILES 9.0
569



VENN
571



DARF
575

WALL SURFACE IP-RATED

MIRBA IP44
577



MIRBI LONG IP44
579

DESIGNER FAMILIES



ROOMOR
37



MIRRO
59



DRO
75



WIRO
111



J.J.W.
119



MIX AND MATCH
weverducre.com/odrey-configurator

SHE LIGHTS UP EVERY ROOM

ODREY ON THE WALL

She exudes the elegance of the 50s like no other. And can change its look faster than any movie star. Who are we talking about? ODREY, of course. She looks stunning in almost any colour combination. And she is highly flexible in terms of the shape of the shade. There are three different shades to choose from, available in black or gold. They can be combined with two mounts in black or gold to create an ever-changing luminaire. ODREY can emit light either upwards, downwards, or in both directions, which is especially lovely. So corridors or restaurant walls can be accentuated with the utmost flair.

Sie versprüht die Eleganz der 50er wie keine andere. Und kann ihren Look schneller wechseln als jeder Filmstar. Von wem hier die Rede ist? Natürlich von ODREY, die in nahezu jeder Farbkombination umwerfend aussieht. Und sich auch in punc-to Schirmform höchst flexibel zeigt. Zur Auswahl stehen drei verschiedene Shades, die in Schwarz oder Gold zu haben sind. Sie können mit je zwei Mountings in Schwarz oder Gold kombi-niert werden und ergeben so immer wieder eine neue Leuchte. Besonders schön: ODREY kann das Licht entweder nach oben, nach unten oder in beide Richtungen abgeben. So können Flure oder Restaurantwände gekonnt akzentuiert werden.

CREATE YOUR VERY OWN ODREY ONLINE

MOUNTING + SHADES

MOUNTING
available in ● white, ● gold or ● black



1.0



2.0

SHADES
available in ● white, ● gold or ● black



3.0
ø 100



4.0
ø 124



5.0
ø 115



3.0 + 3.0



4.0 + 4.0



5.0 + 5.0

back



PRIVATE RESIDENCE GERMANY

ODREY

WALL SURFACE



GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design





MORE COMBINATIONS
weverducre.com/odrey-configurator



1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

IP20 0.30kg

	CODE
	387120WW0
	387120GG0
	387120BB0
	387120GW0
	387120BG0
	387120GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731



1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

IP20 0.34kg

	CODE
	387220WW0
	387220GG0
	387220BB0
	387220GW0
	387220BG0
	387220GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731



1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

IP20 0.36kg

	CODE
	387320WW0
	387320GG0
	387320BB0
	387320GW0
	387320BG0
	387320GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731


345 | 371


437



back



CAFE BREDA | NETHERLANDS

ODREY

WALL SURFACE

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design



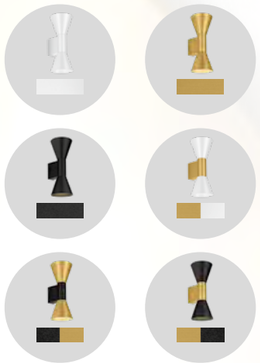



MORE COMBINATIONS

weverducre.com/odrey-configurator



2.3

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

IP20 0.41kg

	CODE
	387420WW0
	387420GG0
	387420BB0
	387420GW0
	387420BG0
	387420GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731



2.4

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

IP20 0.50kg

	CODE
	387520WW0
	387520GG0
	387520BB0
	387520GW0
	387520BG0
	387520GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731



2.5

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
steel and aluminium wet painted

IP20 0.54kg

	CODE
	387620WW0
	387620GG0
	387620BB0
	387620GW0
	387620BG0
	387620GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731



345 | 371



437



back

UNIVERSAL STARS

SIMPLE FORMALITY

HAVE A LOOK
weverducre.com/universal-stars-configurator

Even if maths and angles were never your forte: You'll still love these four stunning geometric shapes. BOX, DOCUS, HEXO and RAY are hard to beat when it comes to elegance and flexibility. And it means they are suitable for almost any room situation. It doesn't matter whether you let them glitter from the ceiling or shine from the walls. As these simple, narrow luminaires do not just come in a great variety of colours, they are also available in many different finishes; including for outdoors. So, right from the entrance to your house, friends and family will experience that "Wow" effect. Who would have thought that geometry could be so illuminating?

Auch wenn Mathematik nicht Ihr Lieblingsfach war: Diese vier atemberaubenden geometrischen Formen werden Sie lieben. BOX, DOCUS, HEXO und RAY sind in puncto Eleganz und Flexibilität nämlich kaum zu übertreffen. Und deshalb für nahezu jede Raumsituation geeignet. Ganz egal, ob man sie von der Decke blinzeln oder von den Wänden strahlen lässt. Denn die schlichten, schmalen Leuchten sind nicht nur in verschiedenen tollen Farbtönen, sondern auch in vielen verschiedenen Ausführungen erhältlich. Auch für den Außenbereich. So kann man lieben Freunden und Verwandten schon im Eingangsbereich ein staunendes „Wow" entlocken. Wer hätte gedacht, dass Geometrie so spannend sein kann?



BOX



DOCUS



HEXO



RAY





PRIVATE RESIDENCE SWEDEN

RAY mini

WALL SURFACE







1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.21kg

	CODE
	300220W0
	300220L0
	300220G0
	300220P0
	300220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.36kg

	CODE
	301220W0
	301220L0
	301220G0
	301220P0
	301220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731









EST LIGHTING SHOWROOM | CHRISTOPHER ELLIOT DESIGN MELBOURNE | AUSTRALIA

RAY

WALL SURFACE

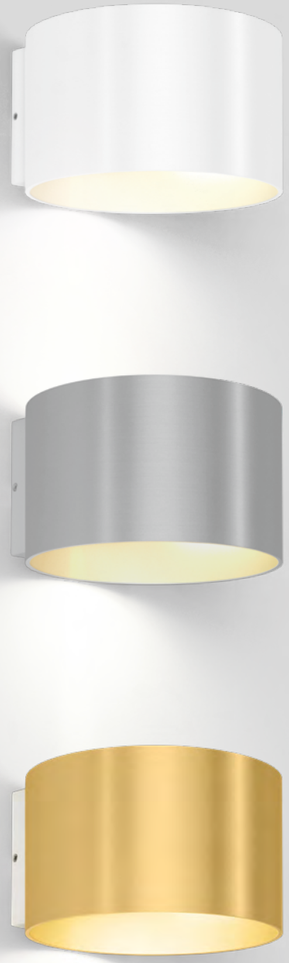







1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.62kg

	CODE
	3221G0W0
	3221G0L0
	3221G0G0
	3221G0Q0
	3221G0P0
	3221G0B0

OPTIONAL

flaps for adjustable beam angle

	CODE
	900401W0

QT14 3.5W | G9 | phase-cut dim

	CODE
3000K | 250lm	9010G804

more lamps and specs on page 732

1.0 LED

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|50K 0.62kg

	CODE
	342168W_
	342168L_
	342168G_
	342168Q_
	342168P_
	342168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	400 | >90	3
3000K	440 | >90	5
1800-2850K	400 | >90	9

2.0 LED

2x LED PCB 3W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|50K 0.69kg

	CODE
	342148W_
	342148L_
	342148G_
	342148Q_
	342148P_
	342148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x200 | >90	3
3000K	2x220 | >90	5
1800-2850K	2x200 | >90	9

231
377 | 389
411
599
633

back



OFFICE MORGAN MCKINLEY | INTERIOR DESIGN VALMONT SYDNEY | AUSTRALIA

RAY

WALL SURFACE







4.0 LED

LED 2x LED PCB 3W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|50K 0.85kg

	CODE
	342248W_
	342248L_
	342248G_
	342248Q_
	342248P_
	342248B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x200 | >90	3
3000K	2x220 | >90	5
1800-2850K	2x200 | >90	9

231
377 | 389
411
599
633
back





PRIVATE RESIDENCE | 3ARCHITECTEN BELGIUM

BOX mini

WALL SURFACE









1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.24kg

	CODE
	300120W0
	300120L0
	300120G0
	300120P0
	300120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.44kg

	CODE
	301120W0
	301120L0
	301120G0
	301120P0
	301120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

back



PRIVATE RESIDENCE | THE ART OF LIVING MAGAZINE NETHERLANDS

BOX

WALL SURFACE













1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.66kg

	CODE
	3211G0W0
	3211G0L0
	3211G0G0
	3211G0Q0
	3211G0P0
	3211G0B0

1.0 LED

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|50K 0.60kg

	CODE
	341168W_
	341168L_
	341168G_
	341168Q_
	341168P_
	341168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	400 | >90	3
3000K	440 | >90	5
1800-2850K	400 | >90	9

2.0 LED

2x LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|50K 0.67kg

	CODE
	341148W_
	341148L_
	341148G_
	341148Q_
	341148P_
	341148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x200 | >90	3
3000K	2x220 | >90	5
1800-2850K	2x200 | >90	9

OPTIONAL

flaps for adjustable beam angle

	CODE
	900401W0

QT14 3.5W | G9 | phase-cut dim

	CODE
3000K | 250lm	9010G804

more lamps and specs on page 732

239
413
605
649

back



VINARIJA GALIĆ | DVA ARHITEKTA KUTJEVO | CROATIA

back



HOTEL DOMAINE DE LA VOISINE | CYRIL DURAND BEHAR ARCHITECTES | DISTYLIGHT CLAIREFONTAINE-EN-YVELINES FRANCE



BOX

WALL SURFACE



4.0 LED

LED 2x LED PCB 3W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L70|50K 0.86kg

	CODE
	341248W_
	341248L_
	341248G_
	341248Q_
	341248P_
	341248B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x200	>90	3
3000K	2x220	>90	5
1800-2850K	2x200	>90	9

239
413
605
653

back



HOTEL DOMAINE DE LA VOISINE | CYRIL DURAND BEHAR ARCHITECTES | DISTYLIGHT FRANCE

DOCUS mini

WALL SURFACE











1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.24kg

	CODE
	300320W0
	300320L0
	300320G0
	300320P0
	300320B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.43kg

	CODE
	301320W0
	301320L0
	301320G0
	301320P0
	301320B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731



PRIVATE RESIDENCE | MARTIJN ENSINK - MAEN INTERIORS NETHERLANDS

HEXO mini

WALL SURFACE











1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.23kg

	CODE
	300420G0
	300420Q0
	300420P0
	300420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 0.40kg

	CODE
	301420G0
	301420Q0
	301420P0
	301420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731

back



PRIVATE RESIDENCE SPAIN

TRACE

WALL SURFACE











1.0

LED LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 22° SDCM3 L80|50K 0.42kg

	CODE
	333164W_
	333164H_
	333164CH_
	333164B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	535	>90	3
3000K	564	>90	5

2.0

LED 2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 22° SDCM3 L80|50K 0.74kg

	CODE
	333264W_
	333264H_
	333264CH_
	333264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x500	>90	3
3000K	2x530	>90	5

back



PRIVATE RESIDENCE SWEDEN







TRAIN

WALL SURFACE





1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 36° SDCM3 L80|50K 0.24kg

2700K | >90 CRI | 390lm

	CODE
	306868W3
	306868G3
	306868B3

3000K | >90 CRI | 420lm

	CODE
	306868W5
	306868L5

2.0

2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 36° SDCM3 L80|50K 0.35kg

2700K | >90 CRI | 2x245lm

	CODE
	306968W3
	306968G3
	306968B3

3000K | >90 CRI | 2x255lm

	CODE
	306968W5
	306968L5







back

CENTRAL

WALL SURFACE







1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80|60K 0.56kg

	CODE
	313574W_
	313574L_
	313574G_
	313574B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	520	>90	5

2.0

2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80|60K 0.50kg

	CODE
	313674W_
	313674L_
	313674G_
	313674B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x270	>90	3
3000K	2x290	>90	5

639

back



HOTEL SALZBURG | AUSTRIA

SARA snooze

WALL SURFACE





281



361







W



G



K



B

back

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
incl. switch on/off

IP20 0°-90°|330° 0.33kg

	CODE
	157320W0
	157320G0
	157320K0
	157320B0

OPTIONAL

PAR16 6.5W | GU10

	CODE
2700K | 460lm	901228W3
2700K | 437lm	901228B3
3000K | 500lm	901228W5
3000K | 457lm	901228B5

more lamps and specs on page 731





PRIVATE RESIDENCE | IMORE. BELGIUM

MATCH snooze

WALL SURFACE







187



289



325





1.0

LED COB 5W
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
incl. switch on/off

IP20 0°-90°|350° 25° SDCM2 L80|50K 0.24kg

	CODE
	177354W_
	177354B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	330	>90	3
3000K	350	>90	5

back

HOTEL MANCHESTER | UNITED KINGDOM

MICK snooze

WALL SURFACE

reddot winner 2020
lighting design

DESIGN AWARD 2021











1.0

LED COB 8W
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
incl. switch on/off

IP20 0°-90°|350° 18° SDCM2 L80|50K 0.39kg

	CODE
	159643J_
	159643K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	180	>90	3
3000K	200	>90	5

S&R CORNELISSEN

back



ETXE AUNDI JATETXEA | NORTH HOME STUDIO OÑATI | SPAIN

MICK

WALL SURFACE

reddot winner 2020
lighting design

DESIGN AWARD 2021













1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-90°|350° 18° SDCM2 L80|50K 0.35kg

	CODE
	159344J_
	159344K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	225	>90	3
3000K	245	>90	5

2.0

2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 0°-90°|350° 18° SDCM2 L80|50K 0.62kg

	CODE
	159244J_
	159244K_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x225	>90	3
3000K	2x245	>90	5



OFFICE CEEBE | WEYGERS HASSELT | BELGIUM

LEENS

WALL SURFACE









1.0

LED LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80|60K 1.11kg

3000K | >90 CRI | 425lm

	CODE
	311174W5
	311174L5
	311174B5

2.0

LED 2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80|60K 0.90kg

3000K | >90 CRI | 2x250lm

	CODE
	311274W5
	311274L5
	311274B5

back



PRIVATE RESIDENCE GERMANY

BENTO

WALL SURFACE

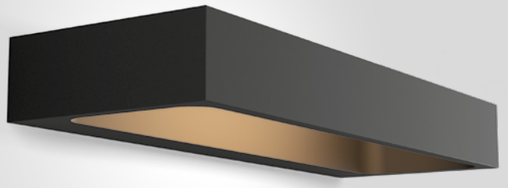







1.3

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 SDCM3 L80|60K 0.74kg

3000K | >90 CRI | 270lm

	CODE
	309274W5
	309274B5

3.6

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 SDCM3 L80|60K 1.48kg

3000K | >90 CRI | 270lm

	CODE
	309374W5
	309374B5

back



PRIVATE RESIDENCE BELGIUM

DOMINO

WALL SURFACE





1.0

LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP20 57° SDCM3 L80|50K 0.72kg

	CODE
	337174W_
	337174B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1140	>80	2
3000K	1235	>80	4



back



PRIVATE RESIDENCE AUSTRIA

SCAVA

WALL SURFACE







1.0

LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PC cover

IP20 SDCM2 L80|50K 0.42kg

	CODE
	350188W_
	350188K_
	350188B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1880	>90	3
3000K	1960	>90	5

back



PRIVATE RESIDENCE ESTONIA

DOT

WALL SURFACE

Delta Selection
ADI Awards 2022





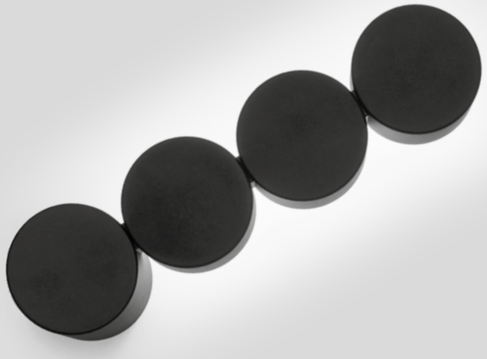







2.0

LED LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC cover

IP20 SDCM3 L80|50K 0.34kg

	CODE
	330164W_
	330164M_
	330164Q_
	330164B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	420	>90	5

3.0

LED 2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC cover

IP20 SDCM3 L80|50K 0.49kg

	CODE
	330264W_
	330264M_
	330264Q_
	330264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x400	>90	3
3000K	2x420	>90	5

4.0

LED 3x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
PC cover

IP20 SDCM3 L80|50K 0.67kg

	CODE
	330464W_
	330464M_
	330464Q_
	330464B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x400	>90	3
3000K	3x420	>90	5

back



HOTEL PARIS | FRANCE

back



PRIVATE RESIDENCE FINLAND

FINLIN

WALL SURFACE

GOOD DESIGN

As awarded by The Chicago Athenaeum:
Museum of Architecture and Design











1.0

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|60K 0.15kg

	CODE
	370584K_
	370584B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	350	>90	3
3000K	380	>90	5

2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|60K 0.18kg

	CODE
	370684K_
	370684B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	700	>90	3
3000K	760	>90	5

3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|60K 0.30kg

	CODE
	370784K_
	370784B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	700	>90	3
3000K	760	>90	5

4.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA diffuser

IP20 SDCM3 L80|60K 0.20kg

	CODE
	370884K_
	370884B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	700	>90	3
3000K	760	>90	5

back

OFFICE GERMANY

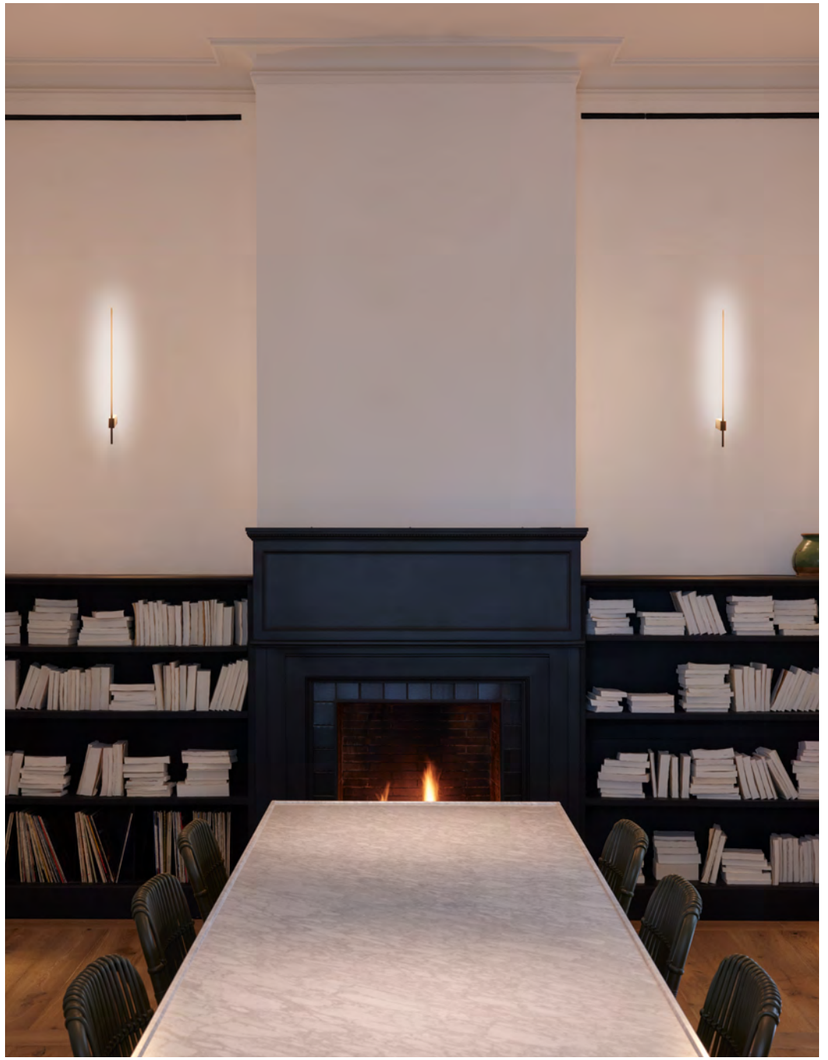

VILLA MAYFAIR BARCELONA | SPAIN



PRIVATE RESIDENCE POLAND

CLEA

WALL SURFACE

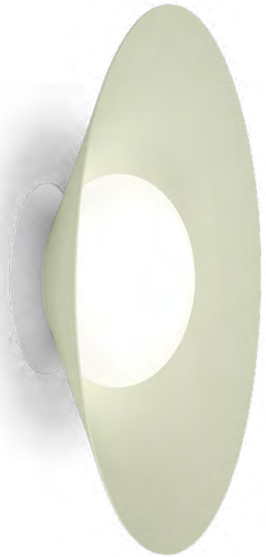







1.0

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 0.78kg

	CODE
	181484W_
	181484SG_
	181484FJ_
	181484B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	610 | >90	3
3000K	655 | >90	5

2.0

LED COB 10W| phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 1.31kg

	CODE
	181584W_
	181584SG_
	181584FJ_
	181584B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	610 | >90	3
3000K	655 | >90	5

3.0

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 2.09kg

	CODE
	181684W_
	181684SG_
	181684FJ_
	181684B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	610 | >90	3
3000K	655 | >90	5

299

back



FASHION STORE AUSTRIA

CLOCK

WALL SURFACE

301









1.0

LED LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 0.66kg

	CODE
	182584B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	645	>90	3
3000K	665	>90	5

2.0

LED LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 0.76kg

	CODE
	182684B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	645	>90	3
3000K	665	>90	5

3.0

LED LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | steel wet painted
white opal glass hand blown

IP20 SDCM2 L80|50K 1.00kg

	CODE
	182784B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	645	>90	3
3000K	665	>90	5

back



PRIVATE CLINIC DUSSELDORF | GERMANY

TAPIS

WALL SURFACE

Delta Selection
ADI Awards 2022

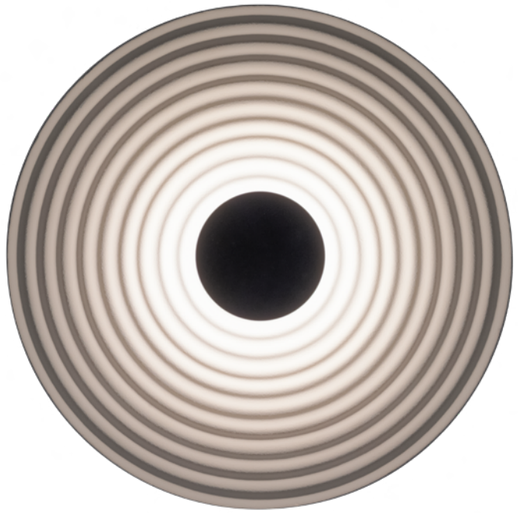







1.0

LED PCB 8W | phase-cut dim 220-240VAC | 50-60Hz | incl. driver composite | aluminium powder coated

IP20 SDCM3 L80|50K 1.8kg

	CODE
	336164FJ_
	336164MG_
	336164PS_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	534	>90	5

2.0

LED PCB 8W | phase-cut dim 220-240VAC | 50-60Hz | incl. driver composite | aluminium powder coated

IP20 SDCM3 L80|50K 1.95kg

	CODE
	336264FJ_
	336264MG_
	336264PS_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	534	>90	5

3.0

LED PCB 8W | phase-cut dim 220-240VAC | 50-60Hz | incl. driver composite | aluminium powder coated

IP20 SDCM3 L80|50K 1.7kg

	CODE
	336364FJ_
	336364MG_
	336364PS_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	534	>90	5



HOTEL VIENNA | AUSTRIA



LAMOTE STRAGIER ADVOCATEN | ADINS VAN LOOVEREN ARCHITECTEN KORTRIJK | BELGIUM

MILES

WALL SURFACE







10mm cover thickness marble



5mm cover thickness aluminium



2.0 ROUND

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 0.70kg | 1.24kg

		CODE
		317578W_
		317578G_
		317578Q_
		317578P_
		317578B_
	marble	317578MW_
	marble	317578MB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	525	>90	3
3000K	525	>90	5



3.0 ROUND

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 1.07kg | 1.92kg

		CODE
		317778W_
		317778G_
		317778Q_
		317778P_
		317778B_
	marble	317778MW_
	marble	317778MB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	525	>90	3
3000K	525	>90	5

back





HOTEL STEIGENBERGER | ROOMS GMBH KREMS | AUSTRIA

MILES

WALL SURFACE







10mm cover thickness marble



5mm cover thickness aluminium



2.0 CARRÉ

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 1.01kg | 2.11kg

		CODE
		317478W_
		317478G_
		317478Q_
		317478P_
		317478B_
	marble	317478MW_
	marble	317478MB_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	525 | >90	3
3000K	525 | >90	5



3.0 CARRÉ

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM2 L80|50K 1.56kg | 3.39kg

		CODE
		317678W_
		317678G_
		317678Q_
		317678P_
		317678B_
	marble	317678MW_
	marble	317678MB_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	525 | >90	3
3000K	525 | >90	5

back



PRIVATE RESIDENCE UKRAINE

MILES

WALL SURFACE

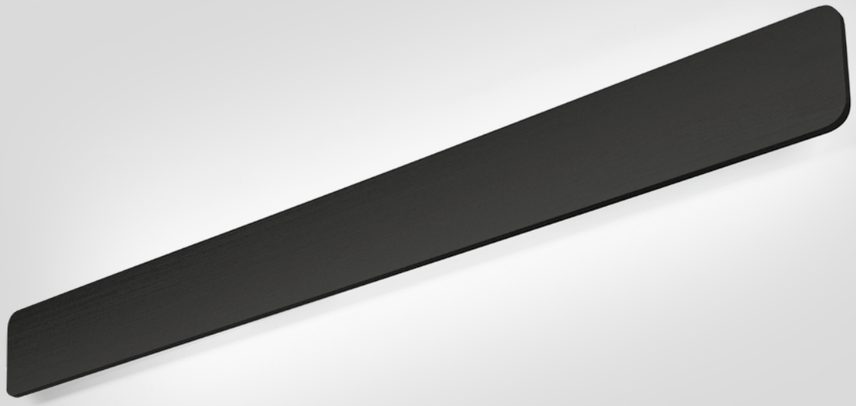



9.0

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80|50K 2.01kg

	CODE
	317878W_
	317878G_
	317878B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1200	>90	3
3000K	1220	>90	5



12.0

LED PCB 25W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
brushed wet painted

IP20 SDCM3 L80|50K 2.60kg

	CODE
	317978W_
	317978G_
	317978B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1560	>90	3
3000K	1580	>90	5



5mm cover
thickness
aluminium

back

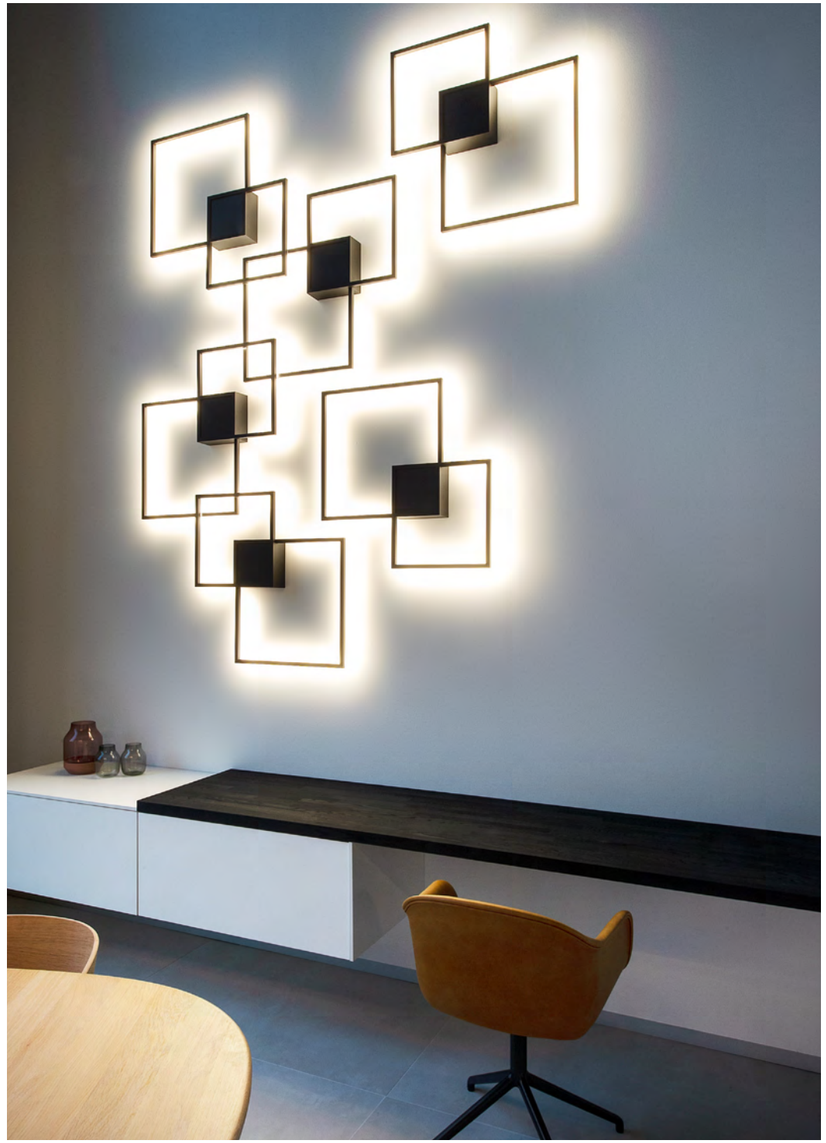

SHOWROOM GRANDO KEUKENS SINT-MARTENS-LATEM | BELGIUM

VENN

WALL SURFACE

DESIGN AWARD 2016

GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

303

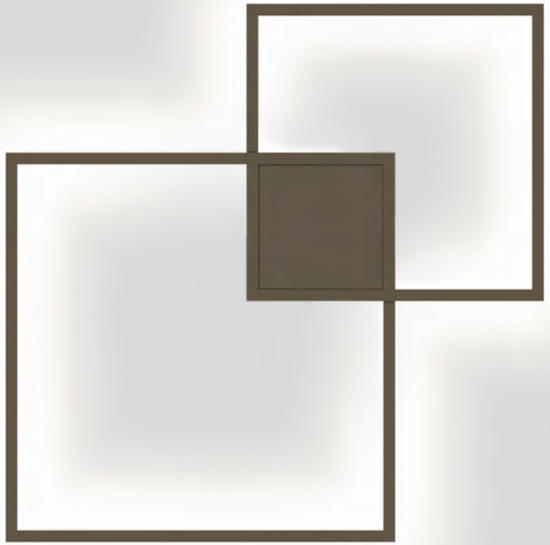



1.0

LED LED PCB 38W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover indirect light

IP20 SDCM3 L80|60K 2.50kg

	CODE
	149184W_
	149184Q_
	149184B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2950	>80	2
3000K	3140	>80	4



2.0

LED LED PCB 47W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal PMMA cover dir./indir. light

IP20 SDCM3 L80|60K 2.50kg

	CODE
	149284W_
	149284Q_
	149284B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540/2950	>80	2
3000K	580/3140	>80	4

MORE OPTIONS
weverducre.com/venn-configurator

S&R CORNELISSEN

back



▶ **DESIGN WITH LOVE**

CASA LLAMP | MALLORCA PRIME MALLORCA | SPAIN

back



MUSEUM LONDON | UNITED KINGDOM

DARF

WALL SURFACE

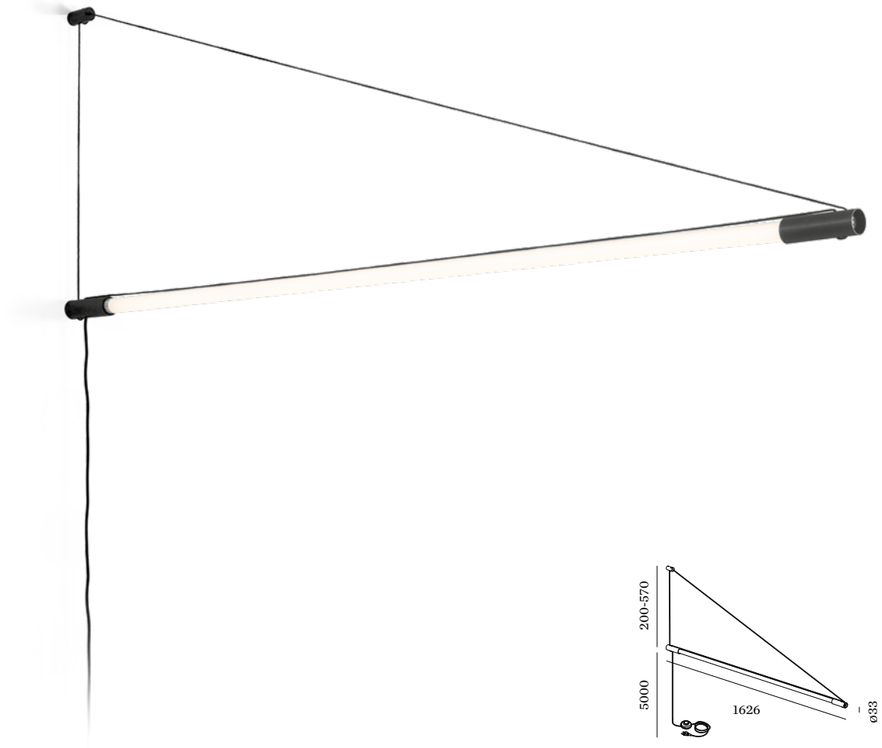

469

1.1

LED TUBE 22W | non dim
220-240VAC | 50-60Hz
aluminium powder coated
black textile cable plug with
switch

IP20 SDCM5 L70|60K 0.33kg

3000K | >80 CRI | 3300lm

CODE 2563T7B4

4000K | >80 CRI | 3700lm

CODE 2563T7B6



1.2

LED TUBE 22W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
black textile cable plug with
dimmer switch

IP20 SDCM5 L70|60K 0.33kg

2700K | >90 CRI | 1920lm

CODE 2563T8B3

3000K | >90 CRI | 2095lm

CODE 2563T8B5

non-dim

phase-cut dim

project picture application
without cable

ARCHITECT | PHILIPP WEINBERGER & STUDIO MARCH GUT

back



RESTAURANT GOTHENBURG | SWEDEN

MIRBA IP44

WALL SURFACE











opal PMMA



E
black end cap
and black housing

1.0

LED LED PCB 6/9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector

IP44 SDCM2 L70|60K 0.51kg

	CODE
	328188W_
	328188E_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 320/H 560	>90	3
3000K	L 360/H 620	>90	5

2.0

LED LED PCB 7/12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector

IP44 SDCM2 L70|60K 0.65kg

	CODE
	328288W_
	328288E_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 530/H 820	>90	3
3000K	L 590/H 900	>90	5

3.0

LED LED PCB 12/18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector

IP44 SDCM2 L70|60K 0.69kg

	CODE
	328388W_
	328388E_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 610/H 1050	>90	3
3000K	L 680/H 1150	>90	5

back



OFFICE VIENNA | AUSTRIA

MIRBI long IP44

WALL SURFACE

223

313









1.0

LED PCB 4/6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector

IP44 SDCM3 L70|50K 0.72kg

CODE 329188W_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	L 190/H 300 | >90	3
3000K	L 210/H 330 | >90	5

2.0

LED PCB 7/12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector

IP44 SDCM3 L70|50K 1.53kg

CODE 329288W_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	L 320/H 550 | >90	3
3000K	L 365/H 620 | >90	5

3.0

LED PCB 12/18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA | output selector

IP44 SDCM3 L70|50K 2.25kg

CODE 329388W_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	L 550/H 750 | >90	3
3000K	L 610/H 840 | >90	5



outside clear,
inside opal
PMMA

back

OUT
DOOR

CEILING RECESSED

582 — 589

CEILING RECESSED



DEEP BIJOU IP65
585



DEEP IP65
585



TAIO IP65
587



INTRA
589

back



PRIVATE RESIDENCE AUSTRIA

DEEP bijou IP65 | DEEP IP65

OUTDOOR
CEILING RECESSED

139 | 205











1.0 BIJOU

LED COB 5W | 500mA | 8V
excl. driver
aluminium powder coated

IP65 30° SDCM2 L80|50K 0.09kg

wire springs 50-52 85 4-25

	CODE
	165361W_
	165361Q_
	165361B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	470 | >90	3
3000K	495 | >90	5

ALWAYS USE

driver | IP67

	CODE
7W | 500mA	90214301

more options and specs on page 724

1.0

LED COB 6/9W | 350/500mA | 17V
excl. driver
aluminium powder coated

IP65 36° SDCM2 L80|50K 0.24kg

wire springs 86-89 80 4-27

	CODE
	184161W_
	184161B_

blade springs 86-89 80 min 4

	CODE
	184161W_C
	184161B_C

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	485/640 | >90	3
3000K	510/690 | >90	5

ALWAYS USE

driver | IP68

	CODE
17W | 350mA	90213602
24W | 500mA	90214702

more options and specs on page 724

IC rated

back









TAIO IP65

OUTDOOR
CEILING RECESSED


213


311


55

ø77

1.0

LED COB 6/9W | 350/500mA | 18V
excl. driver
aluminium powder coated
opal glass convex lens

IP65 105° SDCM2 L80|50K 0.13kg

wire springs 70 70 4-27

	CODE
	180781W_
	180781G_
	180781B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	250/350 | >90	3
3000K	270/380 | >90	5


597


631

ALWAYS USE

driver | IP68

	CODE
17W | 350mA	90213602
24W | 500mA	90214702

more options and specs on page 724


IC rated

back



PRIVATE RESIDENCE | KILLIAN GARTNER | ROOMS ATELIER AUSTRIA







INTRA

OUTDOOR
CEILING RECESSED





1.0 OPAL

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
opal PMMA cover

IP65 SDCM2 L70|60K 0.15kg

blade springs 76-79 70 8-25

3000K | CRI >90 | 350lm

	CODE
	733188W5
	733188A5
	733188B5

2.0 SPOT

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
clear lens

IP65 38° SDCM3 L70|50K 0.15kg

blade springs 76-79 70 8-25

3000K | CRI >80 | 490lm

	CODE
	733268W4
	733268A4
	733268B4

back

CEILING SURFACE

590 — 611

CEILING SURFACE SPOTLIGHTS



TRAM
593



TUBE
595



TAIO
597



RAY
599



TRAIN
601



TUBE CARRÉ
603



BOX
605

CEILING SURFACE LUMINAIRES



ROB
609



BLAS 1.0
611

BLAS 2.0
611



TRAM

OUTDOOR
CEILING SURFACE





1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 36° SDCM3 L70|50K 0.24kg

3000K | >90 CRI | 490lm

	CODE
	747768W5
	747768A5
	747768Q5
	747768B5



PRIVATE RESIDENCE BELGIUM

back

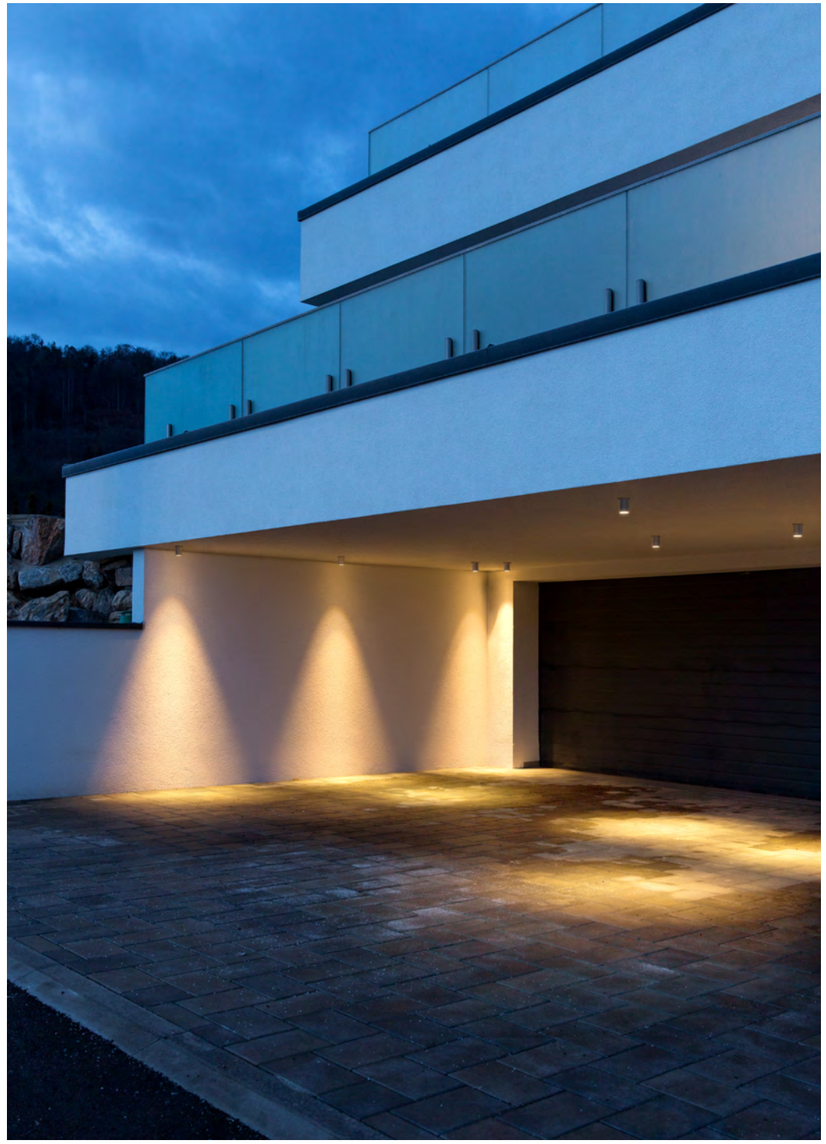

PRIVATE RESIDENCE AUSTRIA

TUBE

OUTDOOR
CEILING SURFACE







1.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80|60K 0.56kg

3000K | >90 CRI | 629lm

	CODE
	734364W5
	734364D5
	734364A5
	734364B5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP65 0.49kg

	CODE
	734120W0
	734120D0
	734120A0
	734120Q0
	734120B0

OPTIONAL

PAR16 4.3W | GU10

	CODE
2700K | 350lm	905227S2
3000K | 350lm	905227S4

more lamps and specs on page 731



reflector

back



PRIVATE RESIDENCE BELGIUM

TAIO

OUTDOOR
CEILING SURFACE



213
311



587
631

1.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal glass convex lens

IP65 105° SDCM2 L80|50K 0.55kg

	CODE
	180884W_
	180884A_
	180884Q_
	180884B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	410 | >90	3
3000K	440 | >90	5

back



SHOP PHILMODE | ERIC FRANSSENS BEAUFAYS | BELGIUM

RAY

OUTDOOR
CEILING SURFACE







inner cover

OPTIONAL

inner cover

	CODE
	911041W1
	911041D1
	911041A1
	911041B1

1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 32° SDCM2 L70|50K 0.63kg

	CODE
	735464W_
	735464D_
	735464A_
	735464B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	580 | >80	2
3000K	610 | >80	4
2000-3000K	715 | >95	9

back


231


377 | 389


411


503




633



PRIVATE RESIDENCE BELGIUM






TRAIN

OUTDOOR
CEILING SURFACE


525





1.0

LED COB 6W| phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated


635

IP65 36° SDCM3 L70|50K 0.26kg

3000K | >90 CRI | 490lm

	CODE
	718668W5
	718668A5
	718668Q5
	718668B5

back



TUBE CARRÉ

OUTDOOR
CEILING SURFACE










1.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80|60K 0.74kg

3000K | >90 CRI | 629lm

	CODE
	734464W5
	734464D5
	734464A5
	734464B5

1.0 PAR16

PAR16 max. 5W | GU10
220-240VAC | 50-60Hz
aluminium powder coated

IP65 0.67kg

	CODE
	734220W0
	734220D0
	734220A0
	734220Q0
	734220B0

OPTIONAL

PAR16 4.3W | GU10

	CODE
2700K | 350lm	905227S2
3000K | 350lm	905227S4

more lamps and specs on page 731


reflector

643



PRIVATE RESIDENCE FRANCE

BOX

OUTDOOR
CEILING SURFACE



239
413
511
649




inner reflector


inner cover

1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 32° SDCM2 L70|50K 0.67kg

	CODE
	735264W_
	735264D_
	735264A_
	735264Q_
	735264B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	580	>80	2
3000K	610	>80	4
2000-3000K	715	>95	9

OPTIONAL

inner reflector

	CODE
	911211W1
	911211D1
	911211Q1
	911211B1

inner cover

	CODE
	911011W1
	911011D1
	911011Q1
	911011B1

back





PRIVATE RESIDENCE | STIEWE+ENGELS GERMANY

ROB

OUTDOOR
CEILING SURFACE

305







ø160



ø260



ø350

1.6

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L80|60K 0.70kg

CODE 701188W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1130	>90	3
3000K	1150	>90	5

2.6

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L80|60K 1.20kg

CODE 701288W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1800	>90	3
3000K	1810	>90	5

3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
opal PMMA cover

IP44 SDCM2 L80|60K 1.90kg

CODE 701388W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3340	>90	3
3000K	3360	>90	5

OPTIONAL

phase-cut | bluetooth dimmer

CODE
90019100

specs on page 729

back



PRIVATE RESIDENCE | PETER RANEBURGER AUSTRIA

BLAS

OUTDOOR
CEILING SURFACE











clear + frosted glass

1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
clear + frosted glass

IP65 SDCM2 L70|60K 1.00kg

3000K | >80 CRI | 840lm

	CODE
	736387W4
	736387B4

2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
clear + frosted glass

IP65 SDCM2 L80|60K 1.30kg

3000K | >80 CRI | 840lm

	CODE
	736487W4
	736487B4

back

WALL RECESSED

612 — 621

WALL RECESSED



RETO 0.8
615



RETO 1.3
615



RETO 2.0
617



ORIS 0.7
619



ORIS 2.0
619



ORIS 0.8
621



ORIS 1.3
621



PRIVATE RESIDENCE BELGIUM



RETO

OUTDOOR
WALL RECESSED





0.8

LED PCB 6W | const. volt. | 24V
excl. driver
aluminium powder coated

IP65 SDCM3 L80|50K 0.27kg

66x66 40 4-40

3000K | >90 CRI | 105lm

	CODE
	745162A5
	745162Q5
	745162B5

ALWAYS USE

driver | IP67

	CODE
24V	35W	90212802
24V	100W	90212903

specs on page 728

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012047

concrete housing

	CODE
	90012046

specs on page 736

1.3

LED PCB 6W | const. volt. | 24V
excl. driver
aluminium powder coated

IP65 SDCM3 L80|50K 0.43kg

115x117 40 4-40

3000K | >90 CRI | 145lm

	CODE
	745362A5
	745362Q5
	745362B5

ALWAYS USE

driver | IP67

	CODE
24V	35W	90212802
24V	100W	90212903

specs on page 728

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012041

concrete housing

	CODE
	90012040

specs on page 736

479

659

back

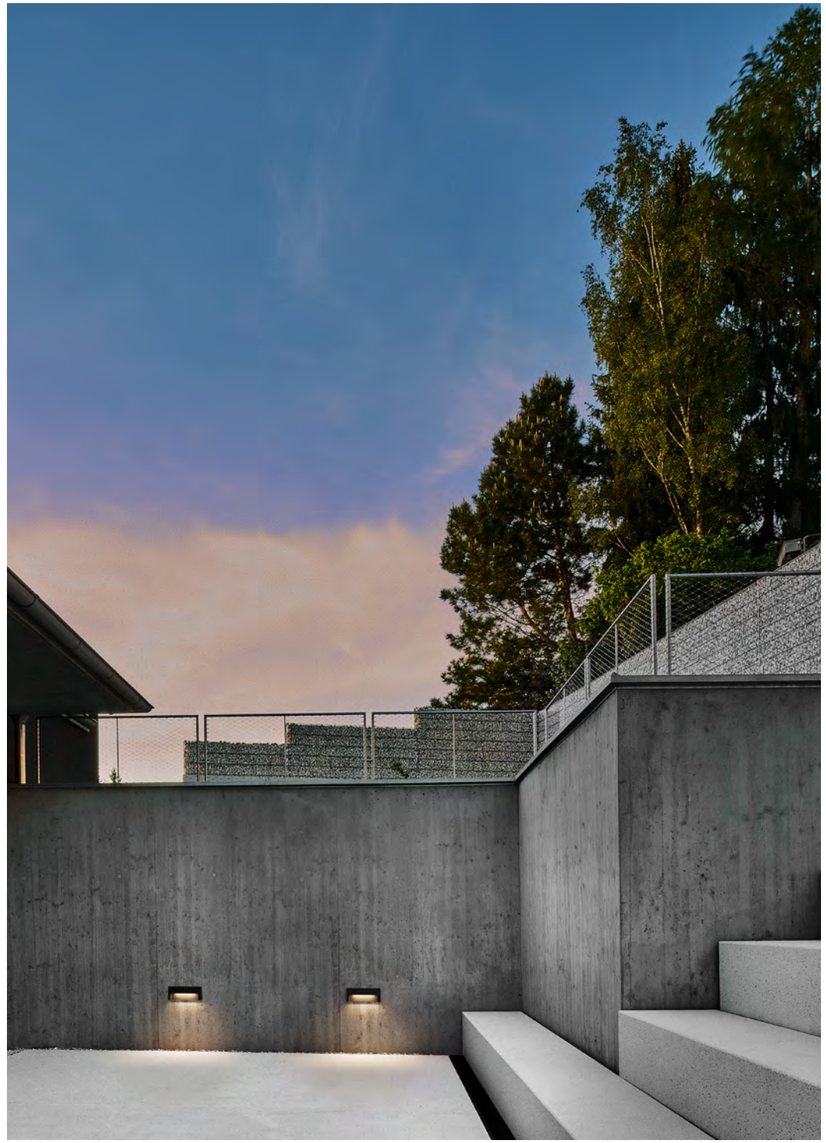

PRIVATE RESIDENCE AUSTRIA

RETO

OUTDOOR
WALL RECESSED



2.0

LED PCB 10W | const. volt. | 24V
excl. driver
aluminium powder coated

IP65 SDCM3 L80|50K 0.41kg

47x182 40 4-40

3000K | >90 CRI | 505lm

	CODE
	745262A5
	745262Q5
	745262B5





A



Q



B

ALWAYS USE

driver | IP67

	CODE
24V	35W	90212802
24V	100W	90212903

specs on page 728

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012043

concrete housing

	CODE
	90012042

specs on page 736

back

479

659



PRIVATE RESIDENCE | SPADO ARCHITECTS AUSTRIA







ORIS

OUTDOOR
WALL RECESSED



0.7

LED PCB 2/4W| 350/700mA | 6V
excl. driver
aluminium powder coated

IP65 SDCM3 L70|60K 0.28kg

47x182 40 12-40

3000K | >80 CRI | 55/80lm

	CODE
	709161W4
	709161D4
	709161B4

ALWAYS USE

driver | IP66

	CODE
3W | 350mA	90213101
7W | 500mA	90214301
7W | 700mA	90215301

more options and specs on page 724

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012039

concrete housing

	CODE
	90012044

specs on page 736



2.0

LED PCB 3/6W | 350/700mA | 9V
excl. driver
aluminium powder coated

IP65 SDCM3 L70|60K 0.42kg

115x185 40 12-40

3000K | >80 CRI | 190/300lm

	CODE
	709761W4
	709761D4
	709761B4

ALWAYS USE

driver | IP66

	CODE
3W | 350mA	90213101
7W | 500mA	90214301
7W | 700mA	90215301

more options and specs on page 724

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012043

concrete housing

	CODE
	90012042

specs on page 736

489

back

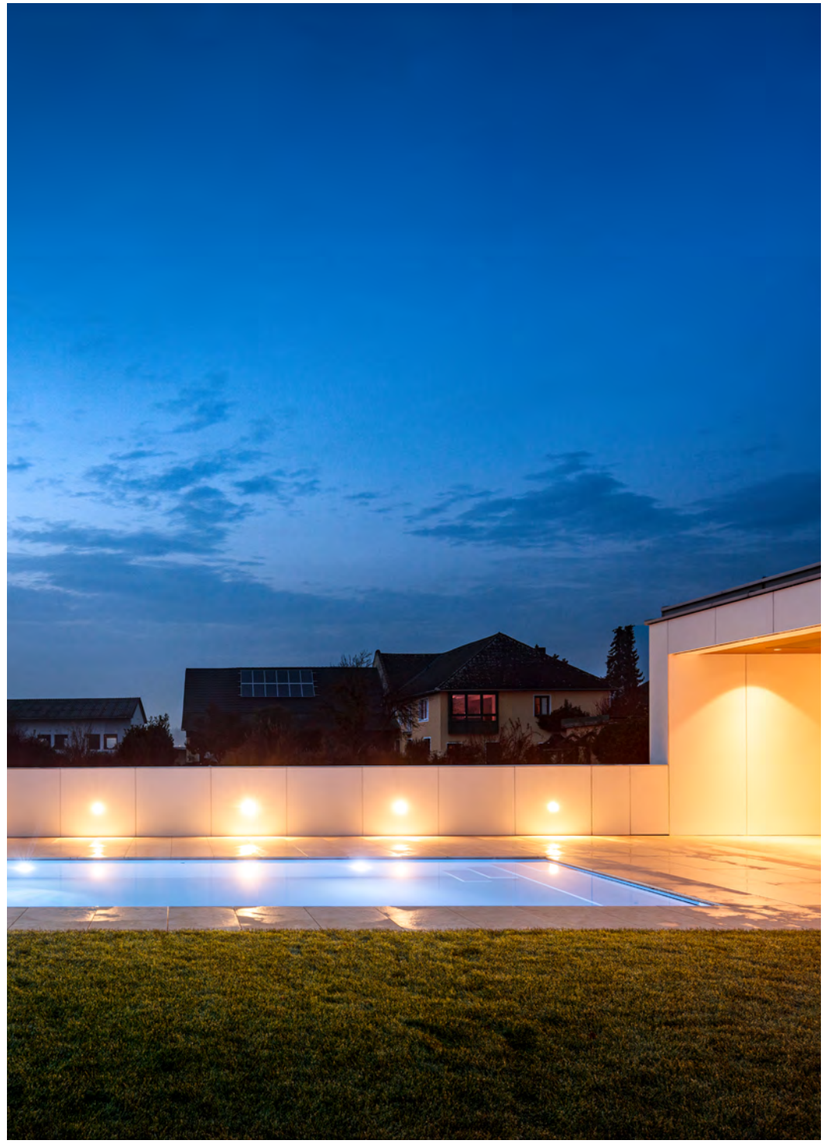

PRIVATE RESIDENCE AUSTRIA







W



D



A



Q



B

ORIS

OUTDOOR
WALL RECESSED





0.8

LED PCB 2/4W | 350/700mA | 6V
excl. driver
aluminium powder coated

IP65 SDCM3 L70|60K 0.15kg

66x66 40 12-40

3000K | >80 CRI | 120/160lm

	CODE
	709461W4
	709461A4
	709461Q4
	709461B4

ALWAYS USE

driver | IP66

	CODE
3W | 350mA	90213101
7W | 500mA	90214301
7W | 700mA	90215301

more options and specs on page 724

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012047

concrete housing

	CODE
	90012046

specs on page 736

1.3

LED PCB 3/6W | 350/700mA | 9V
excl. driver
aluminium powder coated

IP65 SDCM3 L70|60K 0.34kg

115x117 40 12-40

3000K | >80 CRI | 190/300lm

	CODE
	709661W4
	709661D4
	709661A4
	709661Q4
	709661B4

ALWAYS USE

driver | IP66

	CODE
3W | 350mA	90213101
7W | 500mA	90214301
7W | 700mA	90215301

more options and specs on page 724

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012041

concrete housing

	CODE
	90012040

specs on page 736

489

back

WALL SURFACE

622 — 667

WALL SURFACE SPOTLIGHTS



TRAM
625



TUBE 1.0
627



TUBE 2.0
629



TAIO
631



RAY
633



SWAM
665



GETTON 2.0
667



GETTON 3.0
667



TRAIN
635



CENTRAL
639



STATION
641



TUBE CARRÉ 1.0
643



TUBE CARRÉ 2.0
645



BOX 1.0
649



BOX 3.0
653



BOXX
655



X-BEAM
657

WALL SURFACE LUMINAIRES



RETO
659



PALOS 1.0
661



PALOS 2.0
661



PALOS 3.0
661



TAPE
663

back



PRIVATE RESIDENCE AUSTRIA



1.0



1.0



2.0

TRAM

OUTDOOR
WALL SURFACE











593





W



A



Q



B

1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 36° SDCM3 L70|50K 0.25kg

3000K | >90 CRI | 490lm

	CODE
	747568W5
	747568Q5
	747568A5
	747568B5

2.0

2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 36° SDCM3 L70|50K 0.30kg

3000K | >90 CRI | 2x290lm

	CODE
	747668W5
	747668Q5
	747668A5
	747668B5

back



HOTEL VALAMAR GIRANDELLA RESORT | STUDIO 92 RABAC | CROATIA

TUBE

OUTDOOR
WALL SURFACE






reflector



1.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80|60K 0.53kg

3000K | >90 CRI | 629lm

	CODE
	711364W5
	711364D5
	711364A5
	711364B5



1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP65 0.49kg

	CODE
	711120W0
	711120D0
	711120A0
	711120Q0
	711120B0

OPTIONAL

PAR16 4.3W | GU10

	CODE
2700K | 350lm	905227S2
3000K | 350lm	905227S4

more lamps and specs on page 731

595

back

PRIVATE RESIDENCE | BUITENHUIS TUINONDERNEMINGEN BELGIUM

TUBE

OUTDOOR
WALL SURFACE








W


A


D


Q


B

2.0 LED

2x LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80|60K 0.88kg

3000K | >90 CRI | 2x629lm

	CODE
	711464W5
	711464D5
	711464A5
	711464B5

2.0 PAR16

2x PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP65 0.67kg

	CODE
	711220W0
	711220D0
	711220A0
	711220Q0
	711220B0

OPTIONAL

PAR16 4.3W | GU10

	CODE
2700K | 350lm	905227S2
3000K | 350lm	905227S4

more lamps and specs on page 731


595



back



PRIVATE RESIDENCE BELGIUM

TAIO

OUTDOOR
WALL SURFACE





1.0

1.0

2.0



W



Q



A



B





1.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal glass convex lens
protector glass

IP65 105° SDCM2 L80|50K 0.48kg

	CODE
	180584W_
	180584A_
	180584Q_
	180584B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	410	>90	3
3000K	440	>90	5

2.0

2x LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal glass convex lens
protector glass

IP65 105° SDCM2 L80|50K 0.81kg

	CODE
	180684W_
	180684A_
	180684Q_
	180684B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x410	>90	3
3000K	2x440	>90	5

213
311
587
597
back







RAY

OUTDOOR
WALL SURFACE









1.0

LED LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.47kg

	CODE
	749168W_
	749168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	440	>90	5

2.0

LED 2x LED PCB 3W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.47kg

	CODE
	749148W_
	749148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x200	>90	3
3000K	2x220	>90	5

3.0

LED LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.53kg

	CODE
	749268W_
	749268B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	440	>90	5

4.0

LED 2x LED PCB 3W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.53kg

	CODE
	749248W_
	749248B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x200	>90	3
3000K	2x220	>90	5

231
377 | 389
411
503
599

back



TRAIN

OUTDOOR
WALL SURFACE











1.0 NARROW

LED LED PCB 6W
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
narrow up or narrow down lens

IP65 46°x5° SDCM3 L70|60K 0.24kg

3000K | >80 CRI | 120lm

	CODE
	718143D4
	718143B4

2.0 NARROW

LED 2x LED PCB 3W
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
narrow up | narrow down lens

IP65 46°x5° SDCM3 L70|60K 0.35kg

3000K | >80 CRI | 2x75lm

	CODE
	718243D4
	718243B4

1.0

LED LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 38° SDCM3 L70|50K 0.24kg

3000K | >90 CRI | 420lm

	CODE
	718868W5
	718868D5
	718868B5

2.0

LED 2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 38° SDCM3 L70|50K 0.35kg

3000K | >90 CRI | 2x255lm

	CODE
	718968W5
	718968D5
	718968B5







back





PRIVATE RESIDENCE CZECH REPUBLIC



PRIVATE RESIDENCE UNITED KINGDOM

CENTRAL

OUTDOOR
WALL SURFACE



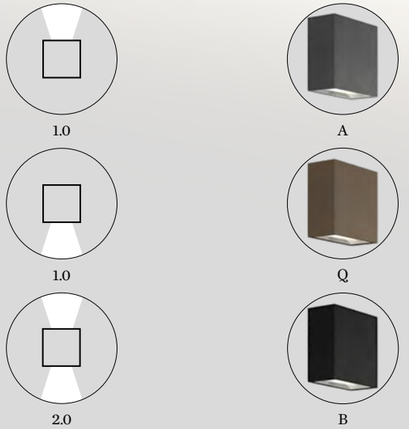





1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 0.58kg

3000K | >90 CRI | 520lm

	CODE
	313774W5
	313774A5
	313774Q5
	313774B5

2.0

2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 0.52kg

3000K | >90 CRI | 2x290lm

	CODE
	313874W5
	313874A5
	313874Q5
	313874B5

527

back



PRIVATE RESIDENCE | ENTIRUS GROUP BELGIUM

STATION

OUTDOOR
WALL SURFACE











1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 0.54kg

3000K | >90 CRI | 520lm

	CODE
	314774A5
	314774B5

2.0

2x LED COB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 0.52kg

3000K | >90 CRI | 2x290lm

	CODE
	314874A5
	314874B5

back



PRIVATE RESIDENCE | SIGGE ARCHITECTS, ANTTI KORPI I TECLUX OY + SIGGE ARCHITECTS, ANTTI KORPI FINLAND

TUBE CARRÉ

OUTDOOR
WALL SURFACE



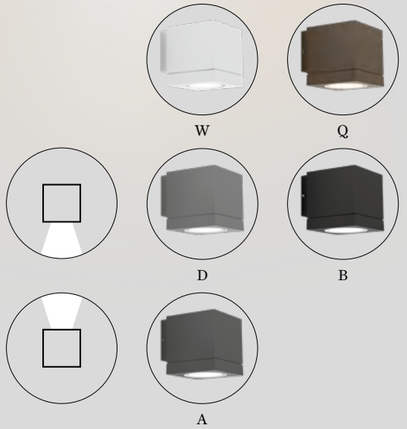





1.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80|60K 0.71kg

3000K | >90 CRI | 629lm

	CODE
	744364W5
	744364D5
	744364A5
	744364B5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP65 0.64kg

	CODE
	744120W0
	744120D0
	744120A0
	744120Q0
	744120B0

OPTIONAL

PAR16 4.3W | GU10

	CODE
2700K | 350lm	905227S2
3000K | 350lm	905227S4

more lamps and specs on page 731





back



PRIVATE RESIDENCE | SPADO ARCHITECTS AUSTRIA

TUBE CARRÉ

OUTDOOR
WALL SURFACE







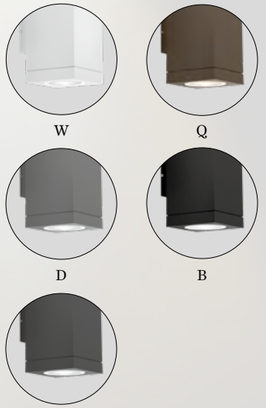

2.0 LED

2x LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 36° SDCM3 L80|60K 1.13kg

3000K | >90 CRI | 2x629lm

	CODE
	744464W5
	744464D5
	744464A5
	744464B5

2.0 PAR16

2x PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium powder coated

IP65 0.94kg

	CODE
	744220W0
	744220D0
	744220A0
	744220Q0
	744220B0

OPTIONAL

PAR16 4.3W | GU10

	CODE
2700K | 350lm	905227S2
3000K | 350lm	905227S4

more lamps and specs on page 731





back


20

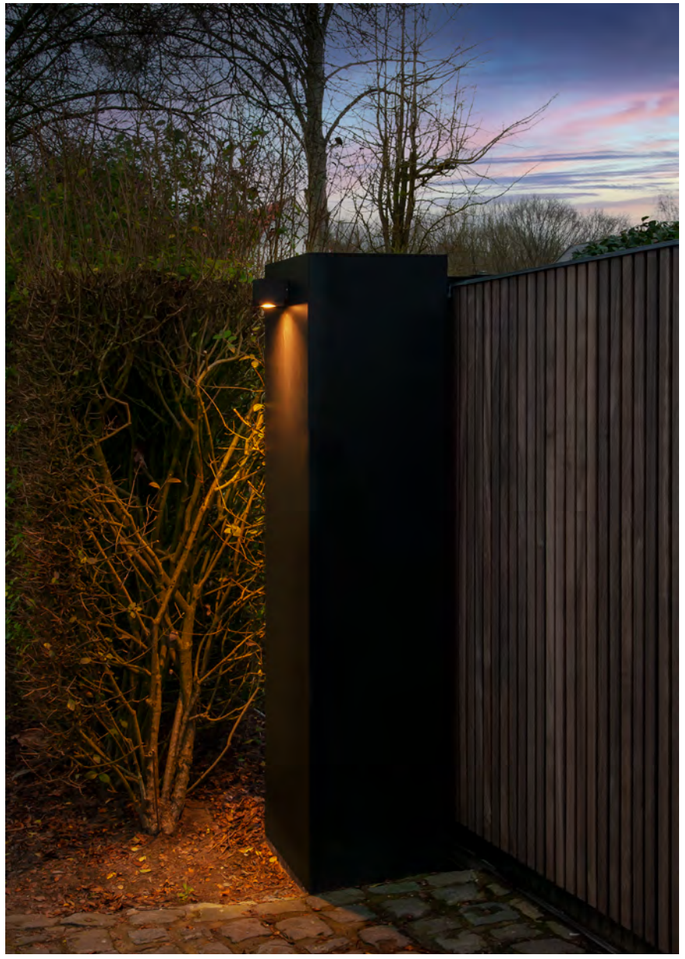



PRIVATE RESIDENCE FRANCE

BOX

OUTDOOR
WALL SURFACE










W


Q


D


B


A

1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.60kg

	CODE
	748168W_
	748168D_
	748168A_
	748168Q_
	748168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	440	>90	5

2.0

2x LED COB 3W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.66kg

	CODE
	748148W_
	748148D_
	748148A_
	748148Q_
	748148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x200	>90	3
3000K	2x220	>90	5

239
413
511
605
back





RENARKER MANCHESTER | UNITED KINGDOM

BOX

OUTDOOR
WALL SURFACE









3.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.67kg

	CODE
	748268W_
	748268D_
	748268Q_
	748268B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	440	>90	5

4.0

2x LED COB 3W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.86kg

	CODE
	748248W_
	748248D_
	748248Q_
	748248B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x200	>90	3
3000K	2x220	>90	5



W



D



Q



B

back

239
413
511
605



PRIVATE RESIDENCE | REFUGE FRANCE

BOXX

OUTDOOR
WALL SURFACE





1.0

LED 2x LED PCB 3W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.93kg



W



B

	CODE
	739174W_
	739174B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x480	>90	3
3000K	2x495	>90	5

back



SHOWROOM | CHILLOUT AREA GRAZ | AUSTRIA

X-BEAM

OUTDOOR
WALL SURFACE

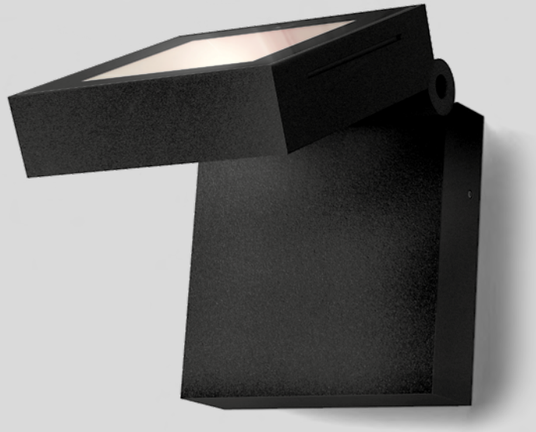





D



A



B



OPTIONAL

snoot

	CODE
	90019023

1.0

LED PCB 25W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 0-110° 120° SDCM2 L80|60K 1.19kg

3000K | >80 CRI | 1600lm

	CODE
	700374D4
	700374A4
	700374B4

back



PRIVATE RESIDENCE BELGIUM

RETO

OUTDOOR
WALL SURFACE

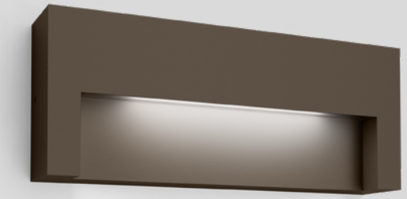



A



Q



B





1.3

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|50K 0.63kg

3000K | >90 CRI | 210lm

	CODE
	745564A5
	745564Q5
	745564B5

2.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|50K 0.65kg

3000K | >90 CRI | 490lm

	CODE
	745664A5
	745664Q5
	745664B5

479

615

back



PRIVATE RESIDENCE | BAUBUREAU OG 27 | LINEAR 54 SWITZERLAND









1.0

2.0

3.0

PALOS

OUTDOOR
WALL SURFACE



1.0

LED LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 0.86kg

	CODE
	4161A4A_
	4161A4Q_
	4161A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>80	2
3000K	520	>80	4



2.0

LED 2x LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 1.10kg

	CODE
	4162A4A_
	4162A4Q_
	4162A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x470	>80	2
3000K	2x505	>80	4



3.0

LED LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 0.98kg

	CODE
	4163A4A_
	4163A4Q_
	4163A4B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	620	>80	2
3000K	670	>80	4

back

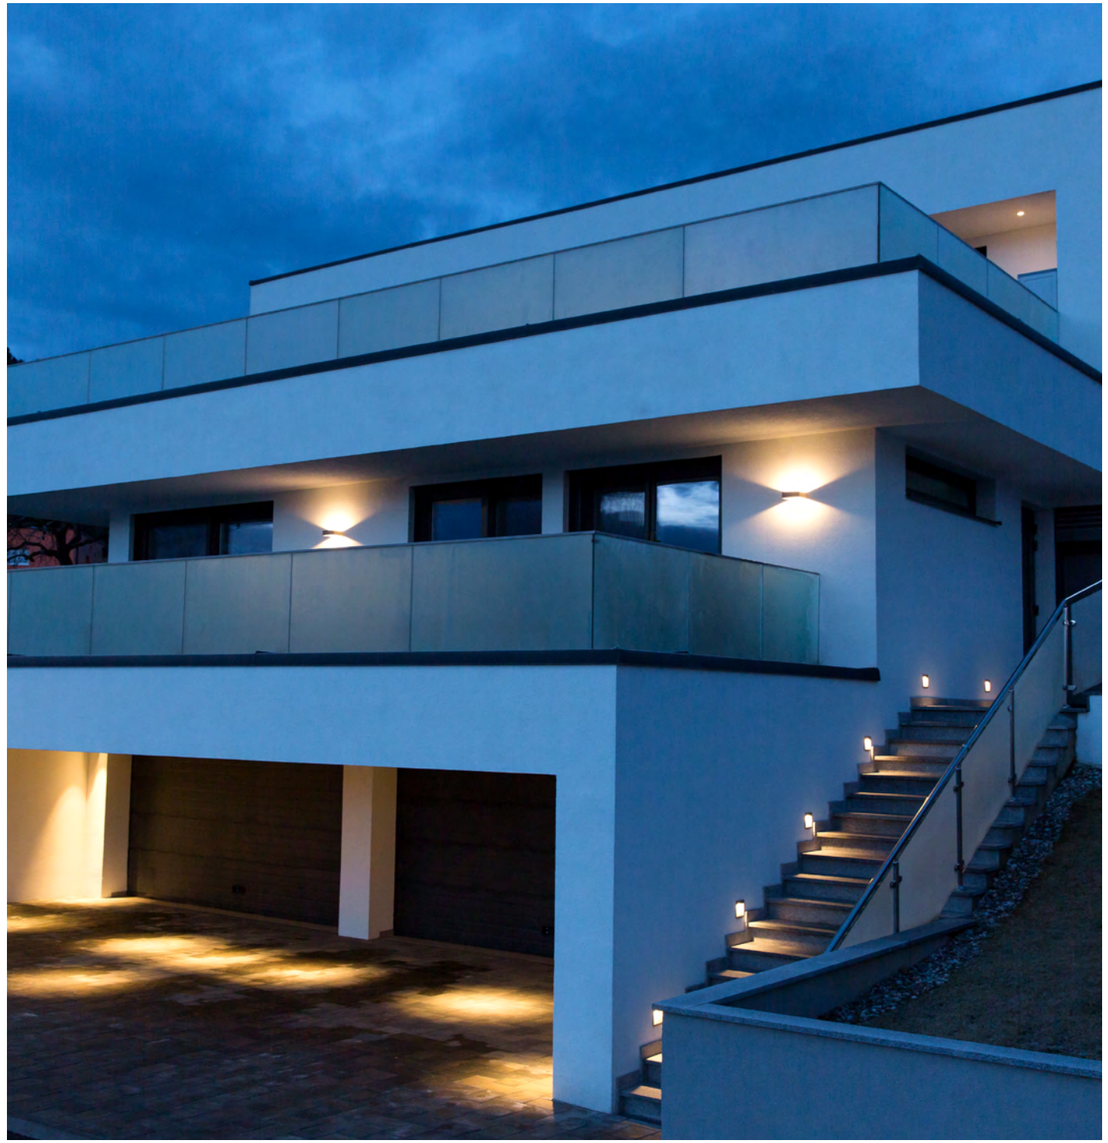

PRIVATE RESIDENCE AUSTRIA

TAPE

OUTDOOR
WALL SURFACE





W



D



A



B

back



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM2 L80|60K 0.73kg

3000K | >90 CRI | 420lm

	CODE
	722174W5
	722174D5
	722174A5
	722174B5



HOTEL BRITANNIA | S-CONSULTANCY KNOKKE-HEIST | BELGIUM

SWAM

OUTDOOR
WALL SURFACE





1.0

2.0



Q



K



B





1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.95kg

2700K | >90 CRI | 210lm

	CODE
	746278Q3
	746278K3
	746278B3

2.0

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.95kg

2700K | >90 CRI | 350lm

	CODE
	746378Q3
	746378K3
	746378B3

back



PRIVATE RESIDENCE AUSTRIA

GETTON

OUTDOOR
WALL SURFACE

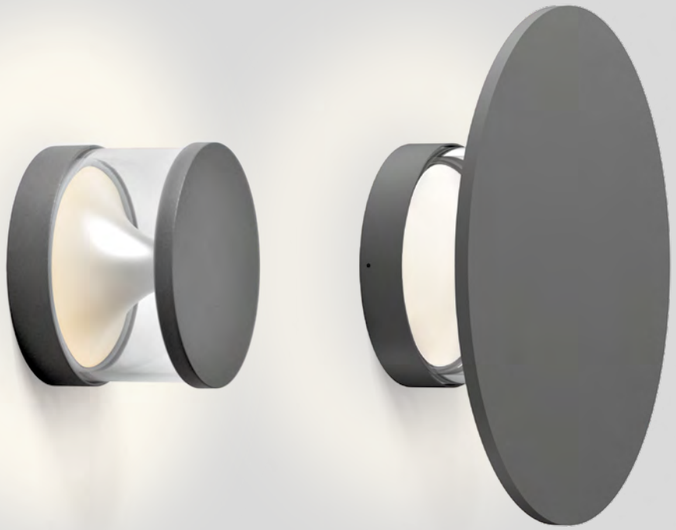





2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
clear glass

IP65 SDCM3 L80|60K 0.83kg

3000K | >80 CRI | 755lm

CODE
717374A4

3.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
clear glass

IP65 SDCM3 L80|60K 1.69kg

3000K | >80 CRI | 755lm

CODE
717774A4

back

FLOOR RECESSED

668 — 681

FLOOR RECESSED



CARD 0.1
671



CARD 0.2
671



MAP
673



MAP ASYM
677



CHART
679



CHART ASYM
681



DIJLEPAD MECHELEN | BELGIUM

CARD

OUTDOOR
FLOOR RECESSED



0.1

LED PCB 1W | 350mA | 3V
excl. driver
aluminium powder coated
stainless steel | glass

IP67 IK07 16° SDCM3 L70|60K 0.05kg

3000K | >80 CRI | 70lm 22-24 60

CODE

750141I4



0.2

LED PCB 1W | 350mA | 3V
excl. driver
aluminium powder coated
stainless steel | glass

IP67 IK07 16° SDCM3 L70|60K 0.06kg

3000K | >80 CRI | 70lm 22-24 60

CODE

750241I4

ALWAYS USE

driver | IP66

CODE

3W | 350mA 90213101

more options and specs on page 724

ALWAYS USE

driver | IP66

CODE

3W | 350mA 90213101

more options and specs on page 724





back



PRIVATE RESIDENCE AUSTRIA

MAP

OUTDOOR
FLOOR RECESSED

















0.6

LED COB 5W
LED 220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 38° SDCM2 L70|50K 0.38kg

38-40 100

3000K | >80 CRI | 275lm

CODE
751168I4

OPTIONAL

recessed ground housing

CODE
90012201

more options and specs on page 737

0.9

LED COB 8W | phase-cut dim
LED 220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08g 38° SDCM2 L70|50K 0.70kg

50-52 135

3000K | >80 CRI | 550lm

CODE
751268I4

OPTIONAL

recessed ground housing

CODE
90012202

more options and specs on page 737

1.2

LED COB 12W | phase-cut dim
LED 220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 38° SDCM2 L70|50K 1.01kg

72-74 120

3000K | >80 CRI | 815lm

CODE
751368I4

OPTIONAL

recessed ground housing

CODE
90012203

more options and specs on page 737

1.6

LED COB 15W | phase-cut dim
LED 220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK09 41° SDCM2 L70|50K 1.01kg

91-93 185

3000K | >80 CRI | 1025lm

CODE
751468I4

OPTIONAL

recessed ground housing

CODE
90012204

more options and specs on page 737

back



TOPSPORTSCHOOL | UAU COLLECTIV HASSELT | BELGIUM

back



PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM

MAP ASYM

OUTDOOR
FLOOR RECESSED





1.2

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass
asymmetric reflector

IP67 IK08 SDCM2 L70|50K 1.06kg

72-74 160

3000K | >80 CRI | 485lm

CODE

751558I4

1.6

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass
asymmetric reflector

IP67 IK09 SDCM2 L70|50K 1.72kg

91-93 185

3000K | >80 CRI | 690lm

CODE

751658I4



OPTIONAL

recessed ground housing

CODE

90012203

more options and specs on page 737

OPTIONAL

recessed ground housing

CODE

90012204

more options and specs on page 737



PRIVATE RESIDENCE FRANCE

CHART

OUTDOOR
FLOOR RECESSED





0.6

LED COB 5W
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 38° SDCM2 L70|50K 0.39kg

38-40 118

3000K | >80 CRI | 275lm

CODE
752168I4

OPTIONAL

recessed ground housing

CODE
90012201

more options and specs on page 737



0.9

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 38° SDCM2 L70|50K 0.70kg

50-52 135

3000K | >80 CRI | 550lm

CODE
752268I4

OPTIONAL

recessed ground housing

CODE
90012202

more options and specs on page 737



1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK08 38° SDCM2 L70|50K 1.05kg

72-74 175

3000K | >80 CRI | 815lm

CODE
752368I4

OPTIONAL

recessed ground housing

CODE
90012203

more options and specs on page 737



1.6

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass

IP67 IK09 41° SDCM2 L70|50K 1.05kg

91-93 185

3000K | >80 CRI | 1025lm

CODE
752468I4

OPTIONAL

recessed ground housing

CODE
90012204

more options and specs on page 737

back

CHART ASYM

OUTDOOR
FLOOR RECESSED



1.2

LED COB 10W | phase-cut dim
LED 220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass
asymmetric reflector

IP67 IK08 SDCM2 L70|50K 1.10kg

72-74 160

3000K | >80 CRI | 485lm

CODE

752558I4

OPTIONAL

recessed ground housing

CODE

90012203

more options and specs on page 737



1.6

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
stainless steel | glass
asymmetric reflector

IP67 IK09 SDCM2 L70|50K 1.83kg

91-93 185

3000K | >80 CRI | 690lm

CODE

752658I4

OPTIONAL

recessed ground housing

CODE

90012204

more options and specs on page 737



back

FLOOR SURFACE

682 — 717

FLOOR SURFACE PROJECTOR



STIPO 1.0
685



STIPO 4.0
685



STAKE
687



STAKE FOLD
687



X-BEAM
689

FLOOR SURFACE BOLLARD



SWAM
691



PACE
695



LINUS
697



PALOS ROUND 1.0
699



PALOS CARRÉ 2.0
701



FIFTY FIFTY
703



SWAY
705



GETTON
707



PALLUZ
709



TAPE
711

FLOOR SURFACE LUMINAIRES



COSTA 1.0
713



COSTA 1.0
713



COSTA 2.0
715



COSTA 2.0
715



SHOWROOM | CHILLOUT AREA GRAZ | AUSTRIA



STIPO

OUTDOOR
FLOOR PROJECTOR









1.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium powder coated

IP65 135° 38° SDCM3 L70|50K 0.59kg

3000K | >90 CRI | 450lm

	CODE
	737168A5
	737168Q5

2.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium powder coated

IP65 135° 38° SDCM3 L70|50K 0.56kg

3000K | >90 CRI | 500lm

	CODE
	737268A5
	737268Q5

3.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium powder coated

IP65 135° 38° SDCM3 L70|50K 0.53kg

3000K | >90 CRI | 450lm

	CODE
	737368A5
	737368Q5

4.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium powder coated

IP65 135° 38° SDCM3 L70|50K 0.52kg

3000K | >90 CRI | 500lm

	CODE
	737468A5
	737468Q5

ALWAYS USE

pole

		CODE
	200	910062A0
	200	910062Q0
	400	910064A0
	400	910064Q0
	600	910066A0
	600	910066Q0

order spike separately

ALWAYS USE

pole

		CODE
	200	910062A0
	200	910062Q0
	400	910064A0
	400	910064Q0
	600	910066A0
	600	910066Q0

order spike separately

OPTIONAL

ground spike

	CODE
	90013106

specs on page 746

OPTIONAL

ground spike

	CODE
	90013106

specs on page 746

OPTIONAL

ground spike

	CODE
	90013106

specs on page 746

OPTIONAL

ground spike

	CODE
	90013106

specs on page 746

back



PRIVATE RESIDENCE BELGIUM

STAKE | STAKE FOLD

OUTDOOR
FLOOR PROJECTOR





snoot



1.0 STAKE

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 0°-90° SDCM3 L80|60K 0.53kg

3000K | >90 CRI | 395lm

	CODE
	727174A5
	727174B5

OPTIONAL

ground spike

	CODE
	90013106

snoot

	CODE
	90019004

specs on page 743



1.0 STAKE FOLD

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 0°-90° SDCM3 L80|60K 0.79kg

3000K | >90 CRI | 395lm

	CODE
	727274A5
	727274B5

OPTIONAL

ground spike

	CODE
	90013107

snoot

	CODE
	90019004

specs on page 743

back



PANORAMA.URBANIZACIÓN PRIVADA MADRID | SPAIN

X-BEAM

OUTDOOR
FLOOR PROJECTOR





snoot

back



1.0

LED COB 25W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 0-110° 120° SDCM2 L80|60K 1.19kg

3000K | >80 CRI | 1600lm

	CODE
	700374D4
	700374A4
	700374B4

OPTIONAL

ground spike

	CODE
	90013115

snoot

	CODE
	90019023

specs on page 743

657



PRIVATE RESIDENCE | IN-LIJN INTERIEUR ARCHITECTUUR BELGIUM



SWAM

OUTDOOR
FLOOR SURFACE



1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.97kg

2700K | >90 CRI | 170lm

	CODE
	746178Q3
	746178K3
	746178B3

ALWAYS USE

straight pole | incl. ground spike

	CODE
400	910090Q0
400	910090B0
600	910091Q0
600	910091B0
800	910092Q0
800	910092B0

OPTIONAL

ground fixation plate

	CODE
	90019019

specs on page 746



1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM3 L70|50K 0.97kg

2700K | >90 CRI | 170lm

	CODE
	746178Q3
	746178K3
	746178B3

ALWAYS USE

curved pole | incl. ground spike

	CODE
400	910093Q0
400	910093B0
600	910094Q0
600	910094B0
800	910095Q0
800	910095B0

OPTIONAL

ground fixation plate

	CODE
	90019019

specs on page 746

665

back





HOTEL BRITANNIA | S-CONSULTANCY KNOKKE-HEIST | BELGIUM



PRIVATE RESIDENCE | SPADO ARCHITECTS AUSTRIA

PACE

OUTDOOR
FLOOR SURFACE





4.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 1.01kg

3000K | >90 CRI | 360lm

	CODE
	723174D5
	723174B5

OPTIONAL

ground spike

	CODE
	90013102

specs on page 746



6.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 1.27kg

3000K | >90 CRI | 360lm

	CODE
	723274D5
	723274B5

OPTIONAL

ground spike

	CODE
	90013102

specs on page 746



8.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L80|60K 1.56kg

3000K | >90 CRI | 360lm

	CODE
	723374D5
	723374B5

OPTIONAL

ground spike

	CODE
	90013102

specs on page 746

back

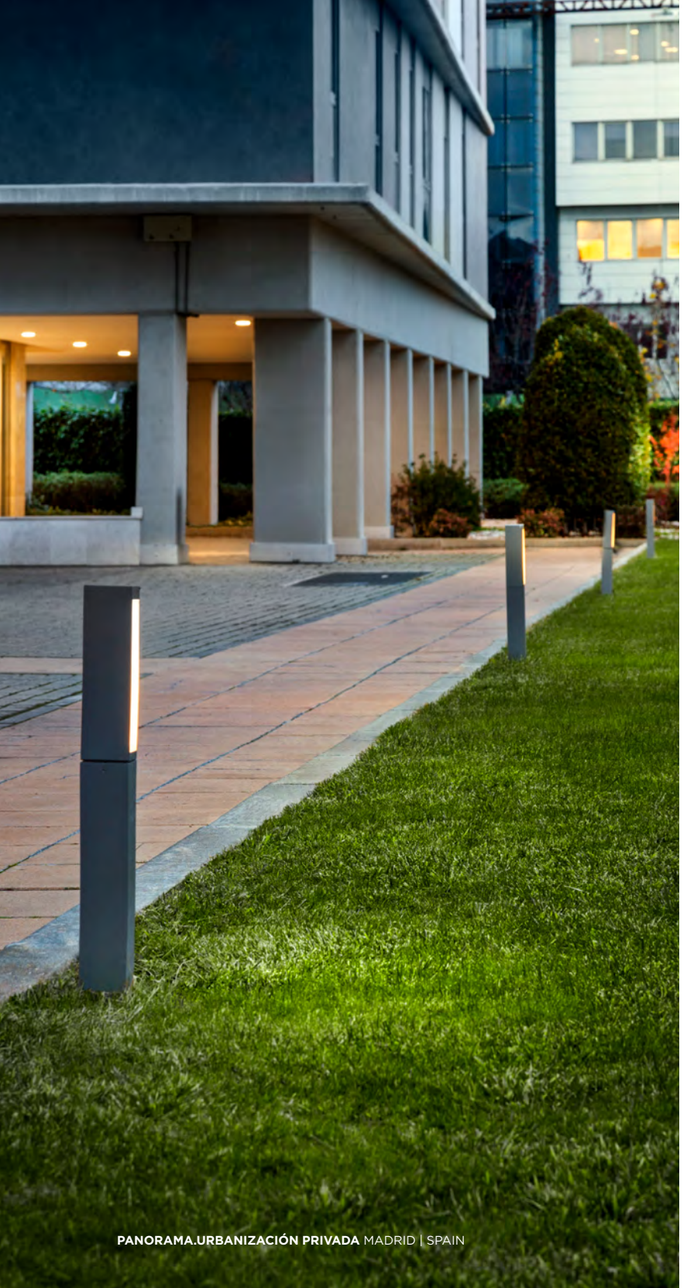

PANORAMA.URBANIZACIÓN PRIVADA MADRID | SPAIN

LINUS

OUTDOOR
FLOOR SURFACE





1.0

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM2 L70|50K 1.12kg

3000K | >80 CRI | 230lm

	CODE
	726178D4
	726178A4
	726178Q4

ALWAYS USE

pole

	CODE
150	910024_0
350	910026_0
550	910028_0

	CODE
	D
	A
	Q

order spike or fixation separately



2.0

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated
PMMA diffuser

IP65 SDCM2 L70|50K 1.10kg

3000K | >80 CRI | 235lm

	CODE
	726288D4
	726288A4
	726288Q4

ALWAYS USE

pole

	CODE
150	910024_0
350	910026_0
550	910028_0

	CODE
	D
	A
	Q

order spike or fixation separately



3.0

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium powder coated

IP65 SDCM2 L70|50K 0.69kg

3000K | >80 CRI | 230lm

	CODE
	726378D4
	726378A4
	726378Q4

ALWAYS USE

pole

	CODE
150	910024_0
350	910026_0
550	910028_0

	CODE
	D
	A
	Q

order spike or fixation separately

OPTIONAL

ground spike

	CODE
	90013103

ground fixation

	CODE
	90013302

specs on page 746

back



VILLA BULFON | X ARCHITEKTEN | MARKUS NIRNBERGER VELDEN AM WÖRTHERSEE | AUSTRIA

PALOS ROUND

OUTDOOR
FLOOR SURFACE

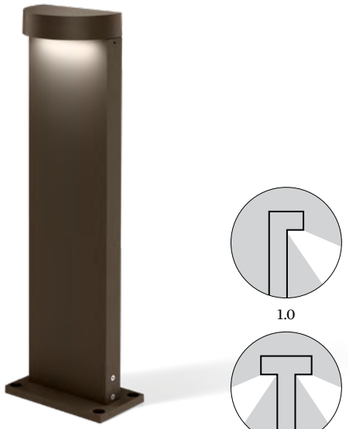



1.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 0.70kg

	CODE
	4166A4A_
	4166A4Q_
	4166A4B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	540 | >80	2
3000K	580 | >80	4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q
	B



1.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 0.70kg

	CODE
	4166A4A_
	4166A4Q_
	4166A4B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	540 | >80	2
3000K	580 | >80	4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q
	B



2.0

LED 2x LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 1.16kg

	CODE
	4167A4A_
	4167A4Q_
	4167A4B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x550 | >80	2
3000K	2x590 | >80	4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q
	B



2.0

LED 2x LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 1.16kg

	CODE
	4167A4A_
	4167A4Q_
	4167A4B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x550 | >80	2
3000K	2x590 | >80	4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q
	B

back



URBANIZACIÓN SANTA ÀGUEDA | ALONSO + SOSA ARCHITECTS | RAFAEL GAVIRA Y EMILIO PELLEJERO
LAS PALMAS | SPAIN

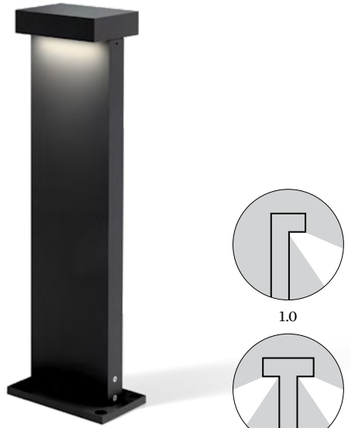

1.0

2.0

PALOS CARRÉ

OUTDOOR
FLOOR SURFACE



1.0

LED LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 0.65kg

	CODE
	4164A4A_
	4164A4Q_
	4164A4B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	540 | >80	2
3000K	580 | >80	4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q
	B



1.0

LED LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 0.65kg

	CODE
	4164A4A_
	4164A4Q_
	4164A4B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	540 | >80	2
3000K	580 | >80	4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q
	B



2.0

LED 2x LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 0.97kg

	CODE
	4165A4A_
	4165A4Q_
	4165A4B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x550 | >80	2
3000K	2x590 | >80	4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q
	B



2.0

LED 2x LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM3 L70|50K 0.97kg

	CODE
	4165A4A_
	4165A4Q_
	4165A4B_

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x550 | >80	2
3000K	2x590 | >80	4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q
	B

661

back



PRIVATE RESIDENCE | KILLIAN GARTNER | ROOMS ATELIER AUSTRIA



FIFTY FIFTY

OUTDOOR
FLOOR SURFACE



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM2 L80|60K 1.23kg

3000K | >80 CRI | 310lm

	CODE
	756174D4
	756174A4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	D
	A



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM2 L80|60K 1.23kg

3000K | >80 CRI | 310lm

	CODE
	756174D4
	756174A4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	D
	A

back



RENAKER MANCHESTER | UNITED KINGDOM

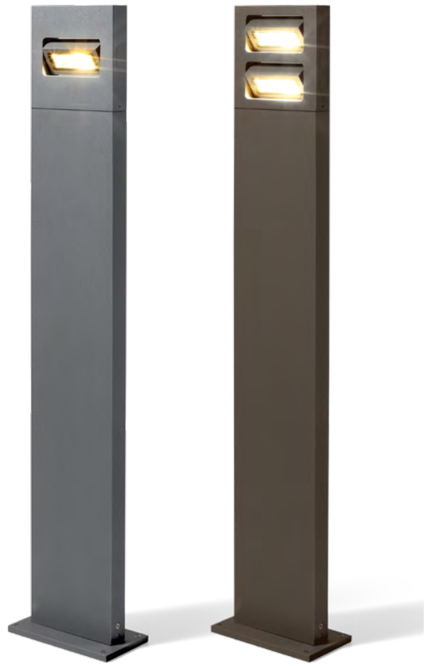

SWAY

OUTDOOR
FLOOR SURFACE



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP54 0°-140° SDCM2 L80|60K 1.36kg

3000K | >80 CRI | 445lm

	CODE
	720374D4
	720374A4
	720374Q4

ALWAYS USE

pole with fixation plate

	CODE
pole 170	910013_0
pole 270	910014_0
pole 470	910016_0
pole 670	910018_0
pole 870	910010_0

	CODE
	D
	A
	Q



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP54 0°-140° SDCM2 L80|60K 1.36kg

3000K | >80 CRI | 445lm

	CODE
	720374D4
	720374A4
	720374Q4

ALWAYS USE

pole with concrete fixation

	CODE
pole 170	910073_0
pole 270	910074_0
pole 470	910076_0
pole 670	910078_0
pole 870	910070_0

	CODE
	D
	A
	Q



2.0

LED 2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP54 0°-140° SDCM2 L80|60K 1.21kg

3000K | >80 CRI | 2x445lm

	CODE
	720474D4
	720474A4
	720474Q4

ALWAYS USE

pole with fixation plate

	CODE
pole 170	910013_0
pole 270	910014_0
pole 470	910016_0
pole 670	910018_0
pole 870	910010_0

	CODE
	D
	A
	Q



2.0

LED 2x LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP54 0°-140° SDCM2 L80|60K 1.21kg

3000K | >80 CRI | 2x445lm

	CODE
	720474D4
	720474A4
	720474Q4

ALWAYS USE

pole with concrete fixation

	CODE
pole 170	910073_0
pole 270	910074_0
pole 470	910076_0
pole 670	910078_0
pole 870	910070_0

	CODE
	D
	A
	Q

back



RETIREMENT HOME SUNNEMATTE | ARCHITECT SCHÖPFER + WIDMER BAUPLANUNG | T&P TROXLER&PARTNER AG
ESCHOLZMATT | SWITZERLAND



back

GETTON

OUTDOOR
FLOOR SURFACE



2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
aluminium reflector | clear glass

IP65 SDCM3 L80|60K 1.21kg

3000K | >80 CRI | 755lm

	CODE
	717674A4

ALWAYS USE

pole

	CODE
275	910052A0
475	910054A0
675	910058A0

order spike separately

OPTIONAL

ground spike

	CODE
	90013101

specs on page 746

667



PRIVATE RESIDENCE SWEDEN

PALLUZ

OUTDOOR
FLOOR SURFACE





1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
opal glass

IP65 SDCM3 L80|60K 2.13kg

3000K | >80 CRI | 510lm

	CODE
	724384D4

ALWAYS USE

pole

	CODE
100	910033D0
470	910036D0
670	910038D0

OPTIONAL

ground fixation | pole 100 | 470 | 670

	CODE
	90013303

specs on page 746



2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated
clear glass

IP65 SDCM3 L80|60K 2.14kg

3000K | >80 CRI | 560lm

	CODE
	724474D4

ALWAYS USE

pole

	CODE
100	910033D0
470	910036D0
670	910038D0

OPTIONAL

ground fixation | pole 100 | 470 | 670

	CODE
	90013303

specs on page 746

back



STYRIA MEDIA CENTER | ARCHITEKTUR CONSULT ZT | LICHTPLANER VEDDER GRAZ | AUSTRIA

TAPE

OUTDOOR
FLOOR SURFACE

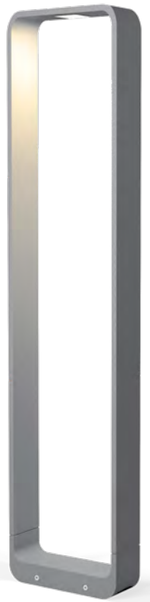



4.0

LED LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM2 L80|60K 1.82kg

3000K | >90 CRI | 420lm

CODE
722274D5

OPTIONAL

ground spike

CODE
90013102

specs on page 746



6.0

LED LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM2 L80|60K 2.42kg

3000K | >90 CRI | 420lm

CODE
722374D5

OPTIONAL

ground spike

CODE
90013102

specs on page 746



8.0

LED LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium powder coated

IP65 SDCM2 L80|60K 3.12kg

3000K | >90 CRI | 420lm

CODE
722474D5

OPTIONAL

ground spike

CODE
90013102

specs on page 746

back

COSTA

OUTDOOR
FLOOR SURFACE

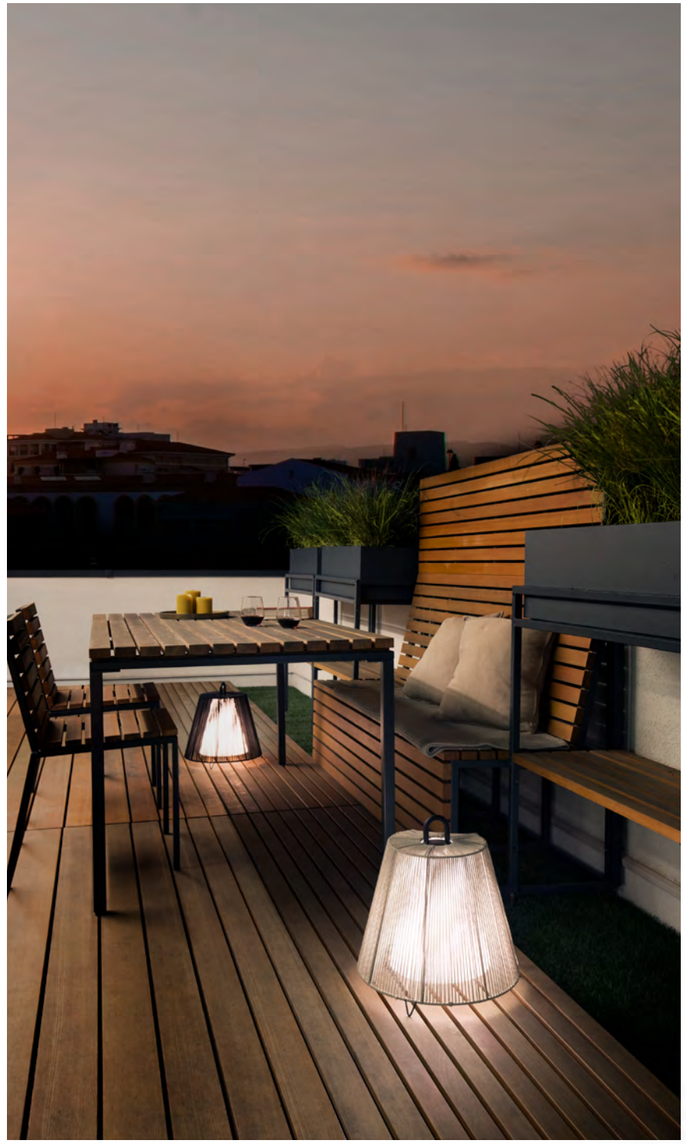

PRIVATE RESIDENCE | FIPE ARCHITECTS AUSTRIA

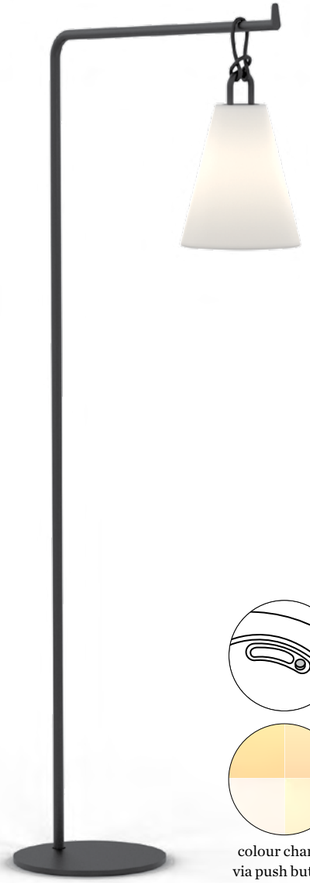

colour change
via push button



1.0 yellow



1.0 orange



1.0 light blue



1.0 black



1.0 LED

2x LED channels 1.5W | 130lm
220-240VAC | 2200-4000K
rechargeable li-ion battery
incl. charger | light for 8 hours
recharging time 5 hours
polyethylene | polypropylene

IP65 SDCM3 L80|60K 1.00kg

handle colour

	CODE
	865186YE9
	865186OR9
	865186SB9
	8651860B9



OPTIONAL

1.0 rope

	CODE
	90057171
	90057170

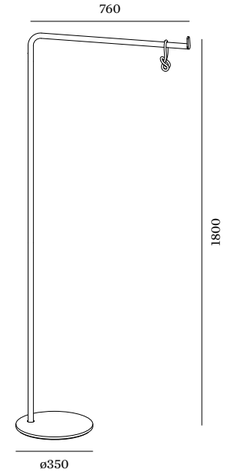

OPTIONAL

inox pole powder coated

	CODE
	90056001

back

COSTA

OUTDOOR
FLOOR SURFACE

DESIGN AWARD 2019

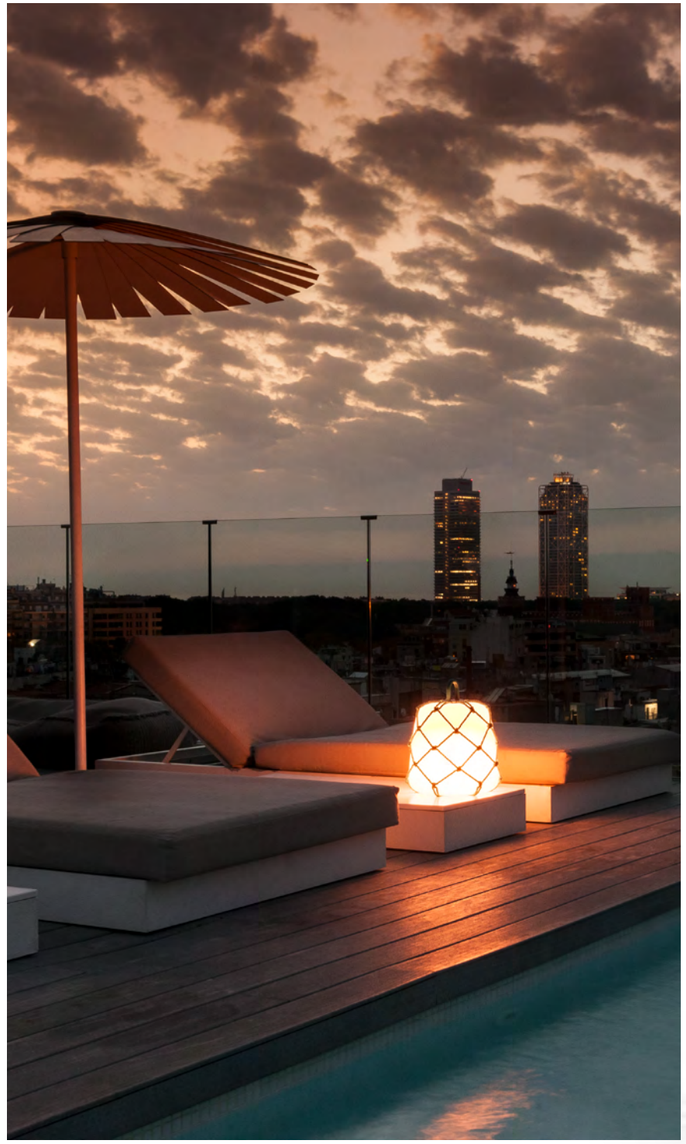



colour change
via push button



2.0 LED

2x LED channels 1.5W | 130lm
220-240VAC | 2200-4000K
rechargeable li-ion battery
incl. charger | light for 8 hours
recharging time 5 hours
polyethylene | polypropylene

IP65 SDCM3 L80|60K 1.10kg

handle colour

	CODE
	865286YE9
	865286OR9
	865286SB9
	8652860B9



OPTIONAL

2.0 rope

	CODE
	90057192
	90057191
	90057193
	90057190



OPTIONAL

2.1 cage

	CODE
	90057182
	90057181
	90057183
	90057180

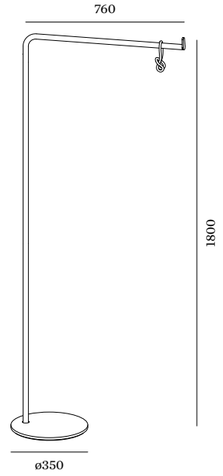

OPTIONAL

inox pole powder coated

	CODE
	90056001

HOTEL YURBBAN BARCELONA | SPAIN

back



PRIVATE RESIDENCE AUSTRIA

back

TECHNICAL

IF YOU ARE WEARING RED, SHAKE YOUR HEAD



CRI 80+

AREA OF APPLICATION
Offices and restaurants
for average use

ANWENDUNGSBEREICH
Büro und Restaurants mit durchschnittlichen Anwendungen

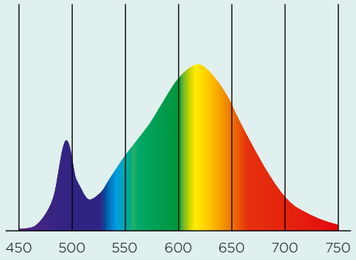

Wavelength (nm) / *Wellenlänge (nm)*



CRI 90+

AREA OF APPLICATION
Private homes, offices,
and sales areas

ANWENDUNGSBEREICH
Privaträume, Büros und Verkaufsbereiche

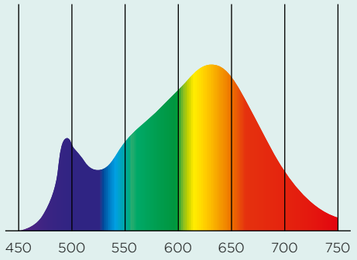

Wavelength (nm) / *Wellenlänge (nm)*



CRI 95+

AREA OF APPLICATION
Museums, galleries, fine dining,
and exclusive products in stores

ANWENDUNGSBEREICH
Museen, Gallerien, exquisites Essen und Qualitätsprodukte in Shops

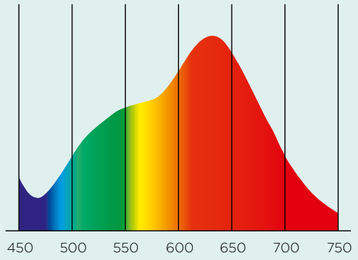

Wavelength (nm) / *Wellenlänge (nm)*

Why do our LEDs put things in the best light? Because they have a colour rendering index above 80. You're probably thinking "Okay...". But what exactly does that mean? The colour rendering index, the CRI, measures the ability of an artificial light to accurately reproduce colours. The higher this value – and 100 CRI would be possible in theory – the more natural and appealing objects look in your home. So your bright red sofa will finally get the attention it deserves!

Warum unsere LEDs die Dinge ins rechte Licht rücken? Weil sie einen Farbwiedergabewert von mindestens >80 haben. Aha, werden Sie sich jetzt denken. Aber was genau bedeutet das? Nun, der Farbwiedergabewert – oder CRI Index – zeigt an, in welcher Qualität Farben von einer künstlichen Lichtquelle wiedergegeben werden. Je höher also dieser Wert ist – theoretisch wären 100 CRI möglich - desto natürlicher und schöner sehen die Objekte in Ihrem Zuhause aus. So bekommt Ihr knallrotes Sofa endlich die Aufmerksamkeit, die es verdient!

TURN THE LIGHTS DOWN LOW

DIMMING

OH, HOW ROMANTIC

What sets a romantic mood faster than tea lights? That's right – our selection of dimming variants that easily control the light intensity. Not just with analogue dimming, but also digitally or via local building automation. DALI lets you group different luminaires together. You can dim them separately and even set lighting moods in advance. You're renovating and don't want to change the wiring? Then adjusting the light level via phase-cut dim is the perfect solution for you. All you need is standard wiring with a three-pin cable. Want an even more precise result? Connect a converter between 1-10 volts to adjust the current. Don't forget to get two more cables and keep an eye on the correct polarity. Or keep things completely care-free and cable-free via Bluetooth. Simply install the Bluetooth dimmer, download the app and off you go.

OH, WIE ROMANTISCH

Was sorgt schneller für romantische Stimmung als eine Packung Teelichter? Richtig. Unsere verschiedenen Dimming-Varianten, mit denen sich die Lichtintensität ganz einfach steuern lässt. Und das nicht nur analog, sondern auch digital oder über die lokale Gebäudeautomatisierung. So kann man mit DALI verschiedene Leuchten gruppieren, separat dimmen und sogar Lichtstimmungen vorab einstellen. Ganz easy vom iPad oder iPhone aus. Sie sind gerade in der Renovierungsphase und möchten die Verkabelung nicht ändern? Dann ist der analoge Phasenabschnittsdimmer phase-cut dim die perfekte Lösung für Sie. Alles, was Sie dafür brachen ist eine normale Verkabelung mit einem 3-poligen Kabel. Sie möchten ein noch präziseres Ergebnis? Dann können Sie bei 1-10 Volt einen Konverter dazwischenschalten, mit dem die Stromstärke angepasst wird. Wichtig dabei: Zwei weitere Kabel besorgen und die richtige Polarität im Auge behalten. Oder komplett sorgen- und kabelfrei via Bluetooth. Hier einfach den Bluetooth Dimmer einbauen, die App downloaden und schon geht's los.

PHASE-CUT DIM
Triac (Analogue)



1-10V DIM
Analogue



DALI DIM
Digital



BLUETOOTH
Digital



more specs on page 729

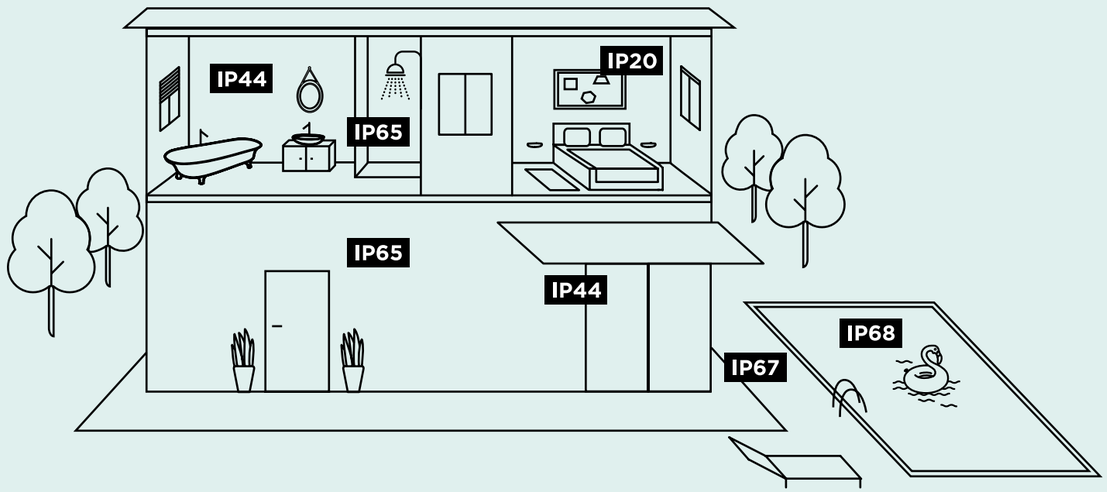

GENERAL INFORMATION

We advise having the lighting devices installed by a qualified electrician only. If the area is cleaned with water jets, then a minimum of IP65 is required.

ALLGEMEINER HINWEIS

Wir empfehlen, die Leuchtkörper nur von einem Elektrofachmann installieren zu lassen. Bei Wasserstrahlreinigung der Umgebung mindestens Wasserschutzklasse IP65 wählen.

SAFETY FIRST

IP RATING

FIRST DIGIT

Protection against solids

Schutz gegen Festkörper

0 No protection
Kein Schutz

1 Protected against solid objects over 50 mm Ø
Geschützt vor festen Gegenständen über 50 mm Ø

2 Protected against solid objects over 12 mm Ø
Geschützt vor festen Gegenständen über 12 mm Ø

3 Protected against solid objects over 2.5mm Ø
Geschützt vor festen Gegenständen über 2,5mm Ø

4 Protected against solid objects over 1.0 mm Ø
Geschützt vor festen Gegenständen über 1,0 mm Ø

5 Dust-proof
Staubgeschützt

6 Dust-tight
Staubdicht

SECOND DIGIT

Protection against liquids

Schutz gegen Flüssigkeiten

0 No protection
Kein Wasserschutz

1 Protected against vertically dripping water
Geschützt vor senkrecht fallendem Tropfwasser

2 Protected against water dripping at an angle (up to 15°)
Geschützt vor schräg fallendem Tropfwasser (bis 15°)

3 Protected against spraying water
Geschützt vor Sprühwasser

4 Protected against water splashing from all directions
Geschützt vor Spritzwasser aus allen Richtungen

5 Protected against water jets
Geschützt vor Strahlwasser

6 Protected against strong water jets
Geschützt vor starkem Strahlwasser

7 Protected against penetrating water when temporarily immersed
Geschützt vor eindringendem Wasser beim kurzzeitigen Eintauchen

8 Protected against penetrating water when submerged
Geschützt vor eindringendem Wasser beim Untertauchen

DRIVER 250mA 10W DIM
10W | preset at 250mA | 16-29V
phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 125x41x23
IP20 0.094kg

DEEP BIJOU 1.0

CODE
90226401

DRIVER 250mA 10W DALI
10W | 250mA | 6-40V | DALI
220-240VAC | 50-60Hz | 5-100%
L/W/H 124x31x21
IP20 0.08kg

DEEP BIJOU 1.0, 2.0

CODE
90249402

DRIVER 250mA 15W DIM
15W | preset at 250mA | 26-42V |
phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
IP20 0.096kg

DEEP BIJOU 2.0

CODE
90226501

DRIVER 350mA 3W IP66
3W | 350mA | 3-15V
Driver 90-264VAC | 50-60Hz
L/W/H 52x30x23
IP66 0.05kg

ORIS 0.7, 0.8, 1.3, 2.0 | **CARD**

CODE
90213101

DRIVER 350mA 4W
4W | 350mA | 4-12V
100-240VAC | 50-60Hz
L/W/H 53x27x22
IP20 0.05kg

CODE
90213201

DRIVER 350mA 6W
6W | 350mA | 3-22V
90-264VAC | 50-60Hz
L/W/H 68x35x21
IP20 0.04kg

LITO | **ORIS** 0.7, 0.8, 1.3 | **STRIPE**
RETO indoor

CODE
90213202

DRIVER 350mA 7W IP67
7W | 350mA | 10-20V
90-295VAC | 47-63Hz
L/W/H 57x41x24
IP67 0.05kg

CODE
90213301

DRIVER 350mA 10W 1-10V DIM
10W | 350mA | 14-28V | 1-10V dim
220-240VAC | 50-60Hz
L/W/H 101.5x51x29.5
IP20 0.09kg

DEEP PETIT | **DEEP ADJUST PETIT** | **PLANO PETIT** 1.0, 3.0
STRANGE PETIT 1.0, 3.0

CODE
90223401

DRIVER 350mA 10W DALI
10W | 350mA | 2.5-26V | DALI
220-240VAC | 50-60Hz | 5-100%
L/W/H 124x31x21
IP20 0.08kg

CENO 1.0 semi-recessed, 1.0, 1.1
MATCH 1.0 trimless, 1.0

CODE
90243401

DRIVER 350mA 10W DIM
10W | 350mA | 12-28V | phase-cut dim
220-240VAC | 50-60Hz
L/W/H 102x38x21
IP20 0.09kg

DEEP PETIT | **DEEP ADJUST PETIT** | **PLANO PETIT** 1.0, 3.0
STRANGE PETIT 1.0, 3.0 | **MATCH** 1.0 trimless, 1.0 | **CENO** 1.0 semi-recessed, 1.0, 1.1

CODE
90223402

DRIVER 350mA 15W DIM
15W | 350mA | 27-42V | phase-cut dim
220-240VAC | 50-60Hz
L/W/H 102x49x29
IP20 0.09kg

LED MODULES HO 73240577 | 73240682 | 73240542 | 73240681 | 73241320 | 73241321
PLANO PETIT 2.0

CODE
90223403

DRIVER 350mA 17W DALI
17W | 350mA | 10-49V | DALI
220-240VAC | 50-60Hz | 1-100%
L/W/H 108x52x22
IP20 0.106kg

DEEP PETIT | **DEEP** | **DEEP IP44**
DEEPER | **DEEPER IP44** | **DEEP ADJUST PETIT** | **DEEP ADJUST** 1.0 | **DEEP ADJUST TRIMLESS**
DEEP ASYM ADJUST | **TAIO IP65**
RONY | **RON** | **PLANO PETIT** 1.0, 3.0
PLANO | **PLANO IP44** | **STRANGE PETIT** 1.0, 3.0 | **STRANGE** | **SNEAK TRIM** | **SNEAK TRIMLESS** | **BLIEK**
RINI SNEAK IP44 | **PLANO IP44**

CODE
90243601

DRIVER 350mA 17W IP68
17W | 350mA | 5-49V
220-240VAC | 50-60Hz
L/W/H 122x54x26
IP68 0.25kg

DEEP IP65 | **TAIO**

CODE
90213602

DRIVER 350mA 20W DALI
20W | 350mA | 3-45V | DALI DT6 – push dim with memory function
220-240VAC | 50-60Hz
L/W/H 116x40.5x22
IP20 0.16kg

PLANO PETIT 2.0

CODE
90243602

DRIVER 350mA 30W
30W | 350mA | 43-86V
220-240VAC | 50-60Hz
L/W/H 127x43x30
IP20 0.15kg

CODE
90213701

DRIVER 350/500/700mA 17-32W DIM
350/500/700mA | dipswitch selection
17W | 350mA | 2-47V
24W | 500mA | 2-47V
32W | 700mA | 2-46V
phase-cut dim | not for ambient dim
220-240VAC | 50-60Hz
L/W/H 166x46x34
IP20 0.19kg

CODE
90228801

DRIVER 350/500/700mA 17.5-20W
350/500/700mA output selection
17.5W | 350mA | 25-50V
20W | 500mA | 20-40V
20W | 700mA | 14-28.5V
220-240VAC | 50-60Hz
L/W/H 101.5x51x29.5
IP20 0.09kg

DEEP ADJUST 2.0 | **PLANO PETIT** 2.0 | **RON** 2.0 | **STRANGE PETIT** 2.0 | **STRANGE** 2.0 | **SNEAK TRIM** 2.0 | **SNEAK TRIMLESS** 2.0

CODE
90218601

DRIVER 500mA 6W
6W | 500mA | 3-12V
90-264VAC | 50-60Hz
L/W/H 68x35x21
IP20 0.04kg

THEMIS | **STRANGE** wall
LITO

CODE
90214201

DRIVER 500mA 6.5W DIM
6.5W | preset at 500mA
7-13V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
IP20 0.07kg

DEEP BIJOU IP65 | **PIRRO** 1.0

CODE
90224301

DRIVER 500mA 7W IP67
7W | 500mA | 5-14.5V
90-295VAC | 47-63Hz
L/W/H 57x41x24
IP67 0.15kg

DEEP BIJOU IP65 | **ORIS** 0.7, 0.8, 1.3, 2.0

CODE
90214301

DRIVER 500mA 10W
10W | 500mA | 11-20V
220-240VAC | 50Hz
L/W/H 100x43x23
IP20 0.116kg

DEEP ADJUST 1.0 | **DEEP ADJUST TRIMLESS** | **DEEP ASYM ADJUST**
DEEP | **DEEPER** | **DEEP IP65**
DEEPER IP44 | **BLIEK** | **RINI**
SNEAK IP44 | **RON** 1.0 | **RONY**
STRANGE 1.0 | **PLANO** 1.0 | **PLANO IP44** | **TAIO IP65** | **SNEAK TRIM** 1.0 | **SNEAK TRIMLESS** 1.0

CODE
90214405

DRIVER 500mA 10W DIM
10W | 500mA | 3-20V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%
L/W/H 102x49x29
0.08kg IP20

DEEP ADJUST 1.0 | **DEEP ADJUST TRIMLESS** | **DEEP ASYM ADJUST**
DEEP | **DEEPER** | **DEEP IP65**
DEEPER IP44 | **BLIEK** | **PLANO** 1.0
PLANO IP44 | **RON** 1.0 | **RINI**
SNEAK IP44 | **RONY** | **SNEAK TRIM** 1.0 **SNEAK TRIMLESS** 1.0 | **STRANGE** 1.0 | **TAIO IP65**

CODE
90224402

DRIVER 500mA 10W 1-10V DIM
10W | 500mA | 10-20V | 1-10V dim
220-240VAC | 50-60Hz
L/W/H 102x51x30
IP20 0.06kg

CODE
90234401

DRIVER 500mA 10W DALI
10W | 500mA | 2.5-20V
220-240VAC | 50-60Hz
L/W/H 124x31x21
IP20 0.058kg

CODE
90244401

DRIVER 500mA 10W DIM
10W | preset at 500mA
12-20V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
IP20 0.08kg

PIRRO 2.0

CODE
90224503

DRIVER 500mA 20W DALI
20W | 500mA | 5-40V | DALI
220-240VAC | 50-60Hz | 0-100%
L/W/H 108x52x22
IP20 0.106kg

CODE
90244602

DRIVER 500mA 20W DIM
20W | preset at 500mA
26-38V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 138x44x30
IP20 0.0125kg

DEEP ADJUST 2.0 | **PIRRO** 4.0, 6.0
PLANO 2.0 | **RON** 2.0 | **STRANGE** 2.0 | **SNEAK TRIM** 2.0 | **SNEAK TRIMLESS** 2.0

CODE
90224602

DRIVER 500mA 20W DALI
20W | 500mA | 3-40V | DALI DT6 – push dim with memory function
220-240VAC | 50-60Hz
L/W/H 116x40.5x22
IP20 0.16kg

DEEP | **DEEPER** | **DEEP ADJUST** **DEEP ADJUST TRIMLESS** | **DEEP ASYM ADJUST** | **RONY** | **PIRRO** **RON** | **PLANO** | **STRANGE** | **SNEAK TRIM** | **SNEAK TRIMLESS** | **BLIEK** **RINI SNEAK IP44** | **PLANO IP44**

CODE
90244604

DRIVER 500mA 21W DIM
21W | 500mA | 16-42V | phase-cut dim
220-240VAC | 50-60Hz
L/W/H 110x52x22
IP20 0.11kg

CODE
90224702

DRIVER 500mA 21W DIM
21W | 500mA | 28-42V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%
L/W/H 101.5x51x29.5
IP20 0.09kg

CODE
90224701

DRIVER 500mA 24W IP68
24W | 500mA | 5-48V
220-240VAC | 50-60Hz
L/W/H 122x54x26
IP68 0.25kg

DEEP IP65 | **DEEPER IP44** **TAIO IP65**

CODE
90214702

DRIVER 500mA 25W DALI
25W | 350-1050mA | preset at 500mA
20-50V | DSI | push dim | DALI
220-240VAC | 50-60Hz | 1-100%
L/W/H 130x43x30
IP20 0.17kg

CODE
90254603

DRIVER 700mA 3W IP66
3W | 700mA | 3-6V
90-264VAC | 50-60Hz
L/W/H 52x30x23
IP66 0.09kg

CODE
90215101

DRIVER 700mA 6W
6W | 700mA | 3-8.4V
90-264VAC | 50-60Hz
L/W/H 68x35x21
IP20 0.04kg

STRIPE | **THEMIS** | **STRANGE** wall
ORIS 0.7, 0.8, 1.3

CODE
90215203

DRIVER 700mA 7W IP67
7W | 700mA | 3-10.5V
90-295VAC | 47-63Hz
L/W/H 57x41x24
IP67 0.07kg

ORIS 0.7, 0.8, 1.3, 2.0

CODE
90215301

DRIVER 700mA 10W DIM
10W | preset at 700mA
8-14V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
IP20 0.08kg

BLIEK ROUND PETIT 1.0

CODE
90225402

DRIVER 700mA 10W DALI
10W | 700mA | 2.5-14V | DALI
220-240VAC | 50-60Hz | 1-100%
L/W/H 124x31x21
IP20 0.08kg

BLIEK ROUND PETIT 1.0

CODE
90245401

DRIVER 700mA 15W DIM
15W | preset at 700mA
12-20V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x44x23
IP20 0.08kg

PLANO PETIT 2.0 | **STRANGE PETIT** 2.0 | **MATCH** 2.0 | **CENO** 2.0
BLIEK ROUND PETIT 2.0

CODE
90225502

DRIVER 700mA 20W DIM
20W | preset at 700mA
15-28V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 137.6x44x30
IP20 0.105kg

CENO 3.0

CODE
90225604

DRIVER 700mA 20W DIM
20W | 700mA | 16-28V
phase-cut dim
220-240VAC | 50-60Hz
L/W/H 110x52x22
IP20 0.11kg

CODE
90225603

DRIVER 700mA 20W DALI
20W | 700mA | 3-28V | DALI
220-240VAC | 50-60Hz | 0-100%
L/W/H 108x52x22
IP20 0.106kg

PLANO PETIT 2.0 | **STRANGE PETIT** 2.0

CODE
90245602

DRIVER 700mA 25W DIM
25W | 700mA | 17-35V | phase-cut dim
220-240VAC | 50-60Hz
L/W/H 145x51x30
IP20 0.12kg

CODE
90225701

DRIVER 700mA 30W DIM
30W | preset at 700mA
26-42V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 137.6x44x30
IP20 0.14kg

DEEP ADJUST FORT
PLANO FORT

CODE
90225702

DRIVER 700mA 30W DALI 1-10V DIM
30W | preset at 700mA | 9-42V
push dim | DALI | 1-10V dim
220-240VAC | 50-60Hz
L/W/H 103x67x22
IP20 0.142kg

CODE
90245703

DRIVER 700mA 35W DALI
35W preset at 700mA | 9-40V
DALI DT6 – push dim with memory function | 220-240VAC | 50-60Hz
L/W/H 136x42.5x24
IP20 0.21kg

DEEP ADJUST FORT | **CENO** 2.0, 3.0 | **PLANO FORT** | **BLIEK ROUND PETIT** 2.0 | **MATCH** 2.0

CODE
90245801

DRIVER 12V/10W
10W | 12V| leading + trailing edge
220-240VAC | 50-60Hz | 3-10VA
L/W/H 102x51x30
IP20 0.1kg

CODE
90221401

DRIVER 12V/25W
25W | 12V | leading + trailing edge
220-240VAC | 50-60Hz | 8-25VA
L/W/H 145x51x29.5
IP20 0.1kg

CODE
90221701

DRIVER 12V/70W
70W | 12V | leading + trailing edge
230-240VAC | 50-60Hz | 20-70VA
L/W/H 108x52x33
IP20 0.12kg

CODE
90221904

DRIVER 12V/105W
105W | 12V | leading + trailing edge
230-240VAC | 50-60Hz | 35-105VA
L/W/H 108x52x33
IP20 0.12kg

CODE
90221905

DRIVER 24V/25W
0-24W | 24V | phase-cut dim
220-240VAC | 50-60Hz
L/W/H 137x50x15,5
IP20 0.90 kg

ILANE

CODE
90222701

DRIVER 24V/35W
35W | 24V | PWM dim
220-240VAC | 50-60Hz
L/W/H 142x43x30
IP20 0.14 kg

ILANE

CODE
90212801

DRIVER 24V/35W IP67
35W | 24V
100-277VAC | 50-60Hz
L/W/H 175x31x42.5
IP67 0.56 kg

RETO outdoor

CODE
90212802

DRIVER 24V/50W
12-50W | 24V | phase-cut dim
220-240VAC | 50-60Hz
L/W/H 166x52x24
IP20 0.95 kg

ILANE

CODE
90222901

DRIVER 24V/100W
100W | 24V | PWM dim
220-240VAC | 50-60Hz
L/W/H 295x43x30
IP20 0.23 kg

ILANE

CODE
90212902

DRIVER 24V/100W DALI
100W | 24V | DALI
220-240VAC | 50-60Hz
L/W/H 295x43x30
IP20 0.25 kg

ILANE

CODE
90242901

DRIVER 24V/100W IP67
100W | 24V
100-277VAC | 50-60Hz
L/W/H 178x68x39
IP67 0.83 kg

RETO outdoor

CODE
90212903

DRIVER 48V/100W
100W | 48V
220-240VAC | 50-60Hz
L/W/H 350x30x18
IP20 0.18 kg

STREX SYSTEM

CODE
90218901

DRIVER 48V/150W
150W | 48V
220-240VAC | 50-60Hz
L/W/H 350x30x18
IP20 0.28 kg

STREX SYSTEM

CODE
90218902

DRIVER 48V/250W
250W | 48V
220-240VAC | 50-60Hz
L/W/H 400x40x22
IP20 0.50 kg

STREX SYSTEM

CODE
90218903

PAR16 FLAT HEAD
PAR16 | GU10
220-240VAC | 50-60Hz
IP20 0.06kg



CODE
90059125

DALI TO PHASE-CUT DIMMING MODULE
for converting a DALI signal
to phase-cut dim
LED | 10-300W | 230V
L/W/H 120x30x22
IP20

CODE
90270901

CONNECTION BOX 3P PAR16
incl. strain relief | 3 pole push
connector | incl. PAR16 socket
incl. through-wiring
L/W/H 75x35x25



CODE
90059126

CONNECTION BOX 5P
incl. strain relief | 5 pole push
connector | incl. through-wiring
L/W/H 70x60x30



CODE
90059120

DIMMER DIN RAIL
max. 200W LED | 230V
DIM leading /trailing edge
L/W/H 17x55x90
IP30



CODE
90019018

DIMMER BLUETOOTH FOR SWITCH
LED 3-200W | incandescent 15-200W
phase-cut dim | 220-240V | 50Hz
L/W/H 44x23x44
IP20



CODE
90019100

DIMMER FOR SWITCH
DIM leading /trailing edge
max. 200W LED | 230V
L/W/H 48x17.5x46
IP30



CODE
90019017

DALI DIMMER FOR SWITCH
230V | 50-60Hz
L/W/H 48x49x22
IP20 0.036kg



CODE
90019194

LED MODULE HO
12W | 350mA | 35Vf
1800-3000K | >90 CRI | 1050lm
compatibility on request
IP20 0.06kg CE 26°



	CODE
	905251W9
	905251B9

LED MODULE HO 2700K
12W | 350mA | 35Vf
2700K | >90 CRI | 1340lm
compatibility on request
IP20 0.06kg CE 26°



	CODE
	905251W3
	905251B3

LED MODULE HO 3000K
12W | 350mA | 35Vf
3000K | >90 CRI | 1410lm
compatibility on request
IP20 0.06kg CE 26°



	CODE
	905251W5
	905251B5

LED MODULE HO 4000K
12W | 350mA | 35Vf
4000K | >90 CRI | 1420lm
compatibility on request
IP20 0.06kg CE 26°



	CODE
	905251W7
	905251B7

LED AC MODULE 2700K
8W | COB 3-step | phase-cut dim
220-240V | >90 CRI | 2700K | 515lm
compatibility on request
IP20 0.08kg CE 31°



	CODE
	901268W3
	901268B3

LED AC MODULE 3000K
8W | COB 3-step | phase-cut dim
220-240V | >90 CRI | 3000K | 535lm
compatibility on request
IP20 0.08kg CE 31°



	CODE
	901268W5
	901268B5

PAR16 LED 2700K
6.5W | GU10 | phase-cut dim
175-250VAC | 50-60Hz
2700K |>90 CRI | 460lm
IP20 0.06kg CE 35°

PAR16 F



	CODE
	901228W3

PAR16 LED 2700K
6.5W | GU10 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 437lm |
IP20 0.06kg CE 35°

PAR16 G



	CODE
	901228B3

PAR16 LED 3000K
6.5W | GU10 | phase-cut dim
175-250VAC | 50-60Hz
3000K | >90 CRI | 500lm
IP20 0.06kg CE 35°

PAR16 F



	CODE
	901228W5

PAR16 LED 3000K
6.5W | GU10 | phase-cut dim
220-240VAC | 50-60Hz
3000K | >90 CRI | 457lm
IP20 0.06kg CE 35°

PAR16 G



	CODE
	901228B5

PAR16 LED 2700K
4.3W | GU10
220-240VAC | 50-60Hz
2700K | >80 CRI | 350lm
IP20 0.06kg CE 36°

PAR16 F



	CODE
	905227S2

PAR16 LED 3000K
4.3W | GU10
220-240VAC | 50-60Hz
3000K | >80 CRI | 350lm
IP20 0.06kg CE 36°

PAR16 F



	CODE
	905227S4

METAL SPRING CLIP
alternative front lamp fixation spring
for ø 50 lamp rings
MR16 | LED | PAR16 | max. 12W
DEEP ADJUST | **DEEP ASYM**
DEEP 2.0 | **PLANO STRANGE** ceiling
SPINEO | **SOLID**



	CODE
	90019700

SPRING CLIP
lamp fixation | push-in system
for ø 50 lamp rings
MR16 | LED | PAR16 | max. 12W
DEEP ADJUST | **DEEP ASYM**
DEEP 2.0 | **PLANO** | **STRANGE** ceiling
SPINEO | **SOLID**

	CODE
	900198W0
	900198S0
	900198G0
	900198Q0
	900198B0

QT14 LED 3000K
3W | G9 | 220-240VAC | 50Hz
3000K | >80 CRI | 300lm
RAY wall | **BOX** wall
IP20 0.03kg CE



	CODE
clear	9019G703

QT14 LED 3000K
3.5W | G9 | phase-cut dim
220-240VAC | 50-60Hz
3000K | 80 CRI | 250lm
DRO 1.0
IP20 0.03kg CE



	CODE
opal	9010G804

C35 LED 2700K
5.5W | E14 | phase-cut dim | 20-100%
220-240VAC | 50-60Hz
2700K | >90 CRI | 450lm
DRO 2.0
IP20 0.03kg CE



	CODE
opal	9003C103

A60 LED 2700K
9W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 800lm
DRO 3.0 | **ROOMOR** suspended
SHIEK
IP20 0.04kg CE



	CODE
opal	9003E152

A65 LED 2700K
14.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 1378lm
DRO 4.0
IP20 0.04kg CE



	CODE
opal	9003E153

G95 LED 2700K
11.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 1100lm
BISHOP
IP20 0.11kg CE



	CODE
opal	9003E154

A60 LED 2200K
6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 400lm
MIRRO 1.0
IP20 0.04kg CE



	CODE
gold mirror	9003E155

A60 LED 2700K
5W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 495lm
MIRRO 1.0
IP20 0.04kg CE



	CODE
gold mirror	9003E139

A60 LED 2700K
5.1W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 418lm
MIRRO 1.0
IP20 0.04kg CE



	CODE
silver mirror	9003E140

G95 LED 2200K
5.5W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 377lm
MIRRO 2.0, 3.0 | **RUVI**
IP20 0.07kg CE



	CODE
gold mirror	9003E156

G95 LED 2700K
5.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >95 CRI | 464lm
MIRRO 2.0, 3.0 | **RUVI**
IP20 0.07kg CE



	CODE
gold mirror	9003E142
silver mirror	9003E157

A60 LED 2200K
3.8W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95CRI | 247lm
WIRO 2.0, 3.8, 6.1, 6.5
CONE 1.0, 2.0, 3.0 | **J.J.W.**
IP20 0.04kg CE



	CODE
gold tinted	9003E109

A60 LED 2700K DIM
5.3W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 602lm
WIRO 2.0, 3.8, 6.1, 6.5
GLOBE 1.0, 2.0 | **J.J.W.**
IP20 0.04kg CE



	CODE
clear	9003E138

G95 LED 2200K
5.4W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 380lm
RUVI | **BISHOP**
IP20 0.07kg CE



	CODE
gold tinted	9003E111

ST64 LED 2200K DIM
5.4W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 532lm
IP20 0.05kg CE



	CODE
gold tinted	9003E110

G125 LED 2200K
5.1W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 388lm
IP20 0.11kg CE



	CODE
gold tinted	9003E112

T30-225 LED 2200K
5.3W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 428lm
WIRO 1.8, 3.8 | wall | **CONE**
DIAMOND | **GLOBE** 4.0
IP20 0.06kg CE



	CODE
gold tinted	9003E129

T30-225 LED 2700K
5.4W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >80 CRI | 506lm
WIRO 1.8, 3.8, 6.1, 6.5 | wall
CONE | **GLOBE** 4.0
IP20 0.06kg CE



	CODE
gold tinted	9003E136

T30-300 LED 2200K
7W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | >95 CRI | 582lm
WIRO 6.1, 6.5 | **DIAMOND**
GLOBE 1.0, 2.0, 5.0
IP20 0.08kg CE



	CODE
gold tinted	9003E130

T30-300 LED 2700K
6.8W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | >90 CRI | 632lm
WIRO 6.1, 6.5 | **DIAMOND**
GLOBE 1.0, 2.0, 5.0
IP20 0.08kg CE



	CODE
gold tinted	9003E135

PLANO 1.0
plasterkit



CODE
90017104

PLANO 2.0
plasterkit



CODE
90017105

LUNA 1.0 ROUND
plasterkit
not compatible with LUNA ROUND
IP44 1.0 LED HV
140x100 115



CODE
90017101

LUNA 1.0 SQUARE
plasterkit
not compatible with LUNA SQUARE
IP44 1.0 LED HV
140x100 115



CODE
90017102

LITO
plasterkit



CODE
90017119

THEMIS 1.7
plasterkit



CODE
90017111

THEMIS 2.7
plasterkit



CODE
90017112

STRANGE PETIT 1.0
aluminium plasterkit
64x64 7-17



CODE
90017202

STRANGE PETIT 2.0
aluminium plasterkit
64x117 7-17



CODE
90017205

STRANGE PETIT 3.0
aluminium plasterkit
64x169 7-17



CODE
90017208

STRANGE 1.0 | SNEAK TRIMLESS 1.0
aluminium plasterkit
86x86 8-32



CODE
90017120

STRANGE 2.0 | SNEAK TRIMLESS 2.0
aluminium plasterkit
156x86 8-32



CODE
90017121

PLASTERKITS

ACCESSORIES

DEEP ADJUST TRIMLESS
plasterkit
105-110 12.5, 15, 20, 25



CODE
90017209

ORIS 0.7
recessed housing incl. plasterkit
191x58 60



CODE
90012039

ORIS 0.8 | RETO 0.8
recessed housing incl. plasterkit
72x72 60



CODE
90012047

ORIS 1.3 | RETO 1.3
recessed housing incl. plasterkit
122x122 60



CODE
90012041

ORIS 2.0 | RETO 2.0
recessed housing incl. plasterkit
123x191 60



CODE
90012043

STRIPE 0.4 | 0.7
recessed housing incl. plasterkit
75x75 55



CODE
90012037

STRIPE 2.2
recessed housing incl. plasterkit
251x76 55



CODE
90012038

RECESSED HOUSING

ACCESSORIES

LITO
always use in combination with plasterkit
122x90 45



CODE
90012027

THEMIS 1.7
always use in combination with plasterkit
272x160 85



CODE
90012032

THEMIS 2.7
always use in combination with plasterkit
372x160 85



CODE
90012033

ORIS 0.7
concrete housing
192x58 60



CODE
90012044

ORIS 0.8 | RETO 0.8
concrete housing
72x72 60



CODE
90012046

ORIS 1.3 | RETO 1.3
concrete housing
121x121 60



CODE
90012040

ORIS 2.0 | RETO 2.0
concrete housing
123x191 60



CODE
90012042

MAP 0.6 | CHART 0.6
ground housing
137 110



CODE
90012201

MAP 0.9 | CHART 0.9
ground housing
137 130



CODE
90012202

MAP 1.2 | CHART 1.2
MAP ASYM 1.2 | CHART ASYM 1.2
ground housing
190 158



CODE
90012203

MAP 1.6 | CHART 1.6
MAP ASYM 1.6 | CHART ASYM 1.6
ground housing
220 184



CODE
90012204

BLACK DIFFUSER COVER ILANE

only for 1.0

	CODE
2m	911902B1
3m	911903B1

BLACK DIFFUSER COVER ILANE

only for 3.0

	CODE
2m	911912B1
3m	911913B1

MINI CONNECTOR | ILANE

strip to strip - continuous



	CODE
IP20	90014272

MINI CONNECTOR | ILANE

strip to wire



	CODE
IP20	90014268

MINI CONNECTOR | ILANE

strip to strip



	CODE
IP20	90014269

BLANK COVER



	CODE
1m	911001W0
1m	911001B0
2m	911002W0
2m	911002B0
3m	911003W0
3m	911003B0

DALI SELV DEVICE

for 48V system | max. 300W
48VDC
L/W/H 213x37x25



	CODE
	90019193

NON ELECTRICAL L-CONNECTOR RECESSED



	CODE
	90014256
	90014257

NON ELECTRICAL L-CONNECTOR SURFACE



	CODE
	90014258
	90014259

RECESSED

track | custom cuts | 48V | 15A | DALI



	CODE
< 1m	90014187CC
< 1m	90014188CC
< 2m	90014189CC
< 2m	90014190CC
< 3m	90014191CC
< 3m	90014192CC

CC = for lengths specifications please add four digits in mm

SURFACE

track | custom cuts | 48V | 15A | DALI



	CODE
< 1m	90014181CC
< 1m	90014182CC
< 2m	90014183CC
< 2m	90014184CC
< 3m	90014185CC
< 3m	90014186CC

CC = for lengths specifications please add four digits in mm

SUSPENDED

track | custom cuts | 48V | 15A | DALI



	CODE
< 1m	90014181CC
< 1m	90014182CC
< 2m	90014183CC
< 2m	90014184CC
< 3m	90014185CC
< 3m	90014186CC

CC = for lengths specifications please add four digits in mm

SUSP. INDIRECT LIGHT

track | custom cuts | 48V | 15A | DALI
with indirect light



	CODE
< 2m	900140W_CC
< 2m	900140B_CC
< 3m	900141W_CC
< 3m	900141B_CC

LIGHT COLOUR	LUMEN | CRI	CODE
3000K | 14W/m	950/m | >90	5

CC = for lengths specifications please add four digits in mm

1-PHASE TRACK

ACCESSORIES

TRACK ADAPTER 1.0
no space for driver
for suspended luminaires without steel wire | incl. strain relief
max. weight 10kg



	CODE
	90014044
	90014043

TRACK ADAPTER 2.0
no space for driver
for suspended luminaires without steel wire | incl. strain relief
max. weight 3kg



	CODE
	90014277
	90014278

ADJUSTABLE CORNER



	CODE
	90014042
	90014041

COVERPLATE I/L/T/X
only use with recessed tracks



	CODE
	90014126
	90014127

COVERPLATE END FEEDS
only use with recessed tracks



	CODE
	90014124
	90014125

X-CONNECTOR
can be used as feed



	CODE
	90014049
	90014050

T-CONNECTOR 1.0
can be used as feed
top view



	CODE
	90014010
	90014011

T-CONNECTOR 2.0
can be used as feed
top view



	CODE
	90014012
	90014013

T-CONNECTOR 3.0
can be used as feed
top view



	CODE
	90014014
	90014015

T-CONNECTOR 4.0
can be used as feed
top view



	CODE
	90014016
	90014017

3-PHASE TRACK

ACCESSORIES

CUTTING TOOL
for cutting the inner copper cables of 3-phase track and 48V track
CE TÜV



CODE
90014165

TRACK ADAPTER
no space for driver
for suspended luminaires without steel wire | incl. strain relief
max. weight 5kg



	CODE
	90014279
	90014280

HOOK
max. weight 5kg



	CODE
	90014284
	90014285

FLEXIBLE CONNECTOR



	CODE
	90014288
	90014289

X-CONNECTOR
can be used as feed



	CODE
	90014248
	90014249

T-CONNECTOR 1.0
can be used as feed
top view



	CODE
	90014228
	90014229

T-CONNECTOR 2.0
can be used as feed
top view



	CODE
	90014230
	90014231

T-CONNECTOR 3.0
can be used as feed
top view



	CODE
	90014232
	90014233

T-CONNECTOR 4.0
can be used as feed
top view



	CODE
	90014234
	90014235

HOOK
standard multi suspension hook
for ø5 plugs



CODE

90052025

90052024

HOOK
optional multi suspension hook
for ø6 plugs



CODE

90052066

90052065

STRAIN RELIEF
accessory for WIRO suspension or
for textile cables



CODE

90052064

CABLE WALL-CEILING BRACKET
for cable 4.25-5.5mm diameter



CODE

90019197

90019198

WIRO
cable wall bracket
only for WIRO textile cable



CODE

90052062

WIRO
ceiling hook



CODE

90052061

SHIEK 4.0 | 5.0
cable ring for 3 luminaires



CODE

90059123

90059121

SHIEK 4.0 | 5.0
cable ring for 4 luminaires



CODE

90059124

90059122

HONEYCOMB
CENO | PIRRO
BLIEK ROUND PETIT



CODE

90051130

90051131

HONEYCOMB
CENO FORT ON TRACK 3 PHASE



CODE

90051132

ODREY
inner cover for 1.6 | 1.7



CODE

911420W0

911420G0

911420B0

CORK
bottle 1 | clear glass



CODE

90019013

CORK
bottle 2 | clear glass with closing cap



CODE

90019014

BOX | RAY
flaps for adjustable beam angle
powder coated white



CODE

900401W0

STAKE
snoot



CODE

90019004

X-BEAM
snoot



CODE

90019023

POLE 200
STIPO 3.0, 4.0



	CODE
	910062A0
	910062Q0

POLE 400
STIPO 3.0, 4.0



	CODE
	910064A0
	910064Q0

POLE 600
STIPO 3.0, 4.0



	CODE
	910066A0
	910066Q0

POLE 400
straight pole | incl. ground spike
SWAM



	CODE
	910090Q0
	910090B0

POLE 600
straight pole | incl. ground spike
SWAM



	CODE
	910091Q0
	910091B0

POLE 800
straight pole | incl. ground spike
SWAM



	CODE
	910092Q0
	910092B0

POLE 400
curved pole | incl. ground spike
SWAM



	CODE
	910093Q0
	910093B0

POLE 600
curved pole | incl. ground spike
SWAM



	CODE
	910094Q0
	910094B0

POLE 800
curved pole | incl. ground spike
SWAM



	CODE
	910095Q0
	910095B0

POLE 170
with concrete ground fixation
FIFTY FIFTY | **SWAY**
PALOS ROUND | **PALOS CARRÉ**



	CODE
	910073D0
	910073A0
	910073Q0
	910073B0

POLE 170
with fixation plate
FIFTY FIFTY | **SWAY**
PALOS ROUND | **PALOS CARRÉ**



	CODE
	910013D0
	910013A0
	910013Q0
	910013B0

POLE 270
with fixation plate
FIFTY FIFTY | **SWAY**
PALOS ROUND | **PALOS CARRÉ**



	CODE
	910014D0
	910014A0
	910014Q0
	910014B0

POLE 470
with fixation plate
FIFTY FIFTY | **SWAY**
PALOS ROUND | **PALOS CARRÉ**



	CODE
	910016D0
	910016A0
	910016Q0
	910016B0

POLE 670
with fixation plate
FIFTY FIFTY | **SWAY**
PALOS ROUND | **PALOS CARRÉ**



	CODE
	910018D0
	910018A0
	910018Q0
	910018B0

POLE 870
with fixation plate
FIFTY FIFTY | **SWAY**
PALOS ROUND | **PALOS CARRÉ**



	CODE
	910010D0
	910010A0
	910010Q0
	910010B0

POLE 270
with concrete ground fixation
FIFTY FIFTY | **SWAY**
PALOS ROUND | **PALOS CARRÉ**



	CODE
	910074D0
	910074A0
	910074Q0
	910074B0

POLE 470
with concrete ground fixation
FIFTY FIFTY | **SWAY**
PALOS ROUND | **PALOS CARRÉ**



	CODE
	910076D0
	910076A0
	910076Q0
	910076B0

POLE 670
with concrete ground fixation
FIFTY FIFTY | **SWAY**
PALOS ROUND | **PALOS CARRÉ**



	CODE
	910078D0
	910078A0
	910078Q0
	910078B0

POLE 870
with concrete ground fixation
FIFTY FIFTY | **SWAY**
PALOS ROUND | **PALOS CARRÉ**



	CODE
	910070D0
	910070A0
	910070Q0
	910070B0

X-BEAM
ground spike



CODE
90013115

SWAM
ground fixation



CODE
90019019

TAPE | PACE
ground spike



CODE
90013102

GETTON
ground spike



CODE
90013101

LINUS
ground spike



CODE
90013103

LINUS
ground fixation



CODE
90013302

PALLUZ
ground fixation



CODE
90013303

STAKE 1.0 | STIPO
ground spike



CODE
90013106

STAKE FOLD
ground spike



CODE
90013107

PALLUZ 470



CODE
910036D0

PALLUZ 670



CODE
910038D0

LINUS 150



CODE
910024D0
910024A0
910024Q0

LINUS 350



CODE
910026D0
910026A0
910026Q0

LINUS 550



CODE
910028D0
910028A0
910028Q0

GETTON 275



CODE
910052A0

GETTON 475



CODE
910054A0

PALLUZ 100



CODE
910033D0

GETTON 675



CODE
910058A0

NO MORE MISUNDERSTANDINGS

ICONS AND STANDARDS

Standard Service Life of Wever & Ducré products
The standard service life for Wever & Ducré luminaires is at least L70/B50 after 50000 hours of operation.
Nach der Standardlebensdauer von 50.000 Stunden erfüllen die Leuchten von Wever & Ducré mindestens die Anforderungen der Klasse L70/B50.
De standaard levensduur van Wever & Ducré armaturen is minstens L70/B50 na 50.000 branduren.
La durée de vie standard de nos appareils Wever & Ducré est de 50.000 heures et satisfont aux exigences de la classe L70/B50.
La vida útil estándar de las luminarias Wever & Ducré corresponde como mínimo al factor L70/B50 tras 50.000 horas de funcionamiento.
Dopo la durata standard di 50.000 ore, gli apparecchi di Wever & Ducré soddisfano almeno i requisiti della classe L70/B50.
После стандартного срока службы светильников в 50 000 часов светильники Wever & Ducré как минимум соответствуют требованиям класса L70/B50.

LED Quality Standard of Wever & Ducré products
The Standard of all our LED is defined by a minimun of a SDCM 3 (3-step MacAdam ANSI binning).
Der Standard unserer LEDs entspricht mindestens SDCM 3 (ANSI-Norm mit 3-stufigem MacAdam-Binning).
Onze leds voldoen minimal aan 3 SDCM (3-step MacAdam AINSI binning).
Le standard de toutes nos leds correspond au minimum à SDCM 3 (3-step MacAdam ANSI binning).
El estándar de todos nuestros LED corresponde al menos a SDCM 3 (norma ANSI con binning de MacAdam en 3 etapas).
Lo standard di tutti i nostri LED corrisponde almeno a SDCM 3 (standard ANSI con binning MacAdam a 3 livelli).
Характеристики всех наших светодиодов соответствуют как минимум SDCM 3 (3-ступенчатой сортировке Макадама по стандарту ANSI).

ICON	ENGLISH	GERMAN	FLEMISH	FRENCH	SPANISH	ITALIAN	RUSSIAN
	Cutout Round	Ausschnitt rund	Ronde inbouwopening	Découpe ronde	Corte circular	Taglio tondo	Вырез круглый
	Cutout Square	Ausschnitt eckig	Rechthoekige inbouwopening	Découpe rectangulaire	Corte rectangular	Taglio quadro	Вырез квадратный
	Recessed Depth	Einbautiefe	Inbouwdiepte	Profondeur d'encastrement	Profundidad de empotramiento	Profonditá dell'incasso	Установочная глубина
	Low Recessed Depth	Geringe Einbautiefe	Lage inbouwdiepte	Encastré Profondeur faible	Reducida profundidad de empotramiento	Profonditá dell'incasso ridotta	Низкая глубина встраивания
	Thickness	Stärke	Dikte	Épaisseur	Espesor	Spessore	Толщина
0°-X°|X°	Rotatable vertically | horizontally	Drehbar vertikal | horizontal	Draaibaar verticaal | horizontaal	Orientable verticalement | horizontalement	Orientable en vertical | horizontal	Girevole in verticale | orizzontale	Наклонный по вертикали | горизонтали
	Beam Angle	Abstrahlwinkel	Reflectorhoek	Faiseau	Ángulo de apertura	Angolo di apertura (del fascio)	Угол светового луча
	Class 1 Fixture	Leuchte der Klasse 1	Toestel klasse 1	Appareil classe 1	Aparato de clase 1	Lampada classe 1	Светильник класса 1
	Class 2 Fixture	Leuchte der Klasse 2	Toestel klasse 2	Appareil classe 2	Aparato de clase 2	Lampada classe 2	Светильник класса 2
	Class 3 Fixture	Leuchte der Klasse 3	Toestel klasse 3	Appareil classe 3	Aparato de clase 3	Lampada classe 3	Светильник класса 3
IP20	IP rating	Schutzklasse	IP rating	Indice de protection	Grado IP	Grado di protezione IP	Степень защиты IP
IK 01	IK rating	Schlagfestigkeit	IK rating	IK rating	Grado IK	IK rating	Ударопрочность IK
UGR≤19	Screen-compatible workplace light	Bildschirmtaugliche Arbeitsplatzleuchte	Werkplekverlichting is compatibel met beeldscherm	Éclairage compatible pour écran d'ordinateur	Iluminación para puestos de trabajo compatible con pantallas	Luce compatibile con le postazioni di lavoro	Освещение, подходящее для рабочего места с монитором
IC rated	IC rated: may be covered with insulation material	IC Rated: kann mit Isoliermaterial abgedeckt werden	IC classificatie: kan worden bedekt met isolatiemateriaal	Classé IC: peut être recouvert d'un matériau isolant	Clasificación IC: puede cubrirse con material aislante	Protezione IC. Può essere coperto con materiale isolante	Степень защиты IC: может быть покрыт изолирующим материалом
CE	CE conform	CE-konform	CE-conform	Conformité CE	Conformidad CE	Conformità CE	соответствие CE

ICON	ENGLISH	GERMAN	FLEMISH	FRENCH	SPANISH	ITALIAN	RUSSIAN
	ENEC Certificate	ENEC Zertifikat	ENEC Certificaat	Certificat ENEC	Certificado ENEC	Certificato ENEC	Сертификат ENEC
	UL Certificate	UL Zertifikat	UL Certificaat	Certificat UL	Certificado UL	Certificato UL	Сертификат UL
	Risk of injury (strangulation)	Verletzungsgefahr (Strangulierung)	Risico op verwonding	Risque de blessure	Riesgo de lesiones (estrangulación)	Rischio infortunio (strangolamento)	Травмоопасность (удушение)
Kelvin	Colour Temperature	Farbtemperatur	Kleurtemperatuur	Température de couleur	Temperatura de color	Temperatura colore	Цветовая температура
Blue lines	Part not included	Teil nicht inkludiert	Niet inbegrepen	Pièce non comprise	Parte no incluida	Articolo non incluso	Не входит в комплект
A - G	Energy labelling regulation	Verordnung über die Energiekennzeichnung	Energie-etiketteringsverordening	Règlement sur l'étiquetage énergétique	Reglamento sobre el etiquetado energético	Regolamento sull' etichettatura energetica	Маркировка потребления энергии
	Light source replaceable by end user	Lichtquelle durch Endverbraucher austauschbar	Lichtbron door eindgebruiker te vervangen	Source lumineuse remplaçable par l'utilisateur final	Fuente luminosa sustituible por el usuario	Sorgente luminosa sostituibile dall'utente finale	Замена лампы возможна для конечного пользователя
	Light source not replaceable	Lichtquelle nicht austauschbar	Lichtbron niet te vervangen	Source lumineuse non remplaçable	Fuente luminosa no sustituible	Sorgente luminosa non sostituibile	Замена лампы невозможна
	Control gear replaceable by end user	Betriebsgerät durch Endverbraucher austauschbar	Besturing door eindgebruiker te vervangen	Dispositif de commande remplaçable par l'utilisateur final	Mecanismo de control sustituible por el usuario	Dispositivo di controllo sostituibile dall'utente finale	Замена устройства управления возможна для конечного пользователя
	Control gear not replaceable	Betriebsgerät nicht austauschbar	Besturing niet te vervangen	Dispositif de commande non remplaçable	Mecanismo de control no sustituible	Dispositivo di controllo non sostituibile	Замена устройства управления невозможна
	Light source replaceable by authorized professional	Lichtquelle durch autorisierte Fachleute austauschbar	Lichtbron door erkende vakmensen te vervangen	Source lumineuse remplaçable par un professionnel agréé	Fuente luminosa sustituible por un técnico autorizado	Sorgente luminosa sostituibile da tecnici specializzati autorizzati	Замена лампы возможна для уполномоченных специалистов
	Control gear replaceable by authorized professional	Betriebsgerät durch autorisierte Fachleute austauschbar	Besturing door erkende vakmensen te vervangen	Dispositif de commande remplaçable par un professionnel agréé	Mecanismo de control sustituible por un técnico autorizado	Dispositivo di controllo sostituibile da tecnici specializzati autorizzati	Замена устройства управления возможна для уполномоченных специалистов

HELLO, CAN YOU HEAR ME?

CONTACT

HEAD OFFICE + SHOWROOM

WEVER & DUCRÉ BV
Spinnerijstraat 99/21
8500 Kortrijk
Belgium
Phone +32 56 49 28 00
office@weverducre.com
weverducre.com

REPRESENTATIVE OFFICES

WEVER & DUCRÉ SWITZERLAND
Kellerstraße 22
6005 Lucerne
Switzerland
Phone +41 41 361 60 60
office.ch@weverducre.com

WEVER & DUCRÉ SPAIN
Gran Via de les Corts Catalanes, 654
08010 Barcelona
Spain
Phone +34 931 205 928
office.es@weverducre.com

WEVER & DUCRÉ FINLAND
Sörnäistenkatu 1
00580 Helsinki
Finland
Phone: +358 50 506 71 82
office.fi@weverducre.com

WEVER & DUCRÉ NORWAY
Drammensveien 288
0283 Oslo
Norway
Phone +47 24 07 61 11
office.no@weverducre.com

WEVER & DUCRÉ MIDDLE EAST
Office No. 704, HDS Business Center
Cluster M
Jumeirah Lakes Towers, DMCC
PO Box 336603 Dubai
United Arab Emirates
Phone +971 4 436 23 47
office.me@weverducre.com

WEVER & DUCRÉ AUSTRIA
Marxergasse 1B
1030 Vienna
Austria
Phone +43 1 526 47 84
showroom.at@weverducre.com

SHOWROOMS

WEVER & DUCRÉ GERMANY
Schanzenstraße 36, Geb. 234B
51063 Cologne
Germany
Phone +49 221 130 649 60
Fax +49 221 130 649 69
office.de@weverducre.com

WEVER & DUCRÉ ASIA PACIFIC
RM. 1413, Block A, Sea View Estate
2 Watson Road North Point
Hong Kong
Phone +852 211 069 24
Fax +852 310 640 96
office.hk@weverducre.com
office.cn@weverducre.com

WEVER & DUCRÉ FRANCE
10, Rue Pecquay
75004 Paris
France
Phone +33 1 402 981 01
office.fr@weverducre.com

WEVER & DUCRÉ FRANCE
36, Rue Juliette Récamier
69006 Lyon
France
Phone +33 4 72 811 199
office.fr@weverducre.com

WEVER & DUCRÉ SWEDEN
Hårdvallsgatan 18
115 46 Stockholm
Sweden
Phone +46 73 045 76 39
office.se@weverducre.com

WEVER & DUCRÉ ITALY
Via Monte Popera 4/2
30027 San Donà di Piave - Venezia
Italy
Phone +39 0421 177 83 88
office.it@weverducre.com

WEVER & DUCRÉ UK
23 Batemans Row
EC2A 3HH London
United Kingdom
Phone +44 203 174 01 77
info.uk@weverducre.com

WEVER & DUCRÉ POLAND
Diamond Business Park
Posag 7 Panien Street no 1
02-495 Warsaw
Poland
Phone +48 730 330 358
office.pl@weverducre.com

WEVER & DUCRÉ AUSTRIA
Gleisdorfer Gasse 15
8010 Graz
Austria
Phone +43 316 317 085 91
showroom.at@ weverducre.com

WEVER & DUCRÉ NETHERLANDS
info.nl@weverducre.com

WEVER & DUCRÉ RUSSIA
russia@weverducre.com

©WEVER & DUCRÉ® BV

1ST EDITION, MAY 2022

All prices are non-binding recommended prices excluding VAT, lamps (bulbs) are not included. The prices and terms of payment stated in our order confirmation shall apply. To all prices and all extra expenses, we add the legally applicable value added taxes. Should our costs increase by the time of delivery, the prices can be recalculated on a pro rata basis. The prices stated shall apply net ex works. Information on availability as well as delivery terms and dates are provided as a point of reference only and are not binding. Prices are valid till the publication of a new price list. We expressively reserve the right to make changes in price, measurements and design. The details provided in this catalogue were correct at the time of publication. They do not constitute any kind of obligation on our part and are for information only. We shall not be held liable for any discrepancies between the illustrations or descriptions given and the actual product neither for any misprints and/or typing errors.
We reserve the right to make alterations or modifications to our products at any time. All mentioned RAL codes are indicative and approximative. We shall not be held liable for any discrepancies which may occur. All mentioned lumen values refer to white luminaires (in terms of finishing, covers or housings). Further lumen values on request. The general terms and conditions of Wever & Ducré BV shall apply to all purchases and orders. The applicable version of the general terms and conditions can be viewed at weverducre.com/en/downloads.

What's that? A whole new product range, and already several project references? See it this way: Inspiration is key to success in design, so what we care for most is inspiring you and showing you the potential of what we at Wever & Ducré do. Thus, we took the liberty of editing some (original) images to give you an impression of how our luminaires improve living, office, outdoor, and other spaces. These pictures are marked with an (V)

ThermoX® is a registered trademark of KAISER GmbH & Co KG (kaiser-elektro.de), a company independent of Wever & Ducré.

ARTWORK Jonas Devacht, Wever & Ducré, Evolis 118, 8530 Harelbeke, Belgium
GRAPHIC DESIGN Carina Erlach, Valerie Thaller, Sara Wilfling
PRINT PRODUCTION Valerie Thaller, René Zavadilik
ILLUSTRATION Carina Erlach, Lukas Hochenwarter
TEXT Tanja Petschnig, Renate Buzzi
LITHOGRAPHY Volker Waldhauser
PROJECT MANAGEMENT Renate Buzzi, Sabrina Schrauf
PRINTING Drukarnia Perfekt S.A., Warsaw, Poland
PHOTOGRAPHY - Apresvino - (p. 460-461) | © nina Struve for VRAI interior architecture (p. 90) | © stella (p. 8-10, 16, 19-21, 752) | Aikon Producties-bvba (p. 92) | Aleksandr Dal Cero (p. 232) Alexander Maria Lohmann (p. 230) | Álvaro Valdecantos (p. 688, 696, 700) | Andrea Badrutt Fotografie (p. 306) | Christoph Panzer (p. 430-431) | Andrei Valeriu Radulescu (p. 250) | Architekturfotografie Oliver Hallwirth (p. 424) | B.C. Gassner (p. 608) | Biderbost Photo (p. 442-443, 536) | Bob Reijnders (p. 192-193, 326, 342) Catherine Roider (p. 34, 100) | Christian Brandstätter (p. 618) | Christian Repnik (p. 712) | Christoph Steinbauer (p. 364, 482, 588, 594, 662, 702) | Corinna Unterkofler/ Joachim Grubelnik (p. 412, 656, 684) | Dani Rovira Fotografia (p. 714) | Davide Perbellini (p. 52, 384-385) | Edgar Navarre (p. 514-516) | Elena Egger (p. 88-89) | Ella Kuhn Photography (p. 152) | Erich Sinzinger 2019 (p. 158) | Erik Ďuriš (p. 62-63) | Evgenij Avramenko (p. 284) | Georges Leroux (p. 115) | Gerald Van Rafelghem (p. 670) Hanne Joosen fotografie (p. 72 , 252) | Harald Eisenberger (p. 108) | Jack Lovel (p. 502) | Jaro van Meerten - The Art of Living magazine (p. 178, 388) | Jean Marc Manson (p. 238) Jiří Dymáček (p. 636-637) | Joachim Grothus/Herford/Germany (p. 272) | Jurrit van der Waal - The Art of Living magazine (p. 510) | KAPFHAMMER (p. 50) | Kim Forssén (p. 456, 642) | Kris Dekeijser (p. 11, 26, 38-39, 48, 54-58, 66, 70, 73, 76-78, 94, 98-99, 104-106, 112, 116-118, 121, 124-132, 138-151, 156, 160, 168-174, 176, 182, 188, 194, 200, 204-211, 216-220, 224, 228, 240- 244, 248, 254, 258-262, 266-269, 270, 282, 285-288, 302-304, 312, 324, 330, 336, 360-363, 376-382, 400, 402, 404, 410, 414-420, 426-428, 434, 446, 448-452, 458, 466, 470- 475, 486-488, 508, 518, 532, 542, 562-565, 570, 592-593, 596-600, 604, 614, 628-630, 640, 646-648, 658, 664, 676-678, 686, 690-693) Kris Dimitriadis/Kurt Dekeyzer studio PSG 2021 (p. 538) | Kurt Hoerbst (p. 484, 606) | Kurt Kuball, (p. 120, 584, 620, 624, 644, 672, 694, 698) | Lukas Jahn (p. 616, 716) Marc Díez (p. 36) | Marc Hadden Photography (p. 422) | Marco Richter Photography (p. 572-573) | Martin Baitinger (p. 102-103) | Mattila Aquila (p. 246) Miquel Llonch (p. 553) | Miriam Raneburger (p. 610) | nunofoto.com (p. 632) | Patricia Goijens (p. 28) | Paul Karalius (p. 652, 704) | paul ott photografiert (p. 634, 666) Paula Beetlestone (p. 638) | Philip Kottlorz Fotografie (p. 32, 44, 368) | Robin Bonnier with KREW COLLECTIVE (Cover, p. 14-15) | Salvatore Guido (p. 18, 30, 40-43, 46, 60-61, 64-65, 68, 74, 80-82, 110, 164, 186, 190, 196, 212, 222, 256, 264-265, 274-279, 290-300, 310, 328-329, 332-334, 338, 350-357, 366, 386, 398, 432, 436-440, 444, 462, 478, 494-500, 520-523, 528-531, 534, 540, 544-552, 554-561, 568, 574-578) | SCHWARZ – LICHT / fotografie + kommunikation (p. 395, 454) | Selma Hengeveld (p. 96) Sergey Bezuglov (p. 180, 280) | Sergio Camplone (p. 198, 383) | Studio Ciao (p. 154, 464) | Studio Erick Saillet (p. 162) | Thomas De Bruyne | cafeine.be (p. 449) Walters Media (p. 504-507) | Wide Shot Photography - Alexandre Van Battel (p. 122) | www.foto-stoebich.com (p. 308) | Zvonimir Mihaljek (p. 626)

INSPIRED BY THE ARCHITECTURE OF BELGIUM

COLOURS AND MATERIALS



SG	Silk Grey | wet painted | RAL 7044	
PS	Stay together | similar to RAL 000 75 00	
MG	Give warmth | similar to RAL 080 80 10	
FJ	Feel Jade | similar to NCS S 2005 – G90Y	
TS	Taupe Striped | Glass handblown	
TW	Taupe White | Glass handblown	
DW	Dark Taupe | Glass handblown	
TD	Taupe Diamond | Glass handblown	
FD	Frosted Opal | Opal glass handblown	
Y	Brown | Opal glass handblown	
B	Smoked | Glass handblown	
WB	White | Opal glass handblown	
MB	Black | Marble	
MW	White | Marble	
I	Inox | 304 Stainless steel electro polished	

C	Chrome | Steel glossy chrome plated	
V	Rust | Steel varnished rusted	
S	Silver | Aluminium powder coated without texture	
RW	Coral Red and White Texture Aluminium wet painted	
OR	Traffic Orange | Polypropylene RAL 2009	
SB	Water Blue | Polypropylene RAL 5021	
YE	Colza Yellow | Polypropylene RAL 1021	
W	White | LLDPE	
F	Grey | Recycled PET felt	
D	Dark Grey Texture Composite material wet painted	
LB	Black | glossy aluminium	
GB	Black/Light Gold Composite material	
NB	Black/Black Chrome Composite material	
A	Aluminium anodised	
GW	Cement Grey and White Aluminium wet painted	
A	Anthracite Grey | Aluminium powder coated texture | RAL 7016	

B	Black matt | Aluminium powder coated wet painted*	
G	Gold | Aluminium painted/brushed	
P	Copper | Steel varnished lacquered	
Q	Bronze | Aluminium painted/brushed	
W	White matt | Aluminium or steel powder coated wet painted*	
L	Aluminium brushed	
M	Champagne	
BQ	Black Texture and Bronze Aluminium	
Z	Black Texture and Copper Aluminium powder coated	
K	Black Texture and Gold Aluminium wet painted	
GB	Gold Aluminium wet painted Black Texture	
J	White Texture and Gold Aluminium wet painted	
E	White Texture and Black Aluminium powder coated brushed	
CH	Black | Champagne	
H	Champagne | Black	

*for specific information on colour and finishes please refer to weverducre.com/materials

back

